


# DLD 15W DALI DIMMABLE DRIVER

280 / 350 / 450mA CONSTANT CURRENT  
DLD15AD-1WMC-0

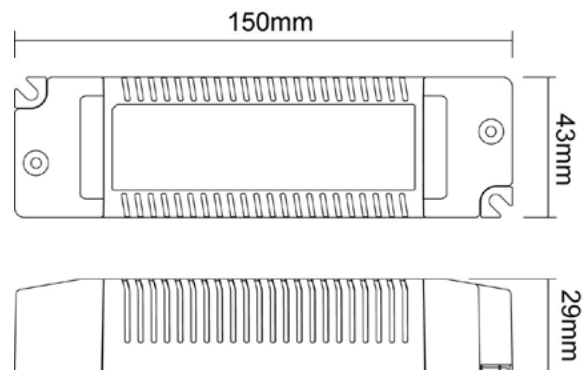

## Dimensions

L.150mm W.43mm H.29mm



## OVERVIEW

- Single channel constant current output, selectable multilevel current
- Efficiency 82%
- Active PFC
- Smooth dimming curves, without flicker
- Short circuit, overload, over temperature functions
- IP20
- PWM digital dimming - CRI unaffected
- Built-in MCU, customized logarithmic or linear dimming curve
- Second level of security isolation, output ripple is less than 3%
- Load range 10%-100%
- Supports five in one dimming
- (DALI/I1-10V active signal / PWM signal / adjustable resistance/Touch DIM)
- 3 year warranty

**DLD 15W DALI DIMMABLE DRIVER**  
 280 / 350 / 450mA CONSTANT CURRENT  
 DLD15AD-1WMC-0



**TECHNICAL SPECIFICATIONS**

<b>OUTPUT</b>			
<b>Current</b>	280mA	350mA	450mA
<b>Voltage</b>	9-40VDC	9-40VDC	9-33VDC
<b>Power</b>	11.2V	14V	14.85V
<b>Current accuracy</b>	±5%		
<b>No load output voltage</b>	50VDC		
<b>Output LF current ripple</b>	< 3% (< 120 Hz)		
<b>Channels</b>	1		
<b>INPUT</b>			
<b>Voltage</b>	100-240VAC		
<b>Frequency</b>	50/60Hz		
<b>Current</b>	0.1A max@230VAC		
<b>Power factor</b>	> 0.9 @ 230VAC, full load		
<b>Efficiency</b>	82% @ 230VAC, full load		
<b>Inrush current</b>	Cold start, 15A @ 230VAC		
<b>PROTECTION</b>			
<b>Short circuit</b>	Close output, recovers automatically after fault removed		
<b>FUNCTION</b>			
<b>Dimming</b>	DALI dimming / 1-10V active signal / adjustable resistance / PWM / Touch DIM		
<b>Priority order</b>	DALI > (1-10V active signal / adjustable resistance / PWM) > Touch DIM		
<b>MISC.</b>			
<b>Dimensions</b>	L.150mm W.43mm H.29mm		
<b>Gross weight</b>	130g		
<b>Working temperature</b>	-20°C ~ 40°C		
<b>Relative humidity</b>	20~90% RH		

# DLD 15W DALI DIMMABLE DRIVER

280 / 350 / 450mA CONSTANT CURRENT  
DLD15AD-1WMC-0




## WIRING DIAGRAMS

### DALI MODE



### 0-10V / PWM / ADJUSTABLE RESISTANCE MODE

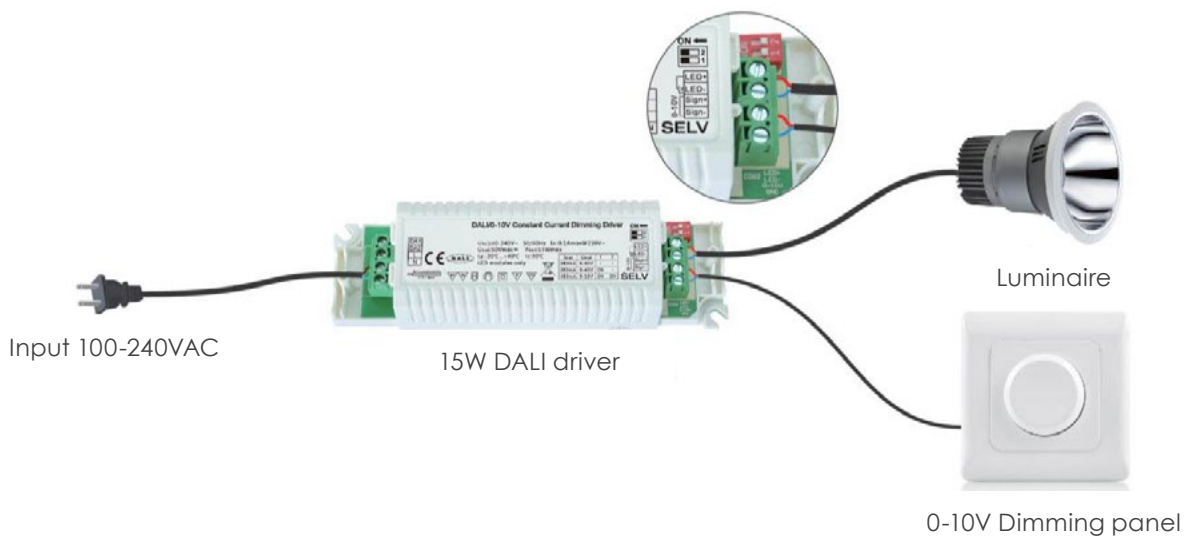

### TOUCH DIM MODE



DALI & 0-10V signal cannot be used simultaneously


# DLD 15W DALI DIMMABLE DRIVER

280 / 350 / 450mA CONSTANT CURRENT  
DLD15AD-1WMC-0




## WIRING DIAGRAMS

DALI DIAGRAM

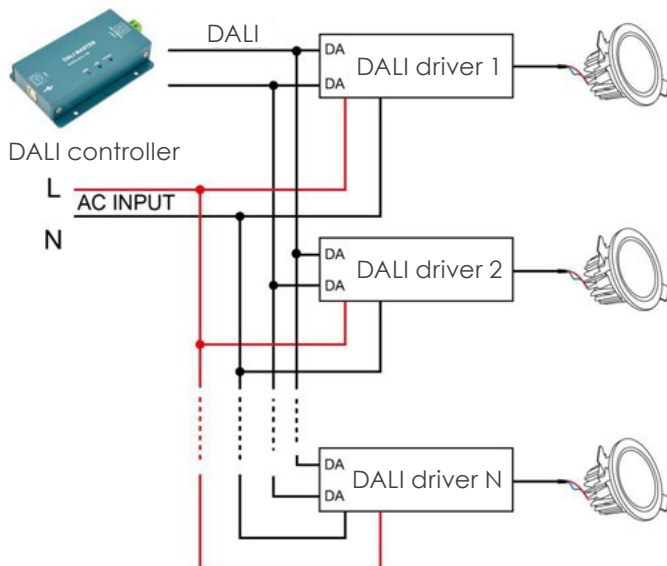

TOUCH DIM DIAGRAM

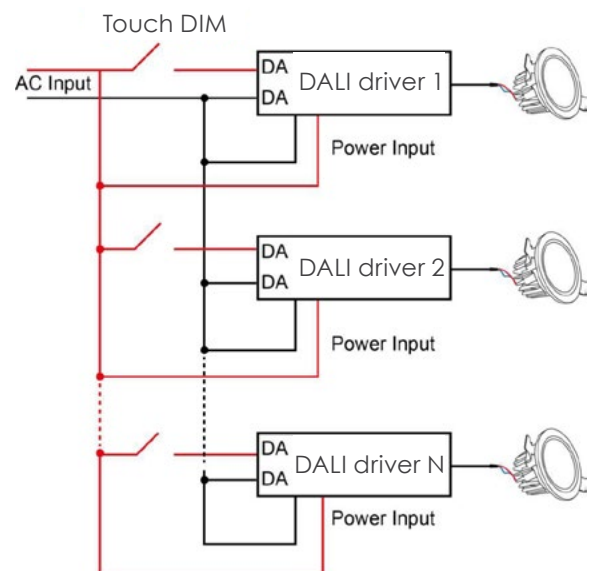

Only use open push button without indicator light. Maximum cable length between each unit is 20 meters.

## TOUCH DIM FUNCTION

1. Short press the Touch DIM switch (<0.5s) to control the lamp on or off.
2. Long press the Touch DIM switch (>0.5s) to dim the brightness of light. The dimming direction will change every time after pressing switch.
3. Double-click the Touch DIM switch (<0.3s), all lamps connected on the device will be set maximum brightness.
4. The brightness adjustment range is 1%-100%, the light can be turned off with a short press with the long press adjustment Touch DIM switch.
5. With the Power off memory function, the power-down state will be recovered when power on again.

# DLD 15W DALI DIMMABLE DRIVER

280 / 350 / 450mA CONSTANT CURRENT

DLD15AD-1WMC-0




## CURRENT SELECTION TABLE

Current	DIP-1	DIP-2
280mA	OFF	OFF
350mA	ON	OFF
450mA	ON	ON


Output current level selectable by DIP switch

## DIMMING CURVE

DALI DIMMING

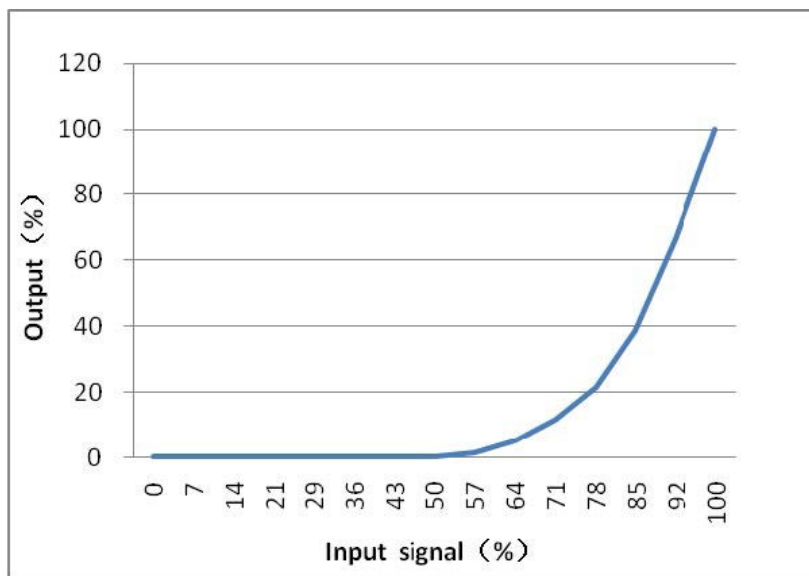

0-10V / PWM / ADJUSTABLE RESISTANCE

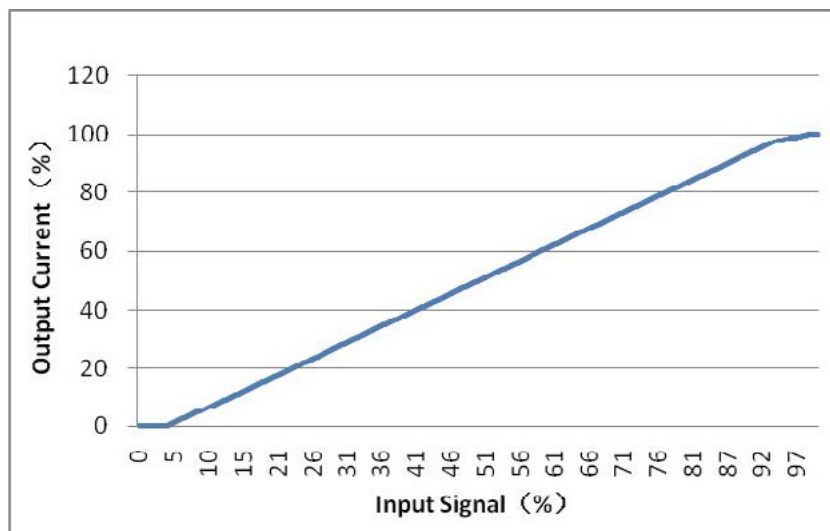

**DLD 15W DALI DIMMABLE DRIVER**  
280 / 350 / 450mA CONSTANT CURRENT  
DLD15AD-1WMC-0



**MISCELLEANEOUS**

- The product shall be installed and serviced by a qualified person.
- DALI and Touch DIM functions cannot be used simultaneously, which can be controlled respectively by using DALI controllers or with Touch DIM technology.
- This product is non-waterproof. Please avoid the sun and rain. When installed outdoors please ensure it is mounted in a water proof enclosure.
- Good heat dissipation will prolong the working life of the controller. Please ensure good ventilation.
- Please check if the output voltage and current of any LED power supplies used comply with the requirement of the product.
- Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current, and that the cable is secured tightly in the connector.
- Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- If a fault occurs please return the product to your supplier. Do not attempt to fix this product by yourself.

All the information in this document is provided in good faith. DLD Contract will not be held responsible for any losses due to inaccuracies within this document.

 **01189 889414**

 **[enquiries@dld-contract.co.uk](mailto:enquiries@dld-contract.co.uk)**

 **[dld-contract.co.uk](http://dld-contract.co.uk)**

DLD Contract Ltd  
Unit 9 Brookside Business Centre  
Church Road  
Swallowfield  
Reading  
Berkshire  
RG7 1TH