

- PENDANTS: thirty six
- CANOPY: white powder-coated rectangular canopy  
1100mm (43.3") x 370mm (14.6")
- LAMPING: 10w xenon or 1.5w LED (LED not dimmable)
- LENGTH OF COAX: determined by client 30500 (100') standard maximum
- INSTALLATION: jack connected (pendant lengths set during production)
- MATERIALS: Cast glass, blown borosilicate glass,  
braided metal coaxial cable, electrical components  
brushed nickel canopy
- WEIGHT: approximately 83.5kg (184lb)
- TRANSFORMERS: integral

#### DESCRIPTION

14.36 is a random configuration of thirty six 14 pendants hung from a rectangular canopy. The drop lengths of the pendants are randomized between a client specified range of heights to variously cluster and scatter. The result is an ambient chandelier or field of light.

The 14 is an articulated, seamed cast glass sphere with a frosted cylindrical void that houses a low voltage lamp. Individual pendants are visually quite subtle, but gain tremendous strength when multiplied and clustered in large groups.

#### NOTES

- + Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)
- + Unless otherwise noted when ordering, all chandeliers will be outfitted to be xenon compatible.
- + Note: As an alternative to a built-in transformer, Bocci recommends mounting transformers remotely in an easily accessible and hidden location for ease of long-term maintenance.

US patent # D556, 361 Worldwide patents issued and pending.  
Made in Vancouver, Canada

**BOCCI** Vancouver  
sales@bocci.ca  
www.bocci.ca

**BOCCI** Berlin  
europe@bocci.ca  
www.bocci.ca

approx 83.5kg (184lb)


RECTANGLE

# 14.36

Design by Omer Arbel  
PRODUCT SPECIFICATION

Approved to UL standards by CSA



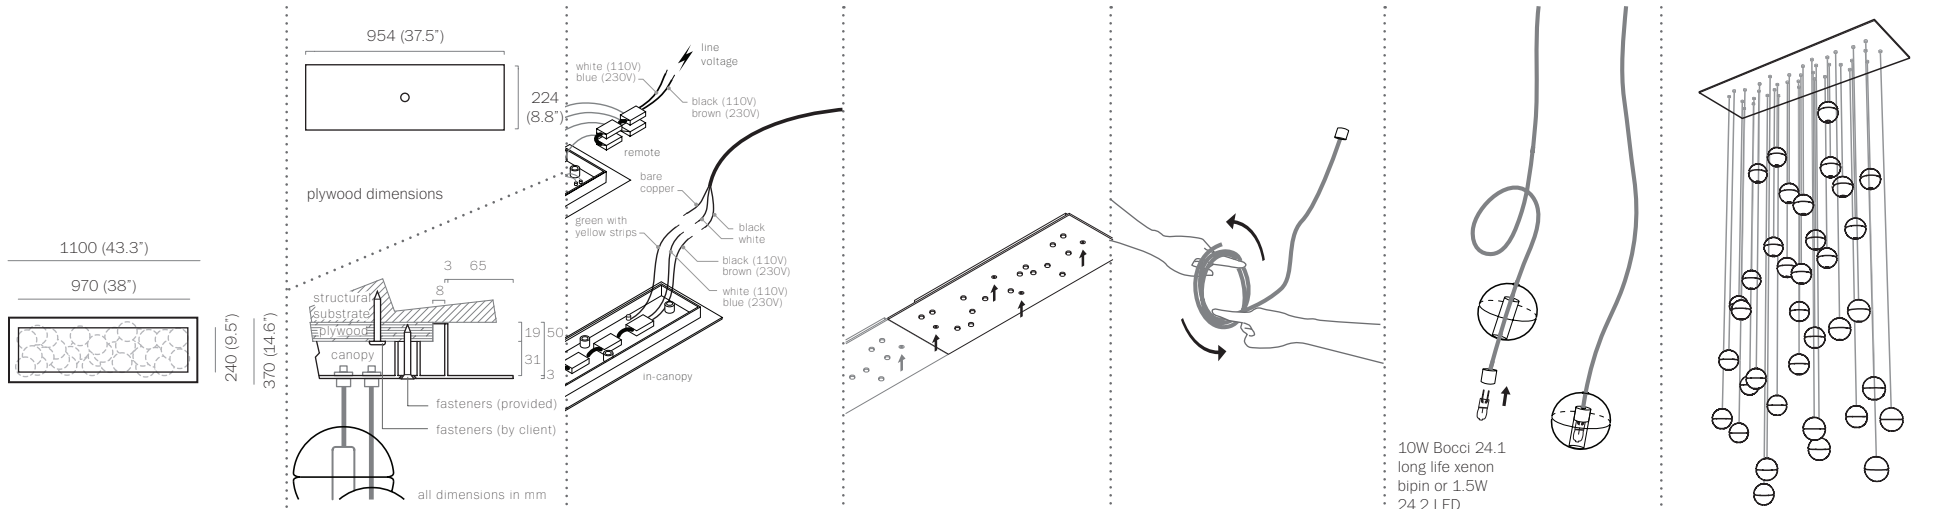

1

Measure and mark the chandelier canopy position on the ceiling.

2

Note: The client is responsible for providing a robust 3/4" (19mm) plywood backing or wood blocking to securely anchor to the structural substrate.

Connections from the plywood to the structural substrate are the client's responsibility. Measure the plywood so that it fits within the canopy side walls (refer to detail above).

Anchor the plywood backing to the structural ceiling substrate.

3

Connect transformers inside the canopy to line voltage. 110 V or 230 V depending on transformer.

For 110 V, connect black wire to the black wire and white wire to the white wire.

For 230 V, connect black wire to the brown wire and white wire to the blue wire.

For the ground connection, connect the green wire with yellow stripe to the bare copper wire or green wire in the junction box.

Note: As an option, Bocci recommends mounting transformers remotely in a close, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to insure compliance with the code.

4

Anchor canopy into the plywood backing using the fasteners provided.

If your chandelier has multiple canopies, mount all canopies, one by one, per the previous steps.

If your chandelier has only one canopy, proceed to step 5.

5

Remove the twist ties from the coaxial cable. Hold the roll vertically and insert your index fingers from opposite sides. Rotate your fingers in a spool like manner around each other to unroll the coaxial cable. Use patience; allow the cable to uncoil completely to avoid kinks.

6

Each pendant terminates in a "headphone jack" type connector, which plugs into a receiving receptacle in the canopy. Clients are encouraged to compose their own pendant configuration on site, thus creating a truly unique chandelier. After plugging in each pendant, turn the threaded sheathing into place by hand ensuring that it is adequately tightened. Tools are not required.

Bocci 24.1 long life bipin xenon lamp included. Bocci 24.2 LED optional. Lamping is transformer specific.

Plug the lamps into the sockets. Do not touch the lamps with your bare hands.

Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)

Note: when using a dimmer for xenon, use only a low voltage electronic dimmer.

7

Clean fingerprints from glass surfaces and turn the fixture on.

For additional assistance:

**BOCCI** Vancouver  
info@bocci.ca  
[www.bocci.ca](http://www.bocci.ca)

**BOCCI** Berlin  
europe@bocci.ca  
[www.bocci.ca](http://www.bocci.ca)

Worldwide patents issued and pending.

US patent # US D556,361

Made in Vancouver, Canada

Approved to UL standards by CSA



RECTANGLE

14.36

Design by Omer Arbel  
INSTALLATION INSTRUCTIONS