

DARKLIGHT DESIGN

DARKLIGHT DESIGN EIGER LED
WITH FRAME - PLASTER IN



T 01189 882294

W www.darklightdesign.com

E sales@darklightdesign.com


DARKLIGHT DESIGN

DARKLIGHT DESIGN EIGER LED WITH FRAME - PLASTER IN


SUMMARY

- Removable light engine - simple twist mechanism
- 15W, 350mA
- Adjustable by 30° tilt (adjustable version only)
- Complete with phase dimming driver
- Die-cast aluminium with steel housing
- Forged aluminium heat sink
- Plastic PC reflector
- In white and black

LED LIGHT ENGINES

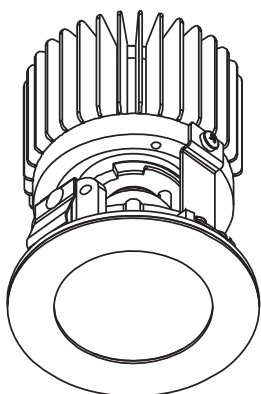

Fixed **IP44**
H. 112mm





Adjustable by 30° **IP20**
H. 112mm



DIMENSIONS AND CUT OUT SIZES - version with frame





Ø98mm



98x98mm





185x98mm





272x98mm



DIMENSIONS AND CUT OUT SIZES - plaster in version





Ø73mm



73x73mm



164x72mm



251x72mm

DARKLIGHT DESIGN

DARKLIGHT DESIGN EIGER LED WITH FRAME - PLASTER IN

TECHNICAL OVERVIEW

Version	Current	Voltage	Power	IP Rating	Lumen	CCT	Beam Angle	CRI	Dim
Eiger 1-R	350mA	36.7V	15W	IP20/44	1456lm	2700°K	20°/40°	80+	Yes
Eiger 1-R	350mA	36.7V	15W	IP20/44	1524lm	3000°K	20°/40°	80+	Yes
Eiger 1-R	350mA	36.7V	15W	IP20/44	1576lm	4000°K	20°/40°	80+	Yes
Eiger 1-S	350mA	36.7V	15W	IP20/44	1456lm	2700°K	20°/40°	80+	Yes
Eiger 1-S	350mA	36.7V	15W	IP20/44	1524lm	3000°K	20°/40°	80+	Yes
Eiger 1-S	350mA	36.7V	15W	IP20/44	1576lm	4000°K	20°/40°	80+	Yes
Eiger 2	350mA	36.7V	2x 15W	IP20/44	2x 1456lm	2x 2700°K	2x 20°/40°	80+	Yes
Eiger 2	350mA	36.7V	2x 15W	IP20/44	2x 1524lm	2x 3000°K	2x 20°/40°	80+	Yes
Eiger 2	350mA	36.7V	2x 15W	IP20/44	2x 1576lm	2x 4000°K	2x 20°/40°	80+	Yes
Eiger 3	350mA	36.7V	3x 15W	IP20/44	3x 1456lm	3x 2700°K	3x 20°/40°	80+	Yes
Eiger 3	350mA	36.7V	3x 15W	IP20/44	3x 1524lm	3x 3000°K	3x 20°/40°	80+	Yes
Eiger 3	350mA	36.7V	3x 15W	IP20/44	3x 1576lm	3x 4000°K	3x 20°/40°	80+	Yes