
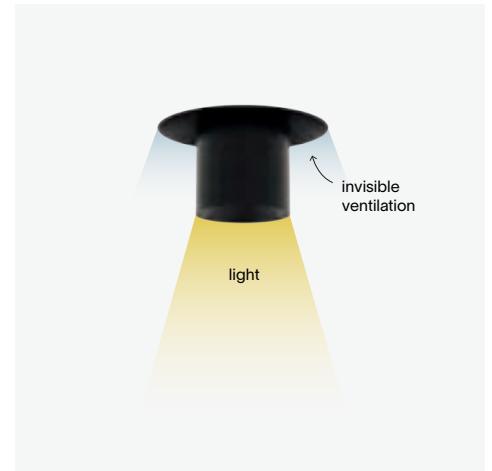


light + ventilation trim long

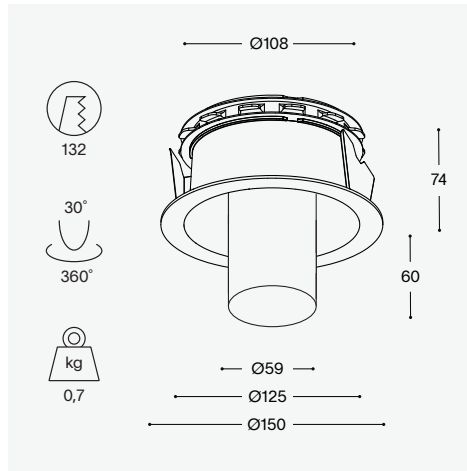

light specs

lamp	LED
reflector	glass lens
driver	excluded
IP	65
CRI	90+ / 97
class	III

ventilation specs

type	air extraction
air flow	max. 50m ³ /h
pressure	7 - 75 Pa
noise level	< 25 dB(A)
adjustment	32 steps
lock mechanism	integrated

luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
350mA (5.7W)	290 lm	420 lm	585 lm	585 lm	325 lm	460 lm	645 lm	645 lm
500mA (8.5W)	450 lm	555 lm	730 lm	730 lm	495 lm	610 lm	805 lm	805 lm
700mA (12.8W)	505 lm	720 lm	955 lm	955 lm	560 lm	795 lm	1055 lm	1055 lm


order number

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
black ano.	8000-2778	8000-1346	8000-1347	8000-2770	8000-2779	8000-1349	8000-1350	8000-2771
white struc.	8000-2782	8000-1358	8000-1359	8000-2774	8000-2783	8000-1361	8000-1362	8000-2775


light + ventilation trim long

ventilation - capacity graphs

air extraction

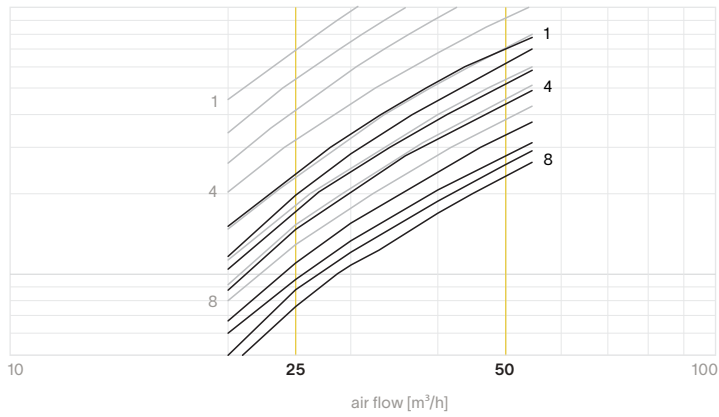

air supply*

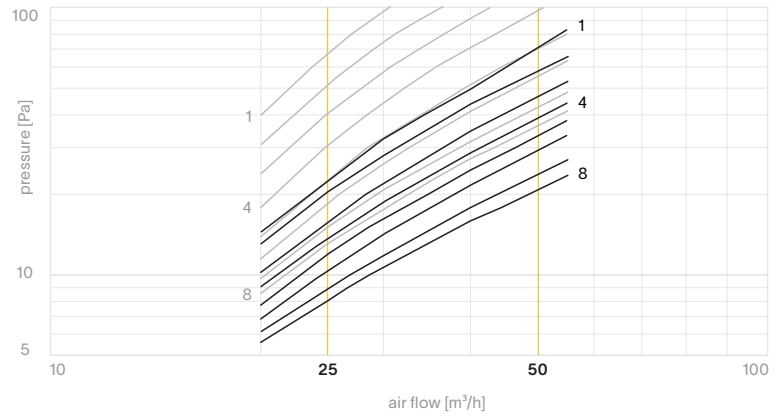

— with 25m³/h ring

— without 25m³/h ring

*downward airflow not suited for installation in or above comfort zones

accessoires

drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	1-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W