


trim spot Ø74

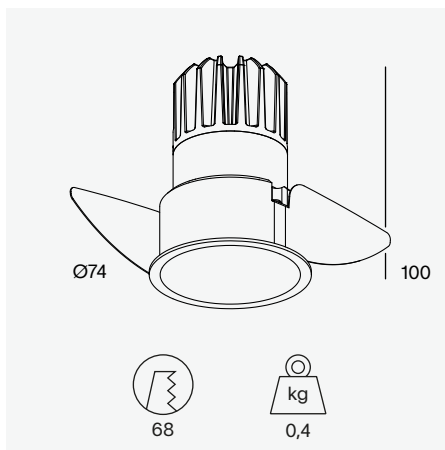

light specs

lamp	LED
optic	glass lens
driver	excluded
IP	↓ 65 ↑ 20
CRI	90+ / 97
class	III

accessories

drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	0-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W

luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
350mA (5.7W)	290 lm	420 lm	585 lm	585 lm	325 lm	460 lm	645 lm	645 lm
500mA (8.5W)	450 lm	555 lm	730 lm	730 lm	495 lm	610 lm	805 lm	805 lm
700mA (12.8W)	505 lm	720 lm	955 lm	955 lm	560 lm	795 lm	1055 lm	1055 lm

order number

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
black ano.	8000-1045	8000-1046	8000-1047	8000-1770	8000-1048	8000-1049	8000-1050	8000-1771
white struc.	8000-1051	8000-1052	8000-1053	8000-1774	8000-1054	8000-1055	8000-1056	8000-1775