


retrofit socket type G

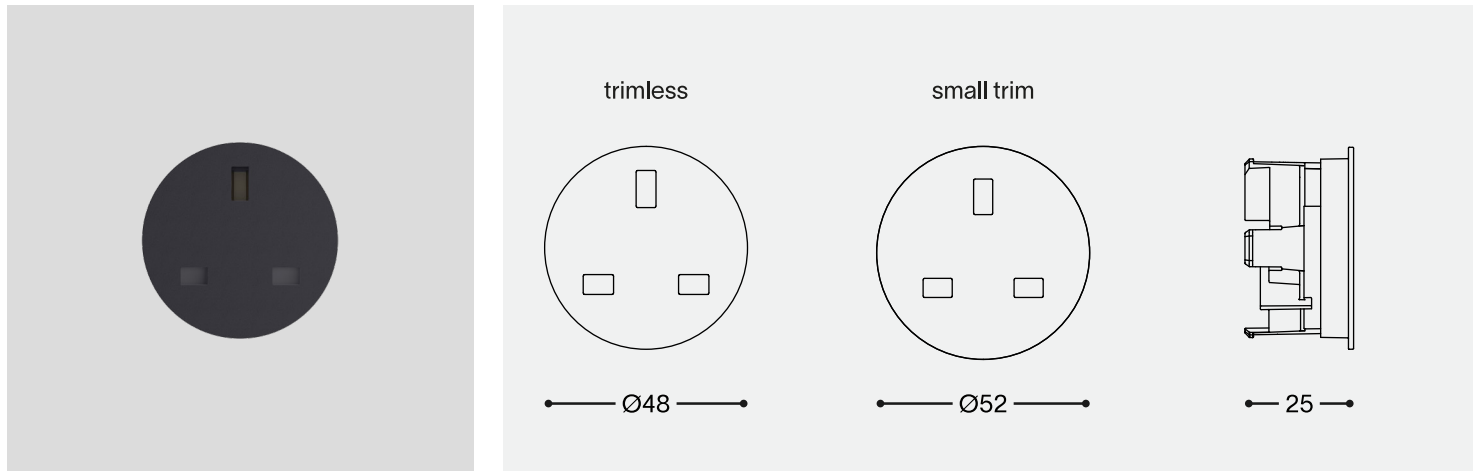

socket specs

application	13A/250V
flush-mounting depth	25 mm
number of gangs	1
box depth	minimum: 25 mm recommended: ≥ 35 mm
wire fixation	screw terminals (TX8)
IP, IK rating	IP20 IK06
marking	CE - UKCA
earth terminal	yes
switched	no

accessories

installation

8800 - 2018	retrofit plaster ring short
8800 - 2010	removal tool

order number

	trimless	small trim
black	8800 - 5020	8800 - 5023
cream	8800 - 5022	8800 - 5025
white	8800 - 5021	8800 - 5024