




Walkway Lite PURE LED

Cat. NO WW/L

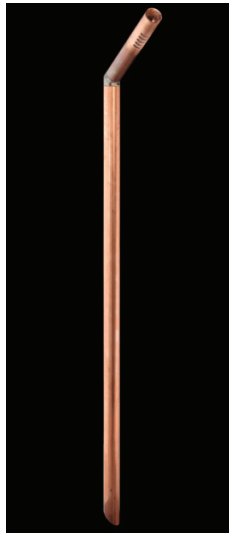

PURE LED
Pure Performance

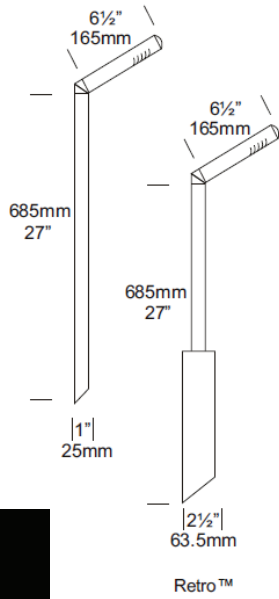

The Walkway Lite PURE LED has a subtle, unobtrusive appearance that allows it to blend into a landscape while providing a soft, effective pathway illumination without glare.

Constructed from solid copper with a solid brass elbow and stainless steel grub screws.

The Hunza PURE LED system uses the latest Cree XTE LED chips for maximum performance and long life. Power supply options include a choice of integral 12 volt driver or 110/240v (Retro) drivers. There is also an external remote driver (series connection) option. The PURE LED system incorporates an innovative Plug-and-Play system for easy replacement or upgrade of the LED engine.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer. The transformer has an IP56 rating.

*At 350mA this fitting is the equivalent of a 15w halogen fitting.
*At 700mA this fitting is the equivalent of a 20w halogen fitting.

Ordering Information

Luminaire	Driver mA	Colour Temp	Accessories	Material/Finish
WW/L	S - Series D3 - 12v 350mA D7 - 12v 700mA RE - 240v Retro RU - 110v Retro	3 - 3000K 4 - 4000K	CJK150 - Cable Joint Kit SSP/G - Hunza™ Super Spike	COP - Copper SS - Stainless

Ordering Example: WW/L S 3 CJK150 COP

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from copper:

Pole - copper 25.4mm (1") x 850mm (33½") tube.
End cap - solid copper 25.4mm (1") rod.
Elbow - Investment cast in brass.

Retro™

Pole - copper 25.4mm (1") x 410mm (16") tube.
Elbow - Investment cast in brass.
Transformer Pole 63.5mm (2½") x 440mm (17½")

Luminaire Weight

12 volt 1.10kg (2lb 6oz)
Retro™ 2.38kg (5lb 3oz)

Features

Lens:

22mm (¾") extra clear low iron flush fit shatter resistant glass.
Lifetime Warranty.

Gaskets:

Nytrol, 150°C (302°F).

Accessories:

Cable Joint Kit (Cat. CJK150)
Super Spike (Cat. SSP/G)
- Not for Retro.

Mounting

Pole 850mm (33½") directly mounted into the earth or for extra stability in sand or loose ground use a Hunza™ Super Spike. Retro™ set in concrete.

Technical Information

Standards

IP44 UL 1838

LED

Cree XTE Plug-and-Play, field replaceable LED board.

Lumen Output: 70 @ 350mA
120 @ 700mA

Lumens Per watt: 70 @ 1 watt
60 @ 2 watts

CRI Warm White (3000k): 85+
Colour Temp: 3,000 or 4,000K

Power Supply

External (Series) Driver

Constant current driver
Output: 3vdc at 700mA maximum

Integral 12 Volt Driver

Buckbullet Driver:
Input: 12vac 3watt at 700mA
Output: 3vdc nominal, 350mA or 700mA

Transformer

Hunza wall Mount Transformer for use with integral 12 volt driver

Retro 110/240 volt Driver

HUNZA Plug and Play Driver
Input: 120/240 vac 7 watt
Output: 6 dc 700mA
0-10 volt dimming
(USA - non dimming)