

# QUADRA ICE

Design by Prolif Diffusion Studio.

**VIBIA**  
LIGHT IS CREATION

## Reference

**1134.**

## Application

Ceiling Lamps

## Installation type

Surface

## Description

Light for ceiling fitting, in optical glass to fit perfectly into the setting as it has no profile.

## Diffuser


Optical-glass diffuser

## Finish



**1134-00.**  
White glass


## Sketch



## Electrical characteristics

1 x R7s 117mm 230V 230W Eco

Total 230.0 W



## Physical characteristics

1 Box / 0.27 x 0.60 x 0.60 m. / Vol. 0.0972 m<sup>3</sup> /  
Gross weight 6.2 kg. / Net weight 4.2 kg.


## Installation and assembly

Please see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 72.05%

Coordinate system : C-G

Total flux : 5000.00 lm

Maximum value : 134.74 cd/klm

Light position : C=0.00 G=0.00


Double symmetrical : 3

Isolux : Isolux (suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

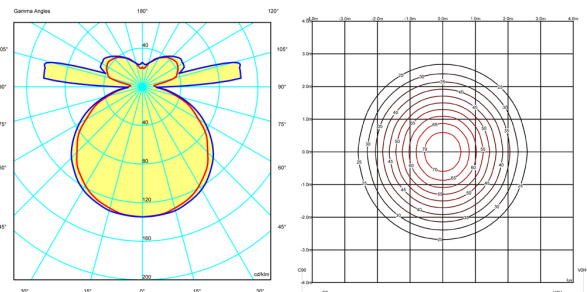

## Certificates

