


## intro


### instructions for use

1. Check mains connection, if disconnected.
2. Conduct mains cable through cable entry point of the wall bracket. Conduct aperture in cable entry point in such a way that density is assured.
3. Attach wall bracket: Pay attention of position "top".  
Use the washer gaskets with rubberized face showing to the wall bracket. At mounting holes which are not used arrange for density.
4. Hustle silicone-tubes over the power lines.
5. Establish protective conductor connection and conduct electrical junction.
6. Hustle light housing onto the wall bracket and assure it with countersunk head screws.

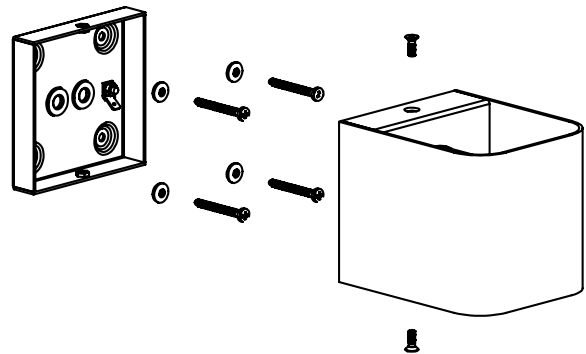

### light technology:

IvyLight-technology  
230V Power LED / 3000K  
7,5 W/610 lm


 EEC

### technical information:

operating voltage 230V / 50Hz

 protection class

 safety class 1

 Luminaire is suitable for mounting on normal inflammable fixing surfaces.

 conformity mark

### maintenance:

Disconnect the electrical installation.

Check gaskets and clean or replace them if necessary.

Pay attention to the care instructions when cleaning the luminaire. Do not use a high pressure cleaner for cleaning.

This luminaire contains built-in LED lamps. The lamps cannot be replaced in the luminaire.

### care:

Regularly clean luminaire from dirt and deposits.

See service documents:

Care of stainless steel rustless or coated surfaces.

### safety:

We point out that the electric connection of light fixtures has to be done by a certified installer.

We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire.

Modifications on the luminaire will result in loss of warranty.

**Attention:** Please note that some parts of this luminaire can produce temperatures higher than 90°C when it is in operation. To prevent burns, please avoid any contact!

**Please keep the instructions with the service documents!**