

INSTALLATION INSTRUCTIONS

SAFETY CONDITIONS

1. Mount the luminaire in accordance with the installation instructions included.
2. After removing the luminaire from the packaging, check that it is complete and that none of its components has been damaged. If damage is found, do not mount the fitting.
3. Switch off the power supply before mounting.
4. Installation should only be carried out by qualified electricians.
5. The fitting and service of the fitting should be carried out in protective gloves.
6. It is forbidden to make any changes to the luminaire without the written permission of the manufacturer.
7. Do not load (electrically and mechanically) the fitting with additional elements.
8. In the event of a lamp failure, it must not be touched or maintained. Switch off the luminaire immediately. The luminaire may not be used again until it has been repaired and checked by a qualified electrician.
9. All maintenance work should be carried out with the power off and the luminaire cool.
10. Use only a soft cloth to clean the luminaire. Do not use chemical substances containing alcohol (risk of damaging the outer surface of the housing and the diffuser).
11. Clean chrome parts with a soft microfiber cloth without cleaning agents (likely to scratch).

Note:


The safety conditions in this manual must be strictly observed. An electric shock can cause injury.

ASSEMBLY INSTRUCTIONS

Huron - general assembly instructions


1. Remove the diffusers from the profiles

Pry up the diffuser with a plastic tool and remove it from the profile

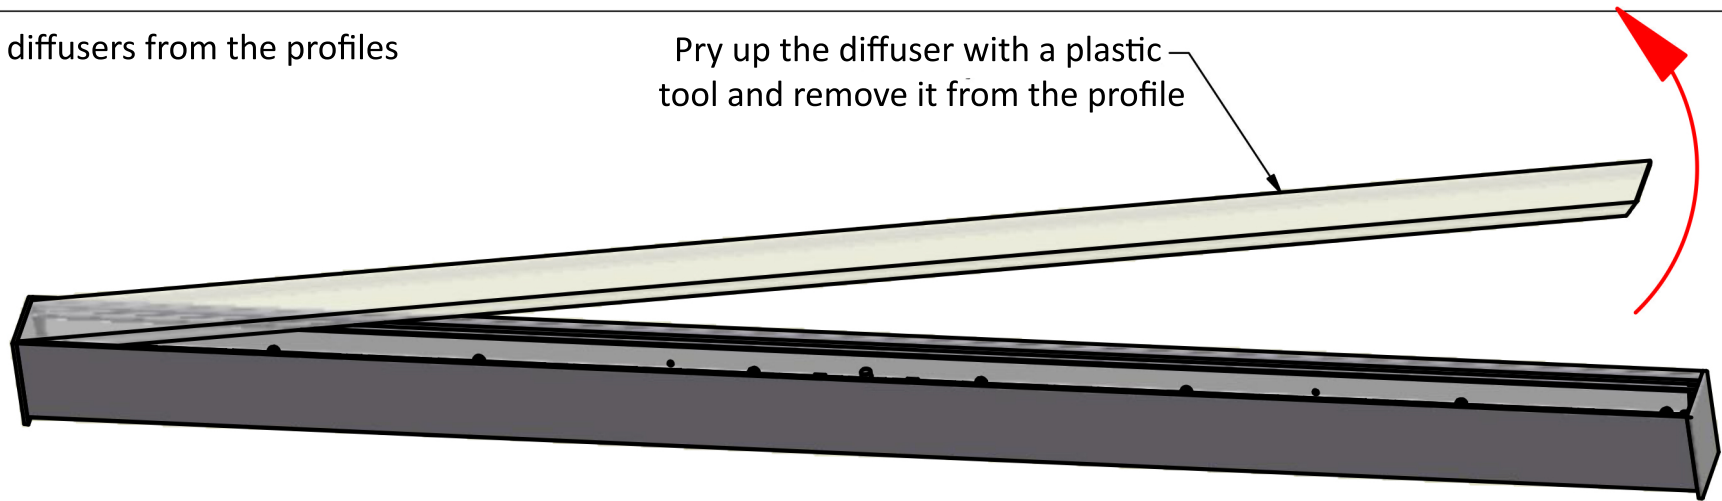


2. Remove the cartridges from the profiles

2A. Insert the key into the holes at the end of the profile

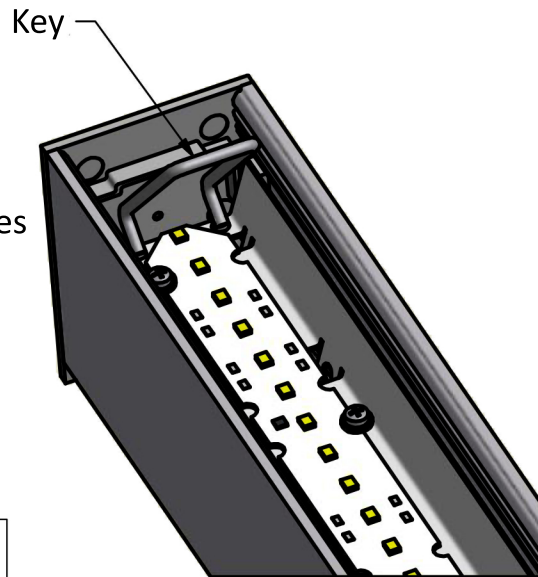

2B. Remove the insert from the profile by pulling the key

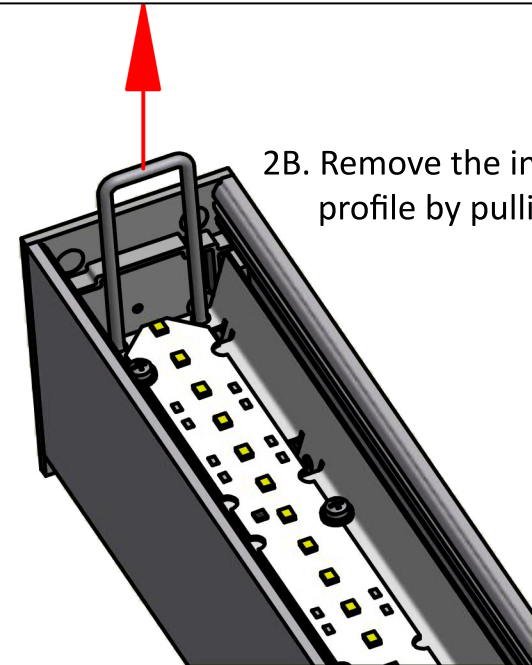


Note:
Installation should only be carried out by qualified electricians.
Installation and service of the luminaire only in protective gloves.
An electric shock can cause injury.

ASSEMBLY INSTRUCTIONS


Huron - general assembly instructions

3. You can remove the insert from the terminal block and remove the protection from the insert to completely remove the insert from the profile.

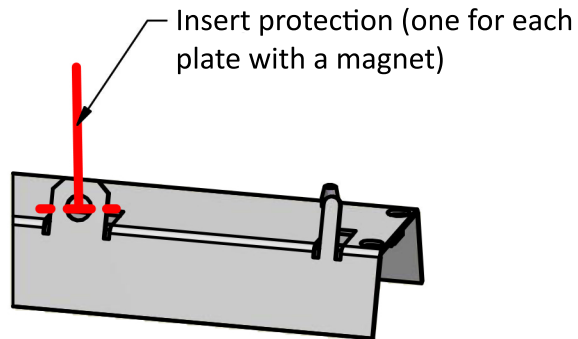


4. Connect the profiles together (if they form a system with several sections).


4A.

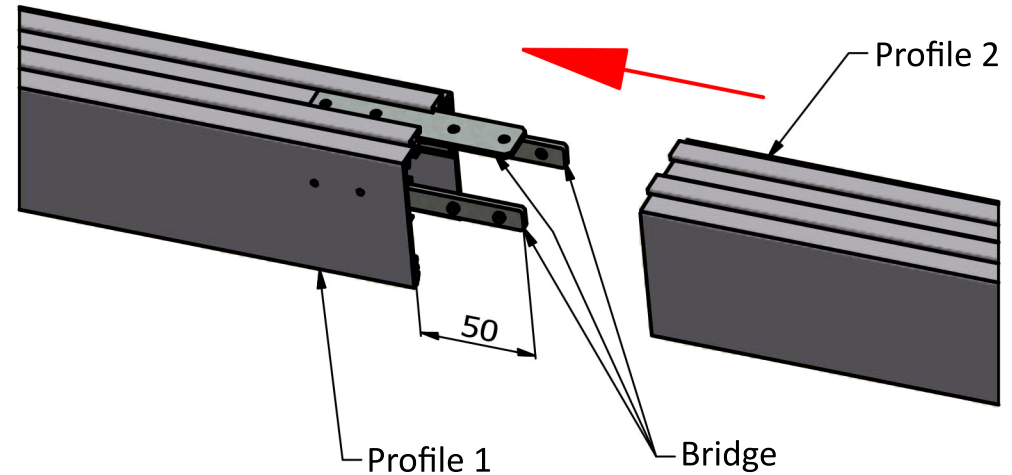

4B.

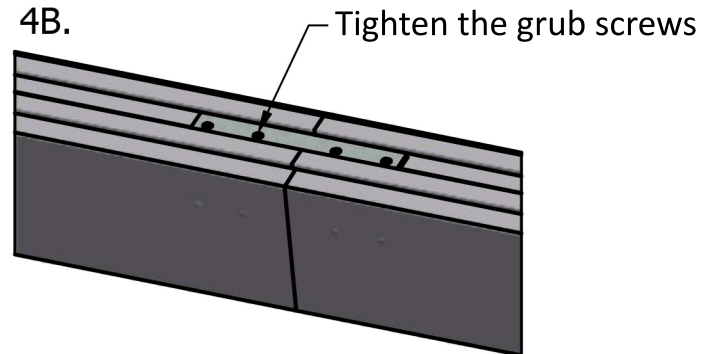

4C. Mask the joining of the profiles from the inside

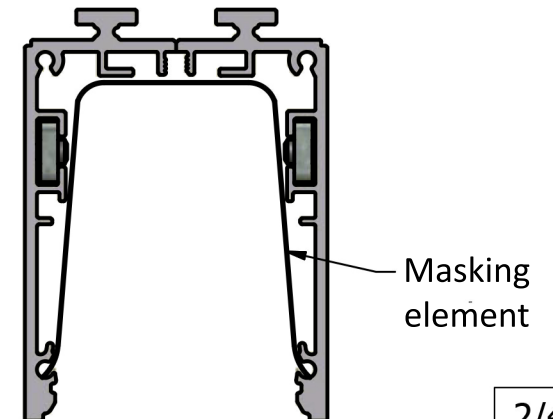


Note:
Installation should only be carried out by qualified electricians.
Installation and service of the luminaire only in protective gloves.
An electric shock can cause injury.


ASSEMBLY INSTRUCTIONS

Huron - general assembly instructions

5. Mark the mounting holes and drill the holes for the mounting pins. The diameter and type of the dowel should be adapted to the type of surface. Maximum diameter of the mounting screw 6mm.

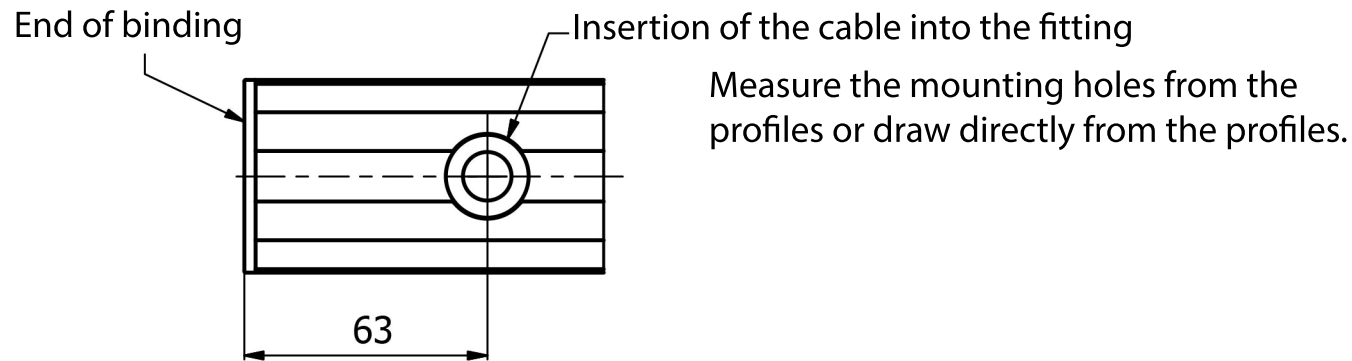

6. Insert the lead into the fitting and screw it to the ground.

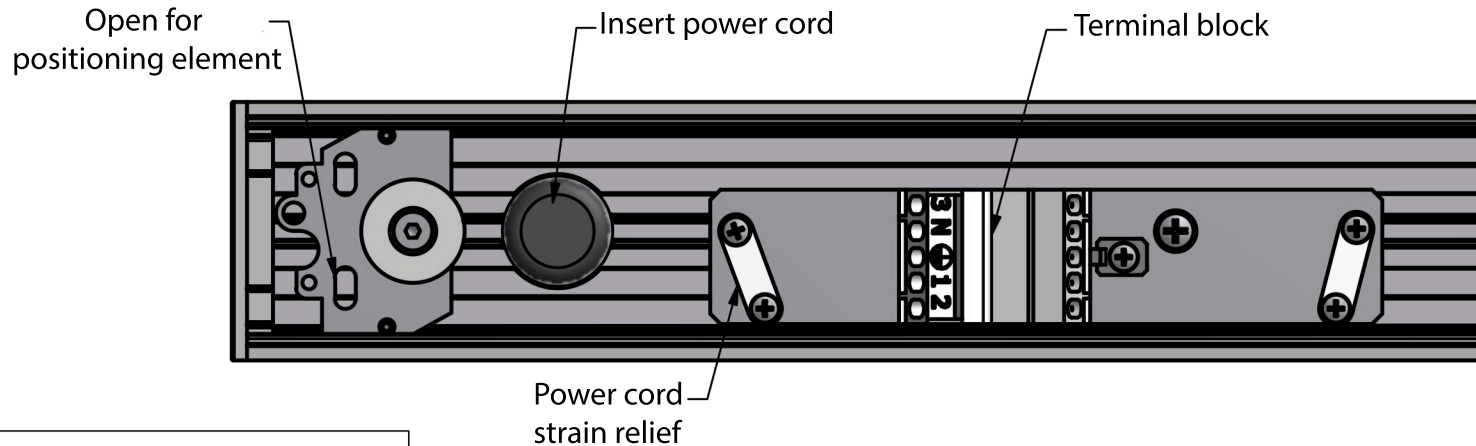


Note:
Installation should only be carried out by qualified electricians. Installation and service of the luminaire only in protective gloves. An electric shock can cause injury.

ASSEMBLY INSTRUCTIONS


Huron - general assembly instructions

7. Electrically connect the profiles (if they form a system with several sections).

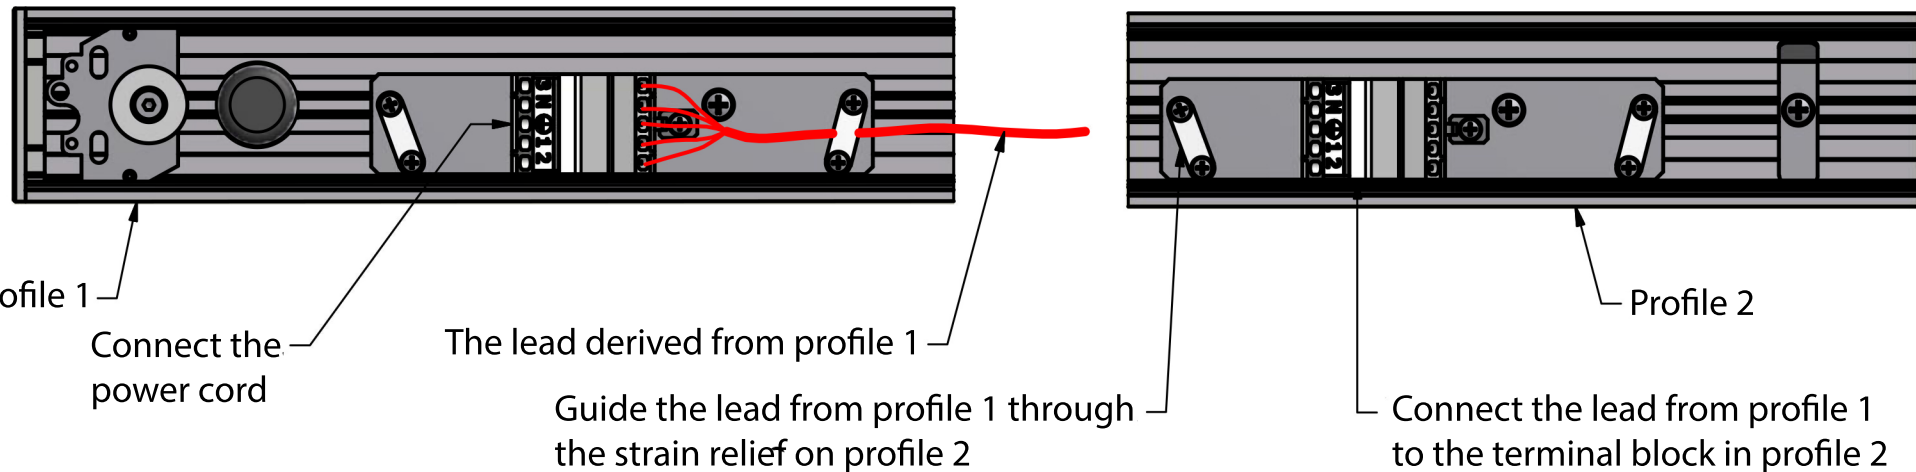

8. If the cartridges have been completely dismantled, attach them to the safety devices again. Connect the supply cord to the closest terminal block. Insert the insert into the profile so that it adheres to the magnets, the element positioning the insert should hit the hole in the magnet plate.

9. Install the diffusers.

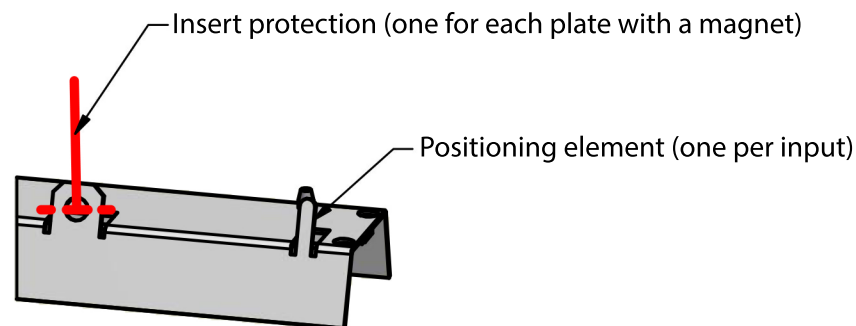

Note:
Installation should only be carried out by qualified electricians.
Installation and service of the luminaire only in protective gloves.
An electric shock can cause injury.