

# TECHNICAL DATA SHEET

## BEAMMEUP ROUND 111 LED 1300LM CRI 80 REMOTE DRIVER

REF N° 279 29 040 Adj. 2700K  
REF N° 279 29 140 Adj. 3000K  
REF N° 279 29 142 Adj. Vibrant V830

Xicato LED - 11,7W - 1300 lm @ 70°C  
□ - ⚡ - excl LED driver - 36° ▽ - IP20  
Requires remote LED driver - 700 mA  
⏏ - ⚡ - CE - 850°C - 2 SDCM  
Surface mounted

## BEAMMEUP ROUND 111 LED 1300LM CRI 97 REMOTE DRIVER

REF N° 279 29 940 Adj. 2700K  
REF N° 279 29 840 Adj. 3000K  
REF N° 279 29 842 Adj. Vibrant V930

Xicato LED - 17,6W - 1300 lm @ 70°C  
□ - ⚡ - excl LED driver - 36° ▽ - IP20  
Requires remote LED driver - 700 mA  
⏏ - ⚡ - CE - 850°C - 2 SDCM  
Surface mounted

## REMOTE LED DRIVER ON/OFF

REF N° 697 00 025 25W

230V/50Hz - □ - current controlled  
▽ - CE - IP20 - 700mA - not dimmable

## REMOTE LED DRIVER DIM

REF N° 697 60 025 25W 1-10V DALI PUSH  
REF N° 697 60 040 40W 1-10V DALI PUSH  
REF N° 697 70 017 17W PHASE DIM

230V/50Hz - □ - current controlled  
▽ - CE - IP20 - 700mA - dimmable

## BEAMMEUP ROUND 111 AR


REF N° 279 13 100 Adj. ⚡

 QR-LP 111 - 35-50-75-100W  
G53 - 12V - ⚡ - excl. transfo  
⏏ - ⏏ - ⚡ - CE - ⚡ - IP20 - 850°C  
Surface mounted

## BEAMMEUP ROUND 111 CDM

REF N° 279 19 070 Adj. ⚡ CDM-TC - G8.5  
REF N° 279 12 070 Adj. ⚡ CDM-R - GX8.5

35W or 70W - 230V/50Hz - ⚡ - excl. EVG  
▽ - ⏏ - ⚡ - CE - ⚡ - IP20 - 850°C  
Surface mounted

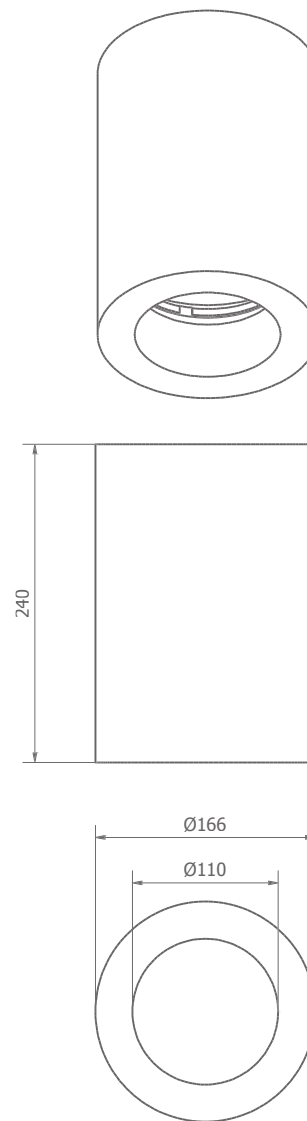

Surface Mounted

**OPTIONAL INSTALLATION KIT**

REF N° 201 00 060 Frosted diffuser for 111 LED series