


Avia7/ Ease7/Grace7 Mobile


Feb 2018




Aqua Creations
Light that matters



Avia7



Ease7




Grace7

Silk Lighting Maintenance: All Lampshades in the Silk Lighting Collections are made of hand dyed, treated crushed silk that is resistant to mold and fire. The silk is sculpted over a metal structure. For optimal maintenance, vacuum the silk frequently and avoid direct sunlight or smoke. To remove stains use upholstery foam cleaner. (As these vary depending on manufacturer, testing the product on a hidden spot is recommended)


1

1. Insert the electrical wire from the J box through the hanger top hole (g)
2. Fix the hanger to the ceiling using 10x58mm screws (b) (supplied).
3. Connect the electricity wire to the power wire running it through the hole (f). Lift the cover plate (d), and lock it to its position with the 2 screw.

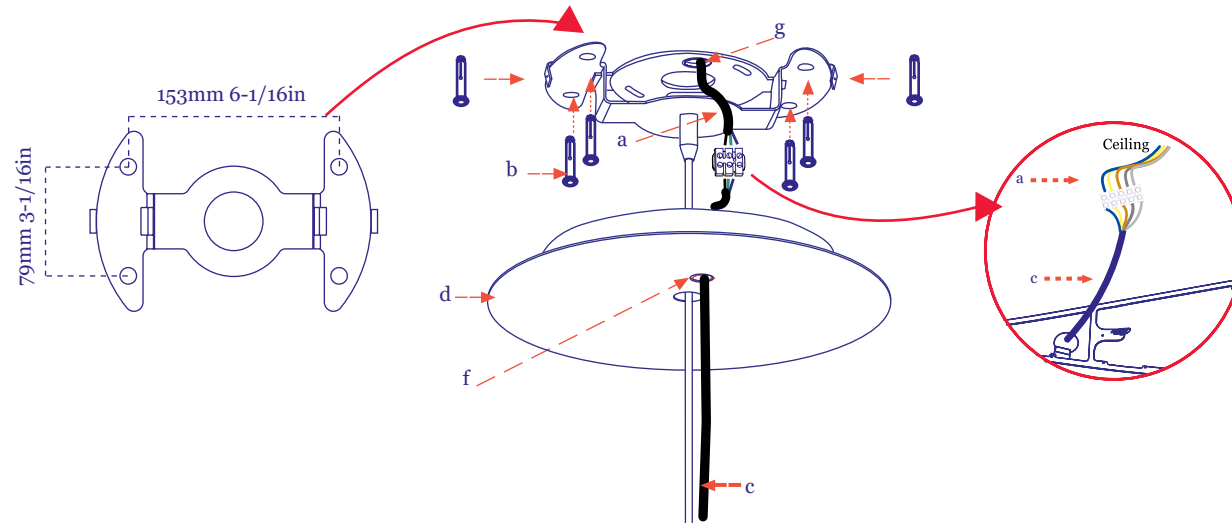


2

2. If not already attached, attach the "Screwed eye end" to the lower edge of the wire in order to obtain desired cable length.

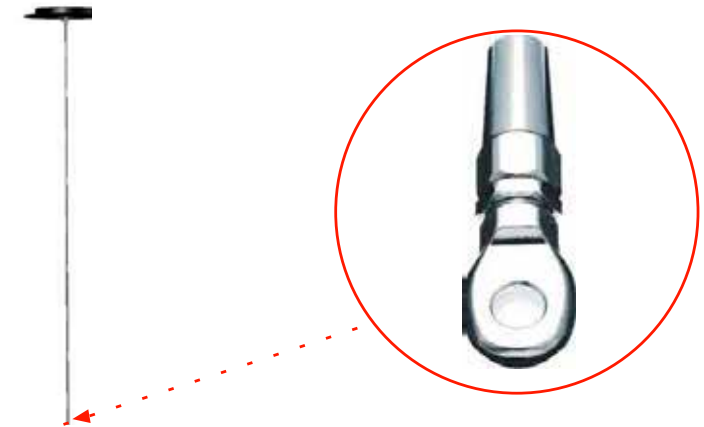

Avia7/ Ease7/Grace7 Mobile




Aqua Creations
Light that matters

3

Extend mobile fixture on soft material as shown.

TOP CONNECTOR

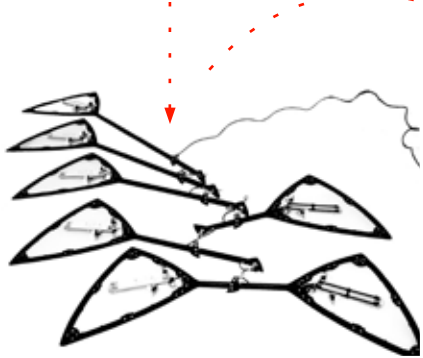

Important: Keep all disassembled parts during hanging. they will be used at the end of process to connect main cable to mobile.

Open hex screw located on the top connector (as shown in the photos)

Important: open only the top connector. do not open other hex screws.

A




B



4

Hang the main construction to the "Screwed eye end".

CEILING

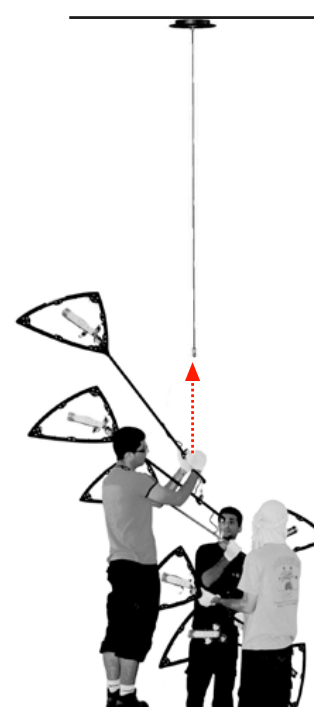

A




B



C









Aqua Creations
Light that matters

5

Fix bulbs in the sockets.

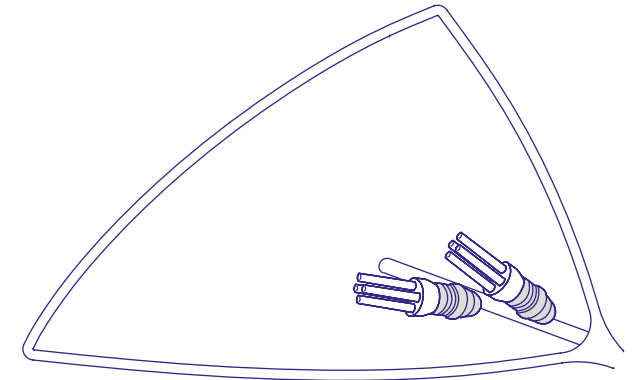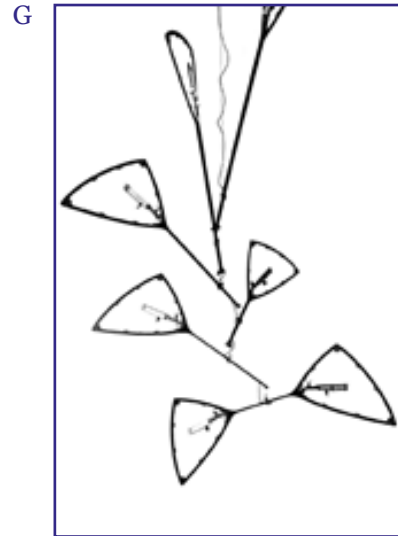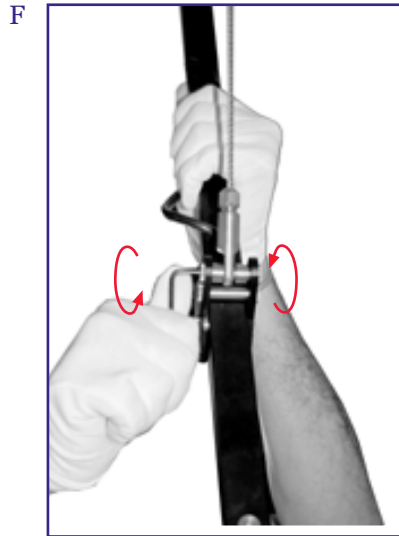



Aqua Creations
Light that matters


6

Attach silk covers to the mobile's frame.



7

A. Use a wrench no' 13 to change the fixture composition.

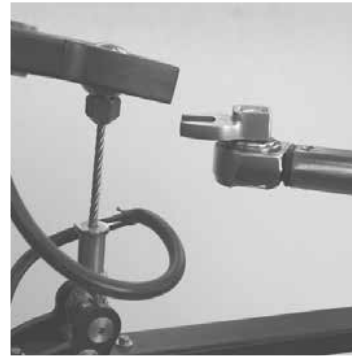


B. Turn the wrench carefully to fix the desired position. (example in steps b-c)




C.



D. Repeat steps a-c on all profiles as desired.

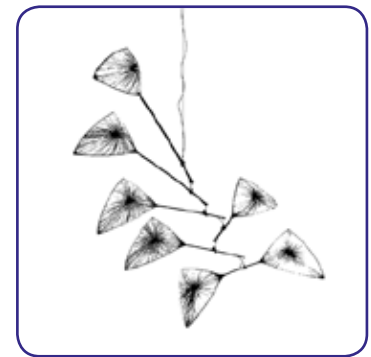

Avia7/ Ease7/Grace7 Mobile



Aqua Creations
Light that matters

Avia 7

220-240 V Model

E27 Socket.
14x 12W-15W LED bulbs.
Type A dimming (Triac)
CE Certified


120 V Model

120 V Model
E26 Socket.
25x 12W-15W LED bulbs.
Type A dimming (Triac)
UL Listed

Package

Volume: 260 x 25 x 65cm, 102 x 10 x 26 in

Dimensions

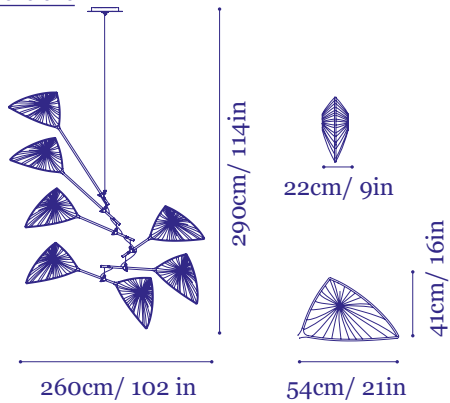

Ease 7

220-240 V Model


E27 Socket.
14x 12W-15W LED bulbs.
Type A dimming (Triac)
CE Certified

120 V Model

E26 Socket.
25x 12W-15W LED bulbs.
Type A dimming (Triac)
UL Listed

Package

Dimensions

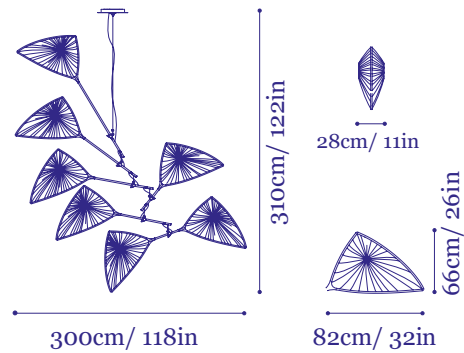

Grace 7

220-240 V Model

E27 Socket.
14x 12W-15W LED bulbs.
Type A dimming (Triac)
CE Certified

120 V Model

E26 Socket.
25x 12W-15W LED bulbs.
Type A dimming (Triac)
UL Listed

Package

Dimensions

