
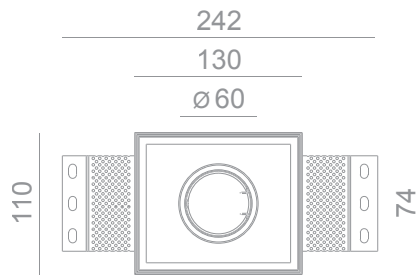




TECHNICAL DATA SHEET



Included: installation system for gypsum ceiling 9 - 12 - 15 mm

OPTIONAL INSTALLATION KIT

- REF N° 261 99 025 installation system for gypsum ceiling 25 mm
- REF N° 261 99 030 installation system for gypsum ceiling 30 mm
- REF N° 200 50 000 clip on lampholder ring, without diffuser
- REF N° 200 50 001 clip on lampholder ring - with frosted diffuser
- REF N° 827 00 000 Concrete box Pixo 50 - Galvanized steel



PIXO 50 LOW LED 700LM CRI 80

- REF N° 263 72 040 Fix phase DIM 2700K
- REF N° 263 72 140 Fix phase DIM 3000K
- REF N° 263 72 142 Fix phase DIM Vibrant V830
- REF N° 263 72 240 Fix phase DIM 4000K
- REF N° 263 62 040 Fix DIM 1-10V 2700K
- REF N° 263 62 140 Fix DIM 1-10V 3000K
- REF N° 263 62 142 Fix DIM 1-10V Vibrant V830
- REF N° 263 62 240 Fix DIM 1-10V 4000K

Xicato LED - 8,3 W - 720lm @ 70°C
 - 230V/50Hz - incl LED driver - IP20
 36° - - - - 850°C - 2 SDCM
 h=103 - 114x134 mm

PIXO 50 LOW LED 500LM CRI 97

- REF N° 263 72 940 Fix phase DIM 2700K
- REF N° 263 72 840 Fix phase DIM 3000K
- REF N° 263 72 842 Fix phase DIM Vibrant V930
- REF N° 263 72 740 Fix phase DIM 4000K
- REF N° 263 62 940 Fix DIM 1-10V 2700K
- REF N° 263 62 840 Fix DIM 1-10V 3000K
- REF N° 263 62 842 Fix DIM 1-10V Vibrant V930
- REF N° 263 62 740 Fix DIM 1-10V 4000K

Xicato LED - 8,5 W - 500lm @ 70°C
 - 230V/50Hz - inclusive LED driver
 36° - - - - 850°C - 2 SDCM
 h=103 - 114x134 mm

PIXO 50 LOW HAL

REF N° 263 10 050 Fix. IP20

QR-CBC 51 - 50W - Gx5.3 - 12V -
 excl lamp and transfo - - - 850°C
 Outdoor: Waterproof Calcyt+®
 - h=75 - 114x134 mm

PIXO 50 LOW ES

REF N° 263 11 050 Fix. IP20

QPAR 16 - 50W - GZ10/GU10 -
 230V/50Hz - excl. lamp - - - 850°C
 Outdoor: Waterproof Calcyt+®
 - h=78 - 114x134 mm