
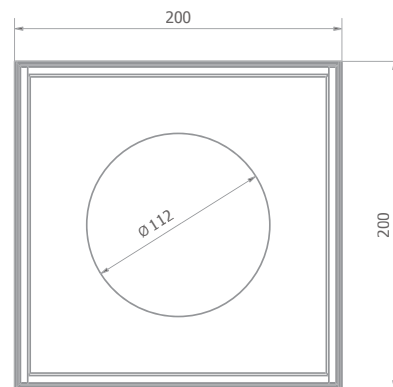


TECHNICAL DATA SHEET

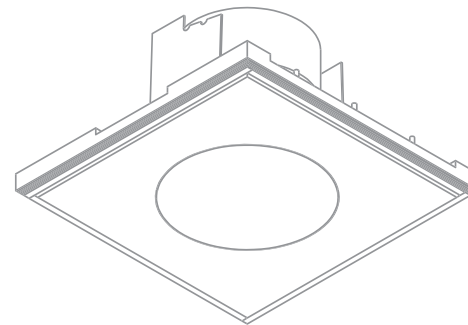

ZERODIX 111 LED 1300LM CRI 97

- REF N° 266 23 960 Fix on/off 2700K
- REF N° 266 23 860 Fix on/off 3000K
- REF N° 266 23 862 Fix on/off Vibrant V930
- REF N° 266 63 960 Fix DIM 1-10V 2700K
- REF N° 266 63 860 Fix DIM 1-10V 3000K
- REF N° 266 63 862 Fix DIM 1-10V Vibrant V930
- REF N° 266 33 960 Fix DIM DALI 2700K
- REF N° 266 33 860 Fix DIM DALI 3000K
- REF N° 266 33 862 Fix DIM DALI Vibrant V930

Xicato LED - 17,6W - 1300 lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - 60°
 ▽ - IP20 Ⓛ0.5m - ⚡ CE - 850°C - 2 SDCM
 h=115 - 204x204 mm

ZERODIX 111 LED 1300LM CRI 80


- REF N° 266 23 060 Fix on/off 2700K
- REF N° 266 23 160 Fix on/off 3000K
- REF N° 266 23 162 Fix on/off Vibrant V830
- REF N° 266 63 060 Fix DIM 1-10V 2700K
- REF N° 266 63 160 Fix DIM 1-10V 3000K
- REF N° 266 63 162 Fix DIM 1-10V Vibrant V830
- REF N° 266 33 060 Fix DIM DALI 2700K
- REF N° 266 33 160 Fix DIM DALI 3000K
- REF N° 266 33 162 Fix DIM DALI Vibrant V830

Xicato LED - 11,7W - 1300 lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - 60°
 ▽ - IP20 Ⓛ0.5m - ⚡ CE - 850°C - 2 SDCM
 h=115 - 204x204 mm

ZERODIX 111 LED 2000LM CRI 80

- REF N° 266 25 060 Fix on/off 2700K
- REF N° 266 25 160 Fix on/off 3000K
- REF N° 266 25 162 Fix on/off Vibrant V830
- REF N° 266 65 060 Fix DIM 1-10V 2700K
- REF N° 266 65 160 Fix DIM 1-10V 3000K
- REF N° 266 65 162 Fix DIM 1-10V Vibrant V830
- REF N° 266 35 060 Fix DIM DALI 2700K
- REF N° 266 35 160 Fix DIM DALI 3000K
- REF N° 266 35 162 Fix DIM DALI Vibrant V830

Xicato LED - 19,5W - 2000 lm @ 70°C
 □ - 230V/50Hz ⚡ - incl LED driver - 60°
 ▽ - IP20 Ⓛ0.5m - ⚡ CE - 850°C - 2 SDCM
 h=115 - 204x204 mm

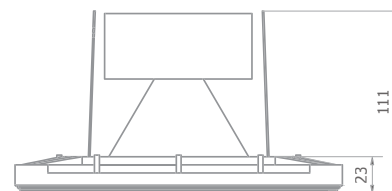

Included: installation system for gypsum ceiling 9 - 12 - 15 mm

OPTIONAL INSTALLATION KIT

- REF N° 266 99 025 installation system for gypsum ceiling 25 mm
- REF N° 266 99 030 installation system for gypsum ceiling 30 mm