

LINK

Design by Ramón Esteve.

VIBIA
LIGHT IS CREATION

Reference

5384.

Application

Ceiling Lamps

Installation type

Surface

Description

Geometry as decor... The Link is a series of preconfigured geometric patterns that can be arranged across the canvas of a ceiling. These configurations have shallow profiles making them ideal for residential and hospitality settings or anywhere with low ceilings. The combinations of different rectangular shapes create surface fixtures of different sizes, with up to five combined cubist forms.

Diffuser

Methacrylate diffuser


Finish



5384-03.
Shiny white
lacquer

5384-18.
Shiny graphite
lacquer

Sketch

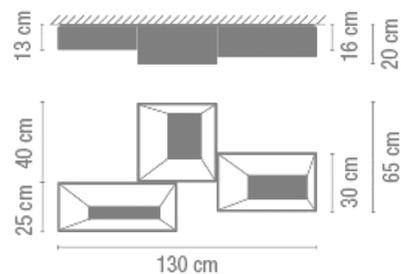

Electrical characteristics


8 x 2G11 230V 24W

AND

4 x 2G11 230V 18W



Total 264.0 W



Physical characteristics

1 Box / 0.50 x 0.77 x 0.77 m. / Vol. 0.2964 m³ /
Gross weight 19.3 kg. / Net weight 17.4 kg.

Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 19.75%

Coordinate system : CG

Total flux : 19200.00 lm

Maximum value : 62.59 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

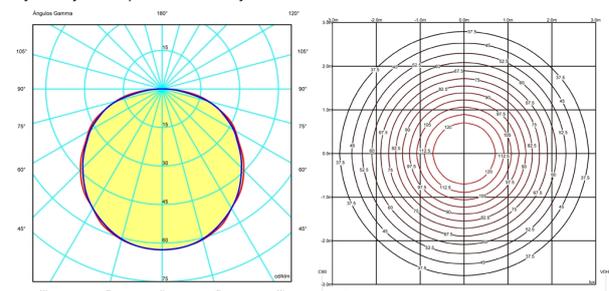

Certificates

