

TECHNICAL DATA SHEET

PICA 8 FLUO

REF N° 125 23 006

T2-6W - GX53 - 230V/50Hz -
 incl EVG - - - - - IP44
 850°C - -

PICA 8 LED DIM 100 LM

REF N° 125 60 500 CRI 80 warm white 2200°K
 REF N° 125 60 000 CRI 90 warm white 2700°K
 REF N° 125 60 100 CRI 90 warm white 3000°K
 REF N° 125 60 300 royal blue

- 1W - excl. LED driver - current
 controlled 350 mA - - -
 - IP40 - - - serial wiring
 3 SDCM - 3 Step MacAdam
 Requires remote LED driver
 current controlled 350 mA

PICA 8 LED DIM 400 LM

REF N° 125 61 000 CRI 80 warm white 2700°K
 REF N° 125 61 100 CRI 80 warm white 3000°K
 REF N° 125 61 200 CRI 80 neutral white 4000°K

- 4W - excl. LED driver - current
 controlled 350 mA - - -
 - IP40 - - - serial wiring
 2 SDCM - 2 Step MacAdam
 Requires remote LED driver
 current controlled 350 mA

REMOTE LED DRIVER ON/OFF


REF N° 697 00 006 8W
 REF N° 697 00 015 15W
 REF N° 697 00 025 25W

230V/50Hz - - current controlled
 - - IP20 - 350mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V
 REF N° 697 60 015 15W 1-10V
 REF N° 697 30 015 15W DALI
 REF N° 697 60 025 25W 1-10V DALI PUSH
 REF N° 697 60 040 40W 1-10V DALI PUSH
 REF N° 697 70 009 9W PHASE DIM (tr. edge)
 REF N° 697 70 017 17W PHASE DIM

230V/50Hz - - current controlled
 - - IP20 - 350mA - dimmable

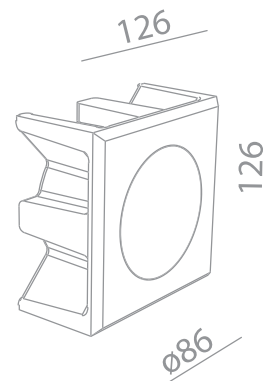

Ready for installation in solid walls
 Optional plasterkit for installation into gypsum walls

PLASTERKIT PICA 8

REF N° 725 01 000 For mounting into gypsum walls
 132x132 mm. Housing: perforated aluminium

