

TECHNICAL DATA SHEET

SMALL LED ON/OFF 600LM 230VAC

REF N° 106 21 500 IP20 CRI 80 2200°K

REF N° 106 21 000 IP20 CRI 90 2700°K

REF N° 106 21 100 IP20 CRI 90 3000°K

230V/50Hz - 6,5W - incl. line voltage LEDdriver
600lm@85°C - 700lm@25°C - **E** - **CE** - IP20
parallel wiring ∇ - Q -0.2m - 850°C P \square
Connects directly to 230 VAC
2 SDCM - 2 Step MacAdam

SMALL LED DIM 600LM REMOTE DRIVER

REF N° 106 29 500 IP20 CRI 80 2200°K

REF N° 106 29 000 IP20 CRI 90 2700°K

REF N° 106 29 100 IP20 CRI 90 3000°K

6,5W - excl. LEDdriver
600lm@85°C - 700lm@25°C - **E** - **CE** - IP20
serial wiring ∇ - Q -0.2m - 850°C P \square
Requires remote LED driver DIM
2 SDCM - 2 Step MacAdam

SMALL LED ON/OFF 350LM 230VAC

REF N° 106 21 001 IP54 BATHROOM CRI 80 2700°K

REF N° 106 21 101 IP54 BATHROOM CRI 80 3000°K

REF N° 106 21 201 IP54 BATHROOM CRI 80 4000°K

REF N° 106 21 005 IP54 OUTDOOR CRI 80 2700°K

REF N° 106 21 105 IP54 OUTDOOR CRI 80 3000°K

REF N° 106 21 205 IP54 OUTDOOR CRI 80 4000°K

230V/50Hz - 4W - incl. line voltage LEDdriver
350lm@85°C - 400lm@25°C - **E** - **CE** - IP20
parallel wiring ∇ - Q -0.2m - 850°C P \square
Connects directly to 230 VAC
2 SDCM - 2 Step MacAdam
Outdoor: Waterproof Calcyt+®

SMALL LED DIM 350LM REMOTE DRIVER

REF N° 106 29 001 IP54 BATHROOM CRI 80 2700°K

REF N° 106 29 101 IP54 BATHROOM CRI 80 3000°K

REF N° 106 29 201 IP54 BATHROOM CRI 80 4000°K

REF N° 106 29 005 IP54 OUTDOOR CRI 80 2700°K

REF N° 106 29 105 IP54 OUTDOOR CRI 80 3000°K

REF N° 106 29 205 IP54 OUTDOOR CRI 80 4000°K

4W - excl. LEDdriver
350lm@85°C - 400lm@25°C - **E** - **CE** - IP20
serial wiring ∇ - Q -0.2m - 850°C P \square
Requires remote LED driver DIM
2 SDCM - 2 Step MacAdam
Outdoor: Waterproof Calcyt+®

SMALL HAL


REF N° 106 01 040

Q QT14 - max 40W - G9
230V/50Hz \triangleleft - ∇ - Q -0.5m - **E** - **CE**
IP20 - 850°C dimmable - P

REMOTE LED DRIVER DIM

REF N° 697 60 040 DIM 1-10V DALI PUSH 30W

230V/50Hz - \square - current controlled
 ∇ - **CE** - IP20 - 250mA/350mA

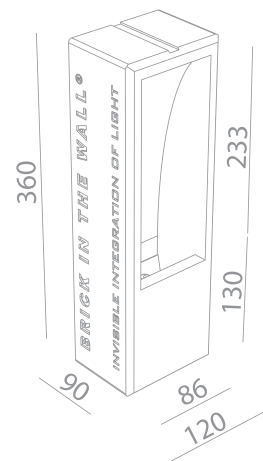

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT SMALL

REF N° 706 01 000 For mounting into gypsum walls
 P 124x365 mm. Housing: perforated aluminium

