


# TERA 7

design: Roberto Mantovani



## Supply current

Alimentazione  
Courant d'alimentation  
Stromversorgung  
Corriente de alimentación

350 mA ( $V_f$  20,3V)


## Power

Potenza  
Puissance  
Bestuekung  
Potencia


7 W

## Series wiring

Cablaggio in serie  
Câblage en série  
Verkabelung in Serie  
Cableado en serie



## Photometric diagrams

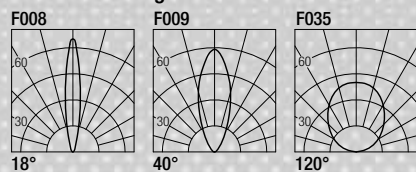

## CCT/CRI/Flux

|       |        |
|-------|--------|
| 2700K | 623 lm |
| 3000K | 651 lm |
| 4200K | 721 lm |
| 6000K | 798 lm |



## Code Construction

Costruzione del codice - Construction du code produit  
Bau der Produkt-Code - Construcción del código de producto

## XT3 X X X X

### Finishing

Finitura  
Finitions  
Oberflächenfinish  
Acabados

| G                              | N                                         | K       | Z                                                             |
|--------------------------------|-------------------------------------------|---------|---------------------------------------------------------------|
| Grey<br>Grigio<br>Gris<br>Grau | Black<br>Nero<br>Noir<br>Schwarz<br>Negro | COR-TEN | INOX AISI 316L<br>Steel<br>Acciaio<br>Acier<br>Stahl<br>Acero |

### Color Temperature

Temperatura colore  
Température couleur  
Temperaturabhängige Farbe  
Temperatura de color

| 0     | 1     | 2     | 3     | 6                                   | 7                              | 8                                    |
|-------|-------|-------|-------|-------------------------------------|--------------------------------|--------------------------------------|
| 2700K | 3000K | 4200K | 6000K | Blue<br>Blu<br>Bleu<br>Blau<br>Azul | Green<br>Verde<br>Vert<br>Grün | Red<br>Rosso<br>Rouge<br>Rot<br>Rojo |

### Beam angle

Apertura di fascio  
Angle de faisceau  
Strahlwinkel  
Ángulo del haz

| 1   | 2   | 9    |
|-----|-----|------|
| 18° | 40° | 120° |

### Shape

| 1                                           | 2                                                |
|---------------------------------------------|--------------------------------------------------|
| Round<br>Tondo<br>Ronde<br>Runde<br>Redondo | Square<br>Quadro<br>Carré<br>Quadrat<br>Cuadrado |


## Optionals

Accessori - Accessoires  
Zubehör - Accesorios

### CSXJ01

#### Recessing box

Controcassa  
Boîtier d'encastrement  
Eingießgehäuse  
Caja de empotrar



### L002

#### Low luminance louvre

Filtro antiabbagliamento  
Filtre basse luminance  
Geringe Leuchtdichte-Filter  
Filtro de baja luminancia



**Nota:** il filtro deve essere ordinato congiuntamente all'apparecchio - **Note:** the filter must be ordered together with the lighting fixture - **Note:** le filtre doit être commandé en même temps que l'appareil - **Anmerkung:** muss der Filter zusammen mit Leuchtkörper bestellt werden  
**Nota:** el filtro debe pedirse junto con la luminaria

## Drivers

Alimentatori - Alimentateurs  
Netzteile - Alimentadores

| on/off                          | dimmable                            |
|---------------------------------|-------------------------------------|
| 350 mA                          |                                     |
| AL1034 (1)<br>30mm IP20         | AL4000 (1)<br>72mm IP20 PUSH 1..10V |
| AL1035 (1)<br>40mm IP20         | AL4051 (1)<br>72mm IP20 DALI        |
| AL1037 (1..2)<br>55mm IP20 S.P. | AL4053 (1)<br>60mm IP20 IGBT-TRIAC  |
| AL9011 (1)<br>60mm IP67         |                                     |