

# Bouly 4

350mA - **required driver see below**


1 x 4 LED array 0,96W (LED incl.) - 350mA - 456lm - 2700K - CRI >93

\*FALSE ceiling= aperture: Ø67 - depth: min. 70mm (driver in ceiling) / depth: min. 60mm (driver remote)


\*CONCRETE ceiling= aperture: Ø67 - depth: min. 100mm (driver remote)

material: transparant glass

\* Required free air area, see [www.trizo21.com/requiredarea](http://www.trizo21.com/requiredarea) - CEILING - IP50

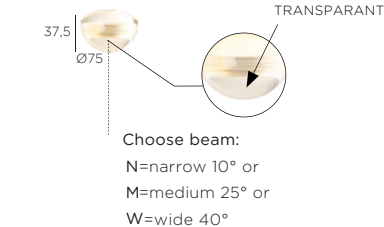


## FALSE ceiling



FALSE ceiling | silver LED HOLDER | BOWW 6010

## ACCESSORY FOR CEILING: PLASTER KIT



aperture: Ø122 | PLBO 2000

## CONCRETE ceiling



CONCRETE ceiling | silver LED HOLDER | BOWW 6012

## REQUIRED DRIVER

| DEVICE | DIM.                           | DRIVER        | VOLT      |
|--------|--------------------------------|---------------|-----------|
| 1 x    | NO (non-dimmable)              | N 5W          | 230V      |
| 1 x    | TRIAC/IGBT                     | D 3WT         | 110V-230V |
| 1 x    | PUSH-DIM + 1-10 (1-10V)        | D 6WP         | 230V      |
| 1-3x   | PUSH-DIM + 1-10 (1-10V)        | D 15WP        | 230V      |
| 1-3x   | PUSH-DIM + DALI                | D 15WDA EU    | 110V-230V |
| 1-3x   | DALI                           | D 15WDA EU-US | 110V-230V |
| 2-8x   | PUSH-DIM + DALI + 1-10 (1-10V) | D 40WDP       | 110V-230V |

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21<sup>®</sup> supplied LED drivers as mentioned. For all specs and techs about drivers, see [www.trizo21.com/drivers](http://www.trizo21.com/drivers)