




Bouly W/C

350mA - **required driver see below**
1 x 4 LED 0,96W(LED incl.) - 350mA - 456lm - 2700K - CRI >93
depth: min. 75mm (driver in ceiling/wall)
materials: aluminium & PMMA
WALL & CEILING - IP50

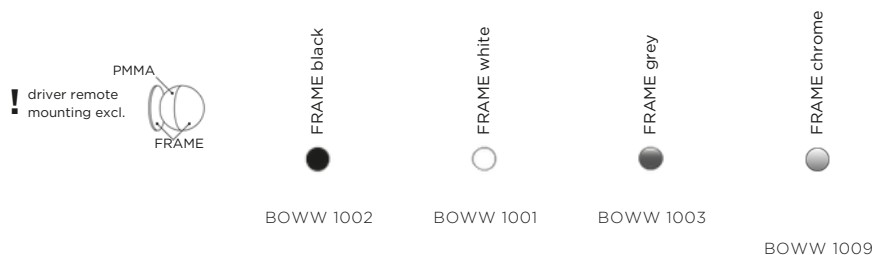


REQUIRED DRIVER

DEVICE	DIM.	DRIVER	VOLT
1 x	NO (non-dimmable)	N 5W	230V
1 x	LC (TRIAC/IGBT)	D 3WT	110V-230V
1 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 6WP	230V
1-3 x	PU (PUSH-DIM) + 1-10 (1-10V)	D 15WP	110V-230V
1-3 x	PU (PUSH-DIM) + DA (DALI)	D 15WDAEU	230V
1-3 x	DA (DALI)	D 15WDAEU-US	110V-230V
2-8 x	PU (PUSH-DIM) + DA (DALI) + 1-10 (1-10V)	D 40WDP	110V-230V

driver remote: does not fit through cutout hole of fixture

For warranty use only Trizo21[®] supplied LED drivers as mentioned. For all specs and techs about drivers, see www.trizo21.com/drivers



Bouly W/C D+B

230V - driver included in base - LC (TRIAC/IGBT) dimmable
1 x 4 LED 0,96W(LED incl.) - 350mA - 456lm - 2700K - CRI >93
depth: min. 75mm (driver in ceiling/wall)
materials: aluminium & PMMA
WALL & CEILING - IP50

