

Galileo Mini LED (dimmable)

Emanuele Ricci, 2013


Suspension with diffuser made of crystal very accurately shaped, working as an optical lens.

Metal parts are made of die-cast aluminium.

The lighting source is a 8W-LED.

Maximum consumption of the lamp 11W.

The decentralizing kit is always included.



TECHNICAL DATAS


Product Name (code)	Galileo Mini LED (383LD)
Certificates	CE
Norms	EN 60-598-1 (CEI 34-21)
Light sources	1 x 8W-LED [3000K • 780lm]
Available	230V (Europe) - 120V (USA - Japan) - 240V (UK) <i>(fittings come with appropriate feeder)</i>
Insulation Class	I
Protection Class	IP20
Packaging	0,026m³ - 2,3Kg

COLOURS




Brushed
Nickel


FAMILY




Galileo



Galileo LED



Galileo Mini



Galileo Mini LED

Galileo Mini LED (on/off)

Emanuele Ricci, 2013


Suspension with diffuser made of crystal very accurately shaped, working as an optical lens.

Metal parts are made of die-cast aluminium.

The lighting source is a 8W-LED.

Maximum consumption of the lamp 11W.

The decentralizing kit is always included.



TECHNICAL DATAS


Product Name (code)	Galileo Mini LED (383L)
Certificates	CE
Norms	EN 60-598-1 (CEI 34-21)
Light sources	1 x 8W-LED [3000K • 780lm]
Available	230V (Europe) - 120V (USA - Japan) - 240V (UK) <i>(fittings come with appropriate feeder)</i>
Insulation Class	I
Protection Class	IP20
Packaging	0,008m³ - 1,6Kg

COLOURS




Brushed
Nickel


FAMILY




Galileo



Galileo LED



Galileo Mini

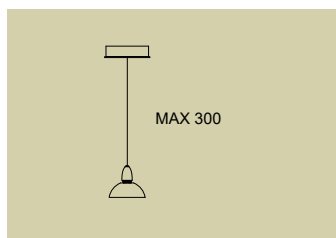


Galileo Mini LED

Galileo Mini T

Emanuele Ricci, 2002

Suspension with diffuser made of crystal very accurately shaped, working as an optical lens.
Metal parts are made of die-cast aluminium.
The decentralizing kit is always included.
Electronic transformer.



TECHNICAL DATAS


Product Name (code)	Galileo Mini T (383)
Certificates	CE
Norms	EN 60-598-1 (CEI 34-21)
Light sources	MAX 50W 12V - GY6.35 (35W energy saver included)
Available	230V (Europe) - 120V (USA - Japan) - 240V (UK) (fittings come with appropriate transformer)
Insulation Class	I
Protection Class	IP20
Packaging	0,008m³ - 1,33Kg

COLOURS




Brushed
Nickel


FAMILY




Galileo



Galileo LED



Galileo Mini



Galileo Mini LED


Galileo Mini LED Modular

Emanuele Ricci, 2013

Galileo Mini LED can be combined in different configurations using dedicated ceiling roses and accessories.

PROFESSIONAL USE ONLY


Contact us for full information and assistance.

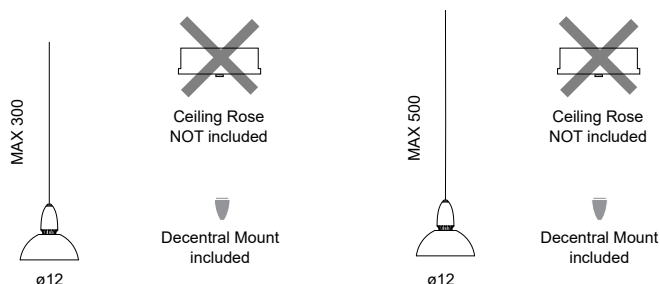


Galileo Mini LED M

Galileo Mini LED ML


CONFIGURATIONS




Galileo Mini LED M/ML




2 x Galileo Mini LED M/ML



2 x Galileo Mini LED M/ML




3 x Galileo Mini LED M/ML




4 x Galileo Mini LED M/ML

CEILING ROSES

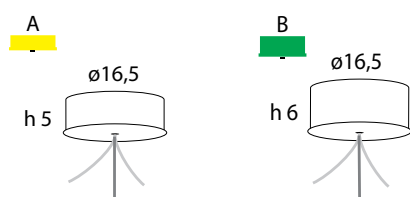

TRACK CONNECTION

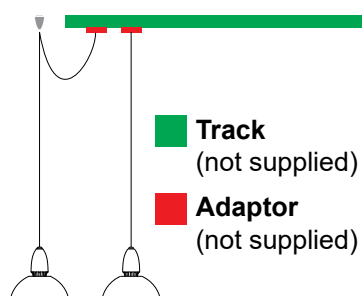

SOFT CEILING

