
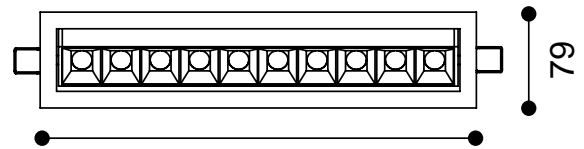


## SURF 10

LED ADJUSTABLE RECESSED DOWNLIGHT  
DLD/7044161-10

**DLD**  
**CONTRACT**



349



### Dimensions

W.349mm D.79mm H.60mm

### Cutout

339mm x 70mm



- High power LED adjustable downlight
- IP20
- Adjustable by 25° tilt

- Bezel finish: white
- Baffle finish: black / white
- Complete with phase dimming driver
- Suitable for 1-10V, TRIAC & DALI dimming

## SURF 10

LED ADJUSTABLE RECESSED DOWNLIGHT  
DLD/7044161-10



### TECHNICAL OVERVIEW

LED Consumption	22W (2.2W x 10)	
Current	700mA	
CCT	2700K	3000K
Lumen *1	-	200lm x 10
Øsystem *3	-	-
Voltage	-	
Reflector	10°/15°/30°	
CRI	80+	
Driver	Remoted, I/P: 90-264V 50/60HZ O/P 9-24V 700mA max. 16w	
Insulation	Class I	
Protection	IP20	
Tilt	± 0~25°	
Rotation	-	
Operating Temperature	-20~40°	
Average Failure Time	L70(6k) >36000 (h)	

### MATERIALS

Luminaire	Steel
Reflector	Optic lens
Baffle	Plastic-ABS
Heat Sink	Extruded aluminium

\*1. LUMEN : for LED chip test results based on Tc=85°C.

This is the ideal (maximum) lumen. This lumen information is from the LED supplier.

\*3. LUMEN (Øsystem) (Total FLUX) : this lumen is from a luminaire with heat sink, reflector and fixture, this is the real lumen value including the loss due to different designs of reflectors and fixtures.

## SURF 10

LED ADJUSTABLE RECESSED DOWNLIGHT  
DLD/7044161-10

**DLD**  
**CONTRACT**

### PRODUCT CODE CONSTRUCTION

SURF 10 LED ADJUSTABLE RECESSED DOWNLIGHT

DLD/7044161-10 / [X] / [X] / [X] / [X] / [X]

LIGHT COLOUR TEMPERATURE (CCT):

[27K] [30K]

2700°K 3000°K

BEAM ANGLE:

[10D] [15D] [30D]

10° 15° 30°

WATTAGE:

[22W]

22W

BAFFLE FINISH:

[BK] [WH]

Black White

BEZEL FINISH:

[WH]

White



01189 889414



enquiries@dld-contract.co.uk



dld-contract.co.uk

DLD Contract Ltd  
Unit 9 Brookside Business Centre  
Church Road  
Swallowfield  
Reading  
Berkshire  
RG7 1TH