
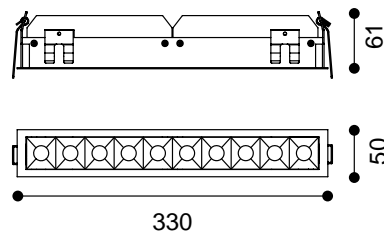


## SURF 10

LED FIXED RECESSED DOWNLIGHT  
DLD/5044161-10

**DLD**  
**CONTRACT**

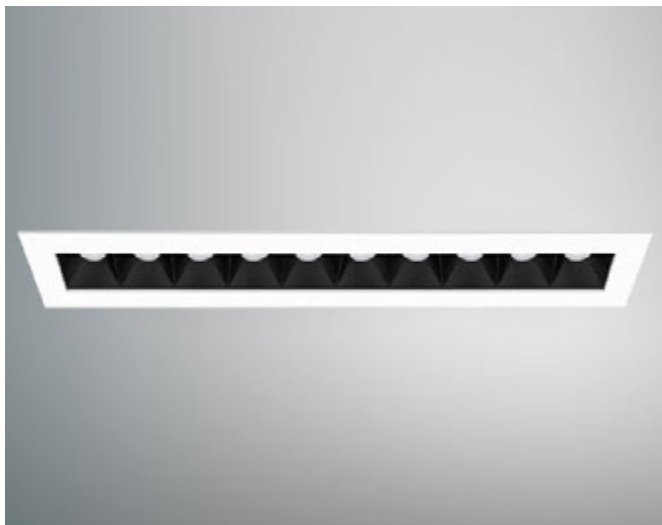

### Dimensions

W.330mm D.50mm H.61mm

### Cutout

324mm x 41mm



- High power LED adjustable downlight
- IP20
- Bezel finish: white

- Baffle finish: black / white
- Complete with phase dimming driver
- Suitable for 1-10V, TRIAC & DALI dimming

## SURF 10

LED FIXED RECESSED DOWNLIGHT  
DLD/5044161-10



### TECHNICAL OVERVIEW

LED Consumption	22W (2.2W x 10)	
Current	700mA	
CCT	2700K	3000K
Lumen *1	-	200lm x 10
Øsystem *3	-	-
Voltage	-	
Reflector	10°/15°/30°	
CRI	80+	
Driver	Remoted, I/P: 90-264V 50/60HZ O/P 9-24V 700mA max. 16w	
Insulation	Class I	
Protection	IP20	
Tilt	-	
Rotation	-	
Operating Temperature	-20~40°	
Average Failure Time	L70(6k) >36000 (h)	

### MATERIALS

Luminaire	Steel
Reflector	Optic lens
Baffle	Plastic-ABS
Heat Sink	Extruded aluminium

\*1. LUMEN : for LED chip test results based on Tj=25°C", the ambient temperature at 25°C.  
This is the ideal (maximum) lumen. This lumen information is from the LED supplier.

\*3. LUMEN (Øsystem) (Total FLUX) : this lumen is from a luminaire with heat sink, reflector and fixture,  
this is the real lumen value including the loss due to different designs of reflectors and fixtures.

# SURF 10

LED FIXED RECESSED DOWNLIGHT  
DLD/5044161-10



## PRODUCT CODE CONSTRUCTION

SURF 10 LED FIXED RECESSED DOWNLIGHT

DLD/5044161-10 / [X] / [X] / [X] / [X] / [X]

LIGHT COLOUR TEMPERATURE (CCT):  
[27K] [30K]  
2700°K 3000°K

BEAM ANGLE:  
[10D] [15D] [30D]  
10° 15° 30°

WATTAGE:  
[22W]  
22W

BAFFLE FINISH:  
[BK] [WH]  
Black White

BEZEL FINISH:  
[WH]  
White

 01189 889414

 [enquiries@dld-contract.co.uk](mailto:enquiries@dld-contract.co.uk)

 [dld-contract.co.uk](http://dld-contract.co.uk)

DLD Contract Ltd  
Unit 9 Brookside Business Centre  
Church Road  
Swallowfield  
Reading  
Berkshire  
RG7 1TH