


SURF 15

LED FIXED RECESSED DOWNLIGHT
DLD/5044161-15

DLD
CONTRACT

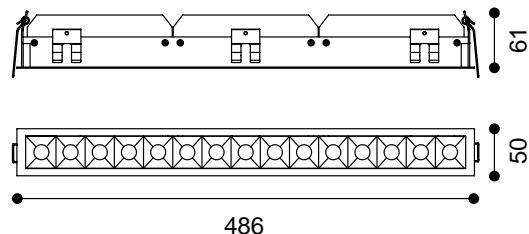

Dimensions

W.486mm D.50mm H.61mm

Cutout

477mm x 41mm



- High power LED adjustable downlight
- IP20
- Bezel finish: white

- Baffle finish: black / white
- Complete with phase dimming driver
- Suitable for 1-10V, TRIAC & DALI dimming

SURF 15

LED FIXED RECESSED DOWNLIGHT
DLD/5044161-15



TECHNICAL OVERVIEW

LED Consumption	33W (2.2W x 15)	
Current	700mA	
CCT	2700K	3000K
Lumen *1	-	200lm x 15
Øsystem *3	-	-
Voltage	-	
Reflector	10°/15°/30°	
CRI	80+	
Driver	Remoted, I/P: 90-264V 50/60HZ O/P 9-24V 700mA max. 16w	
Insulation	Class I	
Protection	IP20	
Tilt	-	
Rotation	-	
Operating Temperature	-20~40°	
Average Failure Time	L70(6k) >36000 (h)	

MATERIALS

Luminaire	Steel
Reflector	Optic lens
Baffle	Plastic-ABS
Heat Sink	Extruded aluminium

*1. LUMEN : for LED chip test results based on Tj=25°C", the ambient temperature at 25°C.
This is the ideal (maximum) lumen. This lumen information is from the LED supplier.

*3. LUMEN (Øsystem) (Total FLUX) : this lumen is from a luminaire with heat sink, reflector and fixture,
this is the real lumen value including the loss due to different designs of reflectors and fixtures.

SURF 15

LED FIXED RECESSED DOWNLIGHT
DLD/5044161-15



PRODUCT CODE CONSTRUCTION

SURF 15 LED FIXED RECESSED DOWNLIGHT

DLD/5044161-15 / [X] / [X] / [X] / [X] / [X]

LIGHT COLOUR TEMPERATURE (CCT):
[27K] [30K]
2700°K 3000°K

BEAM ANGLE:
[10D] [15D] [30D]
10° 15° 30°

WATTAGE:
[33W]
33W

BAFFLE FINISH:
[BK] [WH]
Black White

BEZEL FINISH:
[WH]
White

 01189 889414

 enquiries@dld-contract.co.uk

 dld-contract.co.uk

DLD Contract Ltd
Unit 9 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH