


SURF 5

LED ADJUSTABLE RECESSED DOWNLIGHT
DLD/7044161-5

DLD
CONTRACT

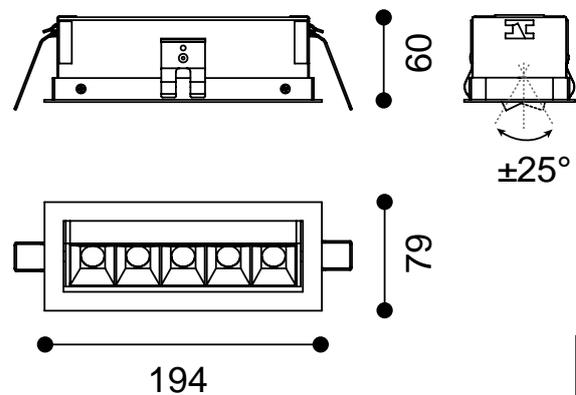

Dimensions

W.194mm D.79mm H.60mm

Cutout

183mm x 70mm



- High power LED adjustable downlight
- IP20
- Adjustable by 25° tilt

- Bezel finish: white
- Baffle finish: black / white
- Complete with phase dimming driver
- Suitable for 1-10V, TRIAC & DALI dimming

SURF 5

LED ADJUSTABLE RECESSED DOWNLIGHT
DLD/7044161-5



TECHNICAL OVERVIEW

| | | |
|-----------------------|---|-----------|
| LED Consumption | 11W (2.2W x 5) | |
| Current | 700mA | |
| CCT | 2700K | 3000K |
| Lumen *1 | - | 200lm x 5 |
| Øsystem *3 | - | - |
| Voltage | - | |
| Reflector | 10°/15°/30° | |
| CRI | 80+ | |
| Driver | Remoted, I/P: 90-264V 50/60HZ O/P 9-24V 700mA max. 16w | |
| Insulation | Class I | |
| Protection | IP20 | |
| Tilt | ± 0~25° | |
| Rotation | - | |
| Operating Temperature | -20~40° | |
| Average Failure Time | L70(6k) >36000 (h) | |

MATERIALS

| | |
|-----------|--------------------|
| Luminaire | Steel |
| Reflector | Optic lens |
| Baffle | Plastic-ABS |
| Heat Sink | Extruded aluminium |

*1. LUMEN : for LED chip test results based on Tc=85°C.

This is the ideal (maximum) lumen. This lumen information is from the LED supplier.

*3. LUMEN (Øsystem) (Total FLUX) : this lumen is from a luminaire with heat sink, reflector and fixture, this is the real lumen value including the loss due to different designs of reflectors and fixtures.

SURF 5

LED ADJUSTABLE RECESSED DOWNLIGHT
DLD/7044161-5

DLD
CONTRACT

PRODUCT CODE CONSTRUCTION

SURF 5 LED ADJUSTABLE RECESSED DOWNLIGHT

DLD/7044161-5 / [X] / [X] / [X] / [X] / [X]

LIGHT COLOUR TEMPERATURE (CCT):

[27K] [30K]

2700°K 3000°K

BEAM ANGLE:

[10D] [15D] [30D]

10° 15° 30°

WATTAGE:

[11W]

11W

BAFFLE FINISH:

[BK] [WH]

Black White

BEZEL FINISH:

[WH]

White

 01189 889414

 enquiries@dld-contract.co.uk

 dld-contract.co.uk

DLD Contract Ltd
Unit 9 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH