



**VIGO MINI ROUND LED**  
RECESSED ADJUSTABLE DOWNLIGHT  
DLD/1021113IL

**DLD**  
**CONTRACT**



75mm



Ø 60mm

30°



Ø 55mm

**Dimensions**  
Ø60mm, H.75mm

**Tilt**  
30°

**Cutout**  
Ø55mm

- IP20
- 7W CREE LED COB (chip on board)
- Beam angle: 15° | 25° | 36° | 54°
- Ø55mm round cutout
- 30° adjustable tilt
- 35° glare cut
- 0.22kg weight
- Driver included - non-dim | 1-10V | TRIAC | DALI



**VIGO MINI ROUND LED**  
RECESSED ADJUSTABLE DOWNLIGHT  
DLD/1021113IL




**OVERVIEW**

Power	Beam	Flux	CCT	Non-dim	1-10V dim	TRIAC dim	DALI dim
7W	15°	293lm	2700K	Y	Y	Y	Y
7W	15°	320lm	3000K	Y	Y	Y	Y
7W	15°	376lm	4000K	Y	Y	Y	Y
7W	26°	336lm	2700K	Y	Y	Y	Y
7W	26°	369lm	3000K	Y	Y	Y	Y
7W	26°	361lm	4000K	Y	Y	Y	Y
7W	36°	392lm	2700K	Y	Y	Y	Y
7W	36°	410lm	3000K	Y	Y	Y	Y
7W	36°	420lm	4000K	Y	Y	Y	Y
7W	54°	312lm	2700K	Y	Y	Y	Y
7W	54°	345lm	3000K	Y	Y	Y	Y
7W	54°	339lm	4000K	Y	Y	Y	Y

LUMINOUS DISTRIBUTION DIAGRAM - 7W

15°

CRI >90  
 Output V 12V DC  
 Input I 500mA

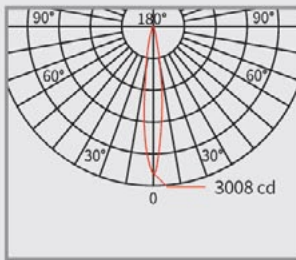


2700K		
h(m)	∅(m)	LUX(Center/avg)
2	0.54	685/472
3	0.81	305/210
4	1.08	171/118

3000K		
h(m)	∅(m)	LUX(Center/avg)
2	0.53	752/515
3	0.80	334/229
4	1.06	188/129

4000K		
h(m)	∅(m)	LUX(Center/avg)
2	0.53	885/610
3	0.80	393/271
4	1.06	221/152

26°

CRI >90  
 Output V 36V DC  
 Input I 150mA

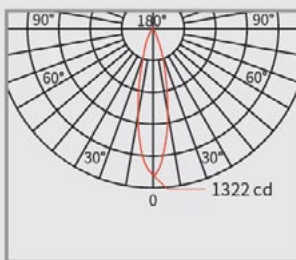


2700K		
h(m)	∅(m)	LUX(Center/avg)
2	0.91	303/209
3	1.37	134/93
4	1.83	76/52

3000K		
h(m)	∅(m)	LUX(Center/avg)
2	0.92	331/229
3	1.37	147/102
4	1.83	83/57

4000K		
h(m)	∅(m)	LUX(Center/avg)
2	0.93	315/209
3	1.40	140/93
4	1.86	79/52

36°

CRI >90  
 Output V 36V DC  
 Input I 150mA

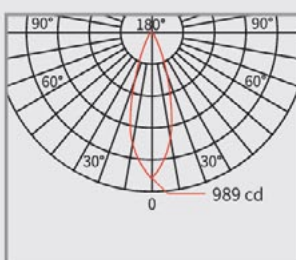


2700K		
h(m)	∅(m)	LUX(Center/avg)
2	1.25	239/156
3	1.88	106/69
4	2.50	60/39

3000K		
h(m)	∅(m)	LUX(Center/avg)
2	1.27	247/163
3	1.90	110/72
4	2.54	62/41

4000K		
h(m)	∅(m)	LUX(Center/avg)
2	1.27	252/167
3	1.91	112/74
4	2.55	63/42

54°

CRI >90  
 Output V 36V DC  
 Input I 150mA

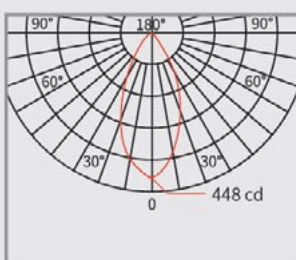

2700K		
h(m)	∅(m)	LUX(Center/avg)
2	1.98	103/63
3	2.97	46/28
4	3.96	26/16

3000K		
h(m)	∅(m)	LUX(Center/avg)
2	2.04	112/68
3	3.05	50/30
4	4.07	28/17

4000K		
h(m)	∅(m)	LUX(Center/avg)
2	2.02	111/67
3	3.03	49/30
4	4.04	28/17

**VIGO MINI ROUND LED**  
RECESSED ADJUSTABLE DOWNLIGHT  
DLD/1021113IL



**BEZEL / BAFFLE FINISH**



White bezel / Black baffle




White bezel / White baffle



Black bezel / Black baffle

**BEAM ANGLE**




15°



26°




36°

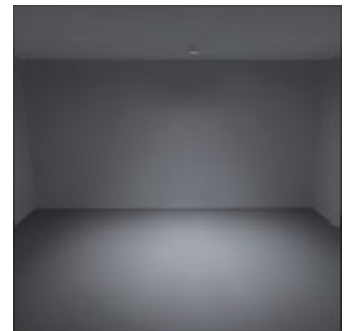

54°

**LENS**



Tensile lens



Soft lens



Honeycomb louvre

PRODUCT CODE CONSTRUCTION

VIGO MINI ROUND LED RECESSED ADJUSTABLE DOWNLIGHT

DLD/1021113IL / [X] / [X] / [X] / [X] / [X] / [X] / [X]

CONTROL:

[NON] [1/10V] [TRI] [DAL]

NON-DIM 1-10V DIM TRIAC DIM DALI DIM

LENS:

[TNL] [SFL] [HL]

Tensile Lens Soft Lens Honeycomb louvre

LIGHT COLOUR TEMPERATURE (CCT):

[27K] [30K] [40K]

2700°K 3000°K 4000°K

BEAM ANGLE:

[15D] [26D] [36D] [54D]

15° 26° 36° 54°

WATTAGE:

[7W]

7W

BAFFLE FINISH:

[WH] [BK]

White Black

BEZEL FINISH:

[WH] [BK]

White Black



01189 889414



enquiries@dld-contract.co.uk



dld-contract.co.uk

DLD Contract Ltd  
Unit 9 Brookside Nurseries  
Church Road  
Swallowfield  
Reading  
Berkshire  
RG7 1TH