


CORONA LUX
SURFACE MOUNTED LED CEILING LIGHT



Dimensions
Ø570mm H.190mm

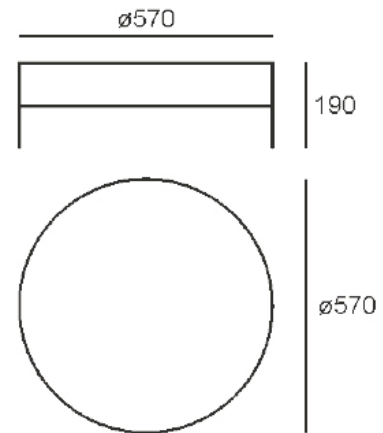

OVERVIEW

- Ceiling mounted
- Made from steel
- High quality single output LED
- 3 light outputs, single row LED or triple row LEDs
- Suitable for residential or commercial
- 1-10V or DALI dimmable versions

FINISHES



All the information in this document is provided in good faith. DLD Contract will not be held responsible for any losses due to inaccuracies within this document.

CORONA LUX


SURFACE MOUNTED LED CEILING LIGHT



TECHNICAL SPECIFICATIONS

LED MODULE	LIGHT COLOUR TEMPERATURE (CCT)	LUMEN
Single row LED 1R	3000°K 4000°K	5500 lm
Triple row LED 3R	3000°K 4000°K	5500 lm
Triple row LED 3R	3000°K 4000°K	3250 lm

Light flux tolerance +/- 10%

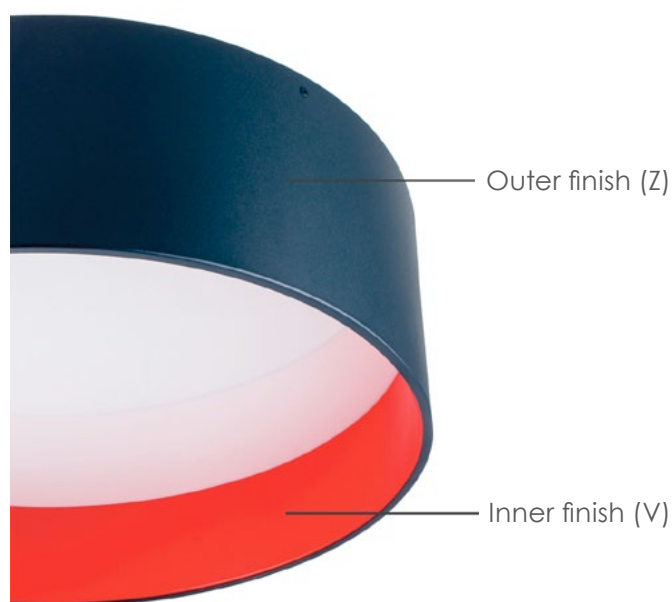

 01189 889414

 enquiries@dld-contract.co.uk

 dld-contract.co.uk

DLD Contract Ltd
Unit 9 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH