


Driveway Lite PURE LED

Cat. NO DWL/L

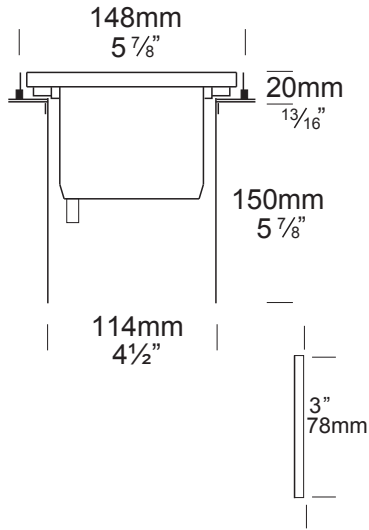

PURE LED
Pure Performance

The Driveway Lite is a luminaire designed to mount flush with the level of the driveway, pathway, hotel floor or building foyer. It has a 'Flush Fit' lens which stops water pooling and depositing dirt on the lens. There is no lip to trip over.

The HUNZA PURE LED system uses the latest Cree MTG-2 LED chips for maximum performance and long life. Power supply options include a choice of integral 12 volt driver or an external remote (series connection) driver. The PURE LED system incorporates an innovative Plug-and-Play system for easy replacement or upgrade of either LED engine or integral driver.

The Driveway Lite is supplied with a mounting canister that facilitates ease of installation. The luminaire can be driven over or walked upon without being damaged. Designed so the lamp can be angled up to 20 degrees, directed at a bush, tree, or the outside of a building, etc. without the need to remove the luminaire from the mounting canister due to the vandal-resistant three allen head screw fixing system which attaches the flange to the body of the luminaire. This luminaire has a solid bronze or 316 stainless steel flange with a powder coated black body.

- * At 700mA this fitting is the equivalent of a 35w halogen fitting.
- * At 1050mA this fitting is the equivalent of a 50w halogen fitting.

Ordering Information

Luminaire	Driver mA	Beam Angle	Colour Temp	Accessories	Material/Finish
DWL/L	S - Series D7 - 12V 700mA D10 - 12V 1050mA	15 - 15° TIR Lens 25 - 25° TIR Lens 38 - 38° Reflector 60 - 60° Reflector	3 - 3000K 4 - 4000K	CJK150 - Cable Joint Kit HCR - Hex Cell Retainer LENSLLF - Frosted Lens	SBZ - Solid Bronze SS - Stainless Steel

Ordering Example: DWL/L S 15 4 HCR SS

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

Body

Cast from virgin high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant black polyester powder coat.

Flanges

The flange is attached to the body by three 316 stainless steel allen head anti vandal screws and is available in either:

Solid bronze - 150mm (6") bar.

316 Stainless Steel - 150mm (6") rod.

Luminaire Weight

BRZ 1.950kg (4lb 4oz)

SS 1.900kg (4lb 3oz)

Features

Lens

12mm (½") extra clear low iron flush fit shatter resistant glass. Lifetime Warranty.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Accessories

Cable Joint Kit (Cat. CJK150).

Frosted Lens (Cat. LENSLLF).

Hex Cell Retainer (Cat. HCR).

Mounting

Supplied with a mounting canister for casting in concrete to facilitate ease of installation. The luminaire can be driven over or walked upon without being damaged. Maximum drive over speed 10 km/h (6 mph) and weight 1500kg (3300lbs).

Technical Information

Standards

AS/NZS 61046

IP56/IP66 UL 1838

LED

Cree MTG-2 Plug and Play, field replaceable PCB board.

Lumen Output: 510 at 1050mA

Lumens Per watt: 85 at 6watts

CRI Warm White (3000k): 85+

Colour Temp: 3,000 and 4,000K

Power Supply

Series (External) Driver

Constant current driver

Output: 6vdc at 1050mA maximum

Integral 12 Volt Driver

Hunza™ Plug and Play Driver


Input: 12vac, 7 watt total

Output: 6vdc nominal, 350 / 700 / 1050mA


Transformer

Hunza™ Wall Mount Transformer for use with integral 12 volt driver


Reflector Beam Angles




15° Angle
3000 K



25° Angle
3000 K



38° Angle
3000 K



60° Angle
3000 K