


Mini Bollard PURE LED

Cat. No. BOLMINI/L

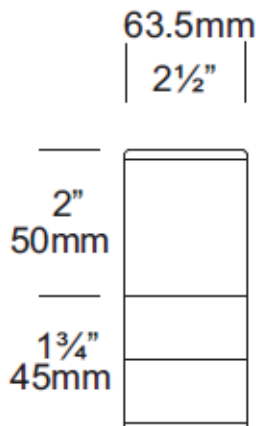

PURE LED
Pure Performance

The Mini Bollard (95mm) PURE LED is ideal for garden edges. The acrylic lens reflects light at two angles through an anti-glare mesh directly onto the ground and horizontally to illuminate the surrounding landscape.


Constructed of tubular aluminium with a UV stable powder coat or machined from solid copper or 316 stainless steel.

The Hunza PURE LED system uses the latest Cree XTE chips for maximum performance and long life. Power supply is from an external remote (series connection) driver. The PURE LED system incorporates an innovative Plug-and-Play system for easy replacement or upgrade of the LED engine or in the field.

*At 350mA this fitting is the equivalent of a 25w halogen fitting.

*At 700mA this fitting is the equivalent of a 35w halogen fitting.

Ordering Information

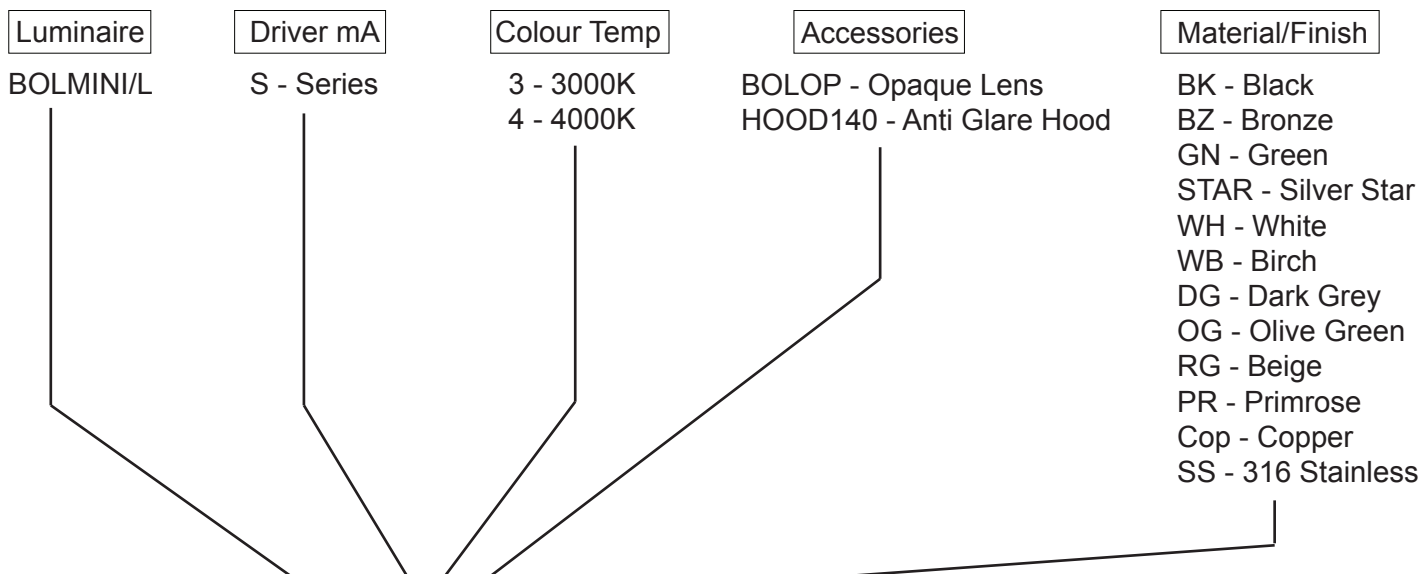

Ordering Example: BOLMINI/L S 3 FM SS

HUNZATM PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.

End cap - solid aluminium 63.5mm (2½") with chromate substrate and high UV resistant polyester powder coat colours

Colour Black, Bronze, Green, Silver Star, White, Birch, Dark Grey, Olive Green, Beige, Primrose.

Copper 63.5mm (2½") x 10mm (13/32").

End cap - solid copper 63.5mm (2½").

316 Stainless Steel 63.5mm (2½") x 9mm (11/32").

End cap - solid 316 stainless steel 63.5mm (2½").

Luminaire Weight

Alum .37kg (1 3oz)

Cop .6kg (1lb 5oz)

SS .5kg (1lb 1oz)

Features

Lens

UV stable polycarbonate lens with anti-glare mesh and dual angle reflector projects light horizontally and at 45° onto the ground.

Gasket

Silicone, iron impregnated 220°c (428°f)

Accessories

Opaque Lens (Cat. LENSBOLOP)

Anti Glare Hood (Cat. HOOD140)

Mounting

For mounting on top of posts, railings, etc. It is not suited for ground installation.

Technical Information

Standards

AS/NZS 61046

IP56/IP66 UL 1838

LED

Cree MTG-2 Plug and Play, field replaceable LED board.

Lumen Output: 510 at 1050mA

Lumens Per watt: 85 at 6watt

CRI Warm White (3000k): 85+

Colour Temp: 3,000 and 4,000K

Power Supply

Series (External) Driver

Constant current driver

Output: 6vdc at 1050mA maximum