



# Double Pagoda Lite


Cat. No. PGLPGL  
 Cat. No. PGLPGL/R  
 Cat. No. PGLPGL/GU

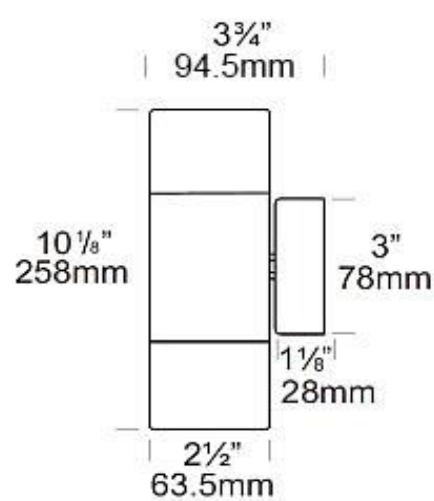

Low Voltage

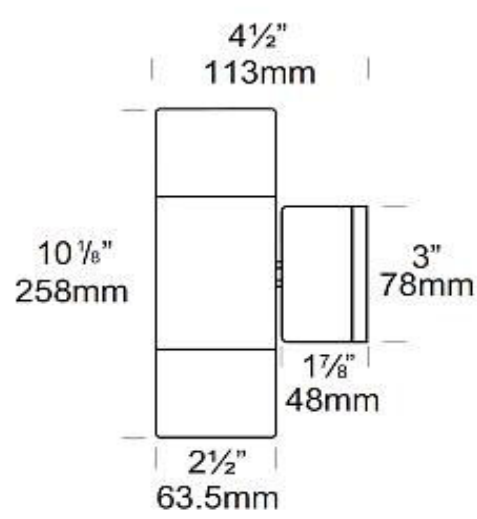

Retro™

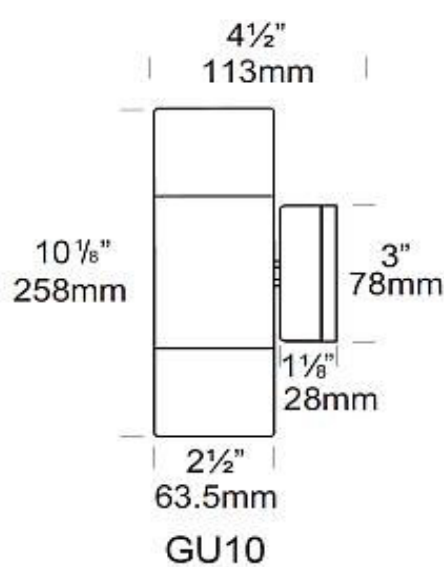

GU10



## UK & European Specification

The Double Pagoda Lite - also referred to as the Pagoda Pagoda Lite - has two G4 lamps, which produce a general lighting effect. This luminaire is not for directional lighting. The lens is manufactured from high quality UV stable polycarbonate with stainless anti-glare mesh.

The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base size increases in size to accommodate the encapsulated IP66 dimmable transformer.

A G9 version of this luminaire is also available for line voltage lamps.

## Ordering Information

Luminaire	Material/Finish	Accessories
PGLPGL - Pagoda Pagoda Lite	BK - Black	CJK - Cable joint Kit
PGLPGL/R - Retro	BZ - Bronze	LENSBOLOP - Opaque Lens
PGLPGL/GU - GU10	GN - Green	/R - Retro Transformer 110 /240-12 Volt
	STAR - Silver Star	WBAP - Wall Box Adaptor Plate
	WH - White	G9 - G9 Option
	WB - Birch	
	DG - Dark Grey	
	OG - Olive Green	
	RG - Beige	
	PR - Primrose	
	COP - Copper	
	SS - 316 Stainless Steel	

Example: **PGLPGL BK**

(Accessories ordered separately)

### Luminaire Construction

**CNC machined from one of the following metals:**

**Body:** High corrosion resistant low copper 63.5mm (2½") x 10mm (3/8") aluminium.

**Base & Mounting Plate:** Cast from virgin high corrosion resistant CC401 low copper aluminium alloy chromate substrate and high UV resistant polyester powder coat - Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

**Body:** Copper 63.5mm (2½") x 10mm (3/8").

**Base:** Copper Hand spun 2mm (1/13").

**Mounting Plate:** Forged brass (Retro™).

**Body:** 316 Stainless steel 63.5mm (2½") x 9mm (11/13") rod.

**Base:** Investment cast and CNC machined.

**Mounting Plate:** Investment cast and CNC machined (Retro™).

### Mounting

12 volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth.

Retro™ luminaire (110/240-12 volt): a mounting plate is fixed to the wall using two screws and then the luminaire is fixed to the mounting plate.

### Features

#### Lens:

UV stable clear polycarbonate with stainless anti-glare mesh.

#### Gaskets:

Silicone, iron impregnated 220°C (428°F)

#### Lamp Holders:

G4 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

G9 - 280°C (536°F) ceramic lamp holder with 250°C (480°F) teflon cables.

#### Accessories:

Cable Joint Kit (Cat. CJK150)

Retro™ Transformer 110/240-12 volt (Cat. /R).

Opaque Lens (Cat. LENSBOLOP).

G9 Option (Cat. G9).

### Standards

IP66 AS/NZS61046

UL1838

### Luminaire Weight

12 volt:

Alum .870kg (1lb 14oz)

Cop 1.920kg (4lb 4oz)

SS 1.820kg (4lb)

Retro™:

Alum 1.200kg (2lb 10oz)

Cop 2.200kg (4lb 13oz)

SS 2.100kg (4lb 10oz)

### Power Supply

12 volt

HUNZA™ Inground or HUNZA™ Wall Mount Transformer: not included.

RETRO™

HUNZA™ 110/240-12 volt ac silicone encapsulated electronic transformer built into the Retro™ base.

Dimmable with a suitable dimmer.

Approved for internal use.

### Supplied With

2 x G4 Bi-Pi n 5,10,20 watt lamp max.

G9 - 25 watt lamp max.