



Sign Lite

Cat. No. SGNL



The Sign Lite is for lighting signs, wall displays, building highlights, and external barbeques. The fully adjustable head is mounted on the end of a 500mm (19.5") arm, allowing 360° rotation and 90 degree elevation.

Available in 12 volt or with a built in 110 or 240 volt transformer (Retro™) option. This luminaire is machined from a choice of 10mm thick aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

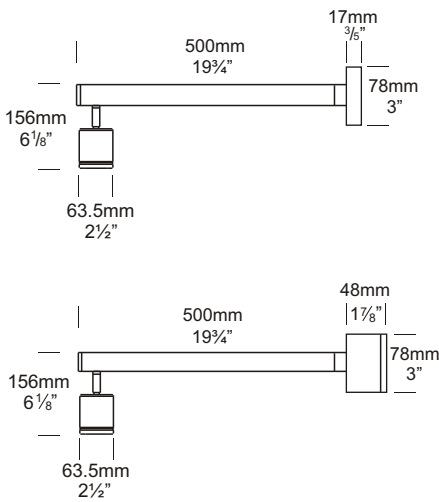

Ordering Information

Luminaire Type

SGNL - Sign Lite

Material/Finish

BK - Black
 BZ - Bronze
 GN - Green
 STAR - Silver Star
 COP - Copper
 SS - 316 Stainless Steel

Accessories

CJK150 - Cable Joint Kit
 LENSSTEPF - Frost Lens
 GG - Glare Guard
 HCL - Hex Cell Louvre Adaptor
 /R - Retro™ Transformer
 110/240-12 volt
 For an alternative LED option start at page 10.4

Ordering Example: SGNL SS - Sign Lite 316 Stainless Steel

HCL - Hex Cell Louvre Adaptor
 (Accessories ordered separately)



HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
 130 Felton Mathew Ave
 Glen Innes
 Auckland 1072
 New Zealand

Ph: 64-9-528 9471
 Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
 Manufactured in New Zealand.

© 2009 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat - Colours Black, Bronze, Green, Silver Star, White.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

316 Stainless Steel 63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Poles Aluminium, Copper, 316 Stainless 38mm (1½") x 500mm (19¾") tube.

Mounting

12 volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada.

Retro™ 110/240-12 volt: a mounting plate is fixed to the wall using two screws, the luminaire is fitted to the mounting plate.

Features

Lens:
10mm (3/8") clear flush fit shatter resistant glass. Life Time Warranty.

Gaskets:
Silicone, iron impregnated 220°C (428°F).

Lamp Holder:
GU 5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:
Cable Joint Kit (Cat. CJK150).
Not approved for USA/Canada.
Frosted Lens (Cat. LENSSTEPF).
Glare Guard (Cat. GG).
Hex Cell Louvre Adaptor (Cat. HCL).
Retro™ transformer 110/240-12 volt (Cat. /R) IP66.

Swivel:
Aluminium and **Copper** luminaires 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP56/IP66



UL1838

Luminaire Weight

12 volt: Alum 1kg (2lb 2oz)
Cop 2.140kg (4lb 11oz)
SS 1.620kg (3lb 9oz)
Retro™: Alum 1.5kg (3lb 3oz)
Cop 3.200kg (7lb)
SS 3.055kg (6lb 11oz)

Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

RETRO™

HUNZA™ 110/240-12 volt ac potted electronic transformer is built into the base.
Dimmable with a suitable dimmer.
* Note see page 7.4 for details.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.










Luminaire: supplied with

MR16 GU5.3 20, 35, 50 watt lamp max.
LED - Refer sheet no. 10.4

USA and Canada:

MR16 GU5.3 20 watt lamp.
When glare guard fitted lamp wattage can be increased to 35 watt.

LED - Refer sheet no. 10.4

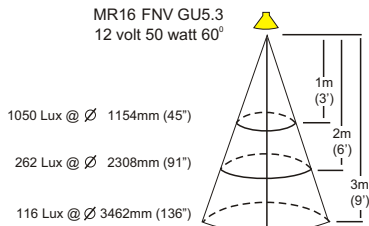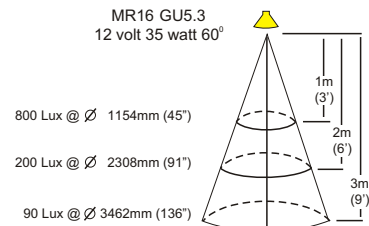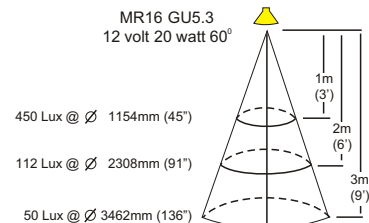

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2009 Hunza Holdings Ltd.

Ver 1.4