


Spike Spot PURE LED

Cat. No. SS/L

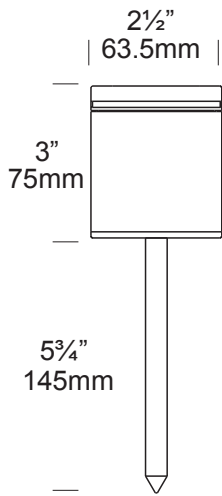

PURE LED
Pure Performance

The Spike Spot PURE LED is inserted into the ground and can be easily aimed by angling the luminaire in the desired direction. This fixture is ideal for illuminating bushes and trees from ground level.

The luminaire is machined from a choice of 10mm solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

The Hunza PURE LED system uses Cree MTG-2 chip for maximum performance and long life. Power supply options include a choice of 12 volt integral or a remote (series connection) driver. The PURE LED system incorporates HUNZA's Plug-and-Play system for easy replacement of either the LED engine or integral driver in the field. Four beam angles, and a choice of a Warm or Cool White colour temperatures are available.

*At 700mA this fitting is the equivalent of a 35w halogen fitting.
*At 1050mA this fitting is the equivalent of a 50w halogen fitting.

Ordering Information

Luminaire	Driver mA	Lens	Colour Temp	Accessories	Material/Finish
SS/L	S - Series Wiring D7 - 700mA D10 - 1050mA	15 - 15° TIR Lens 25 - 25° TIR Lens 38 - 38° Reflector 60 - 60° Reflector	2 - 2700K 3 - 3000K 4 - 4000K	CJK150 - Cable Joint Kit STEPF - Frosted GG - Glare Guard HCL - Hex Cell Louvre /300 - Ground Spike 300mm	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose COP - Copper SS - 316 Stainless
SS/L D10 60 4 CJK150 SS					

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without
notice. Manufactured in New Zealand.
© 2015 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

316 Stainless Steel 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Luminaire Weight

Alum .450kg (15oz)
Cop 1.250kg (2lb 12oz)
SS .960kg (2lb 1oz)

Luminaire Features

Lens:

10mm (3/8") thick frosted Borosilica dome glass. Lifetime Warranty.

Gaskets:

Silicone, iron impregnated 220°c (428°f).

Accessories:

Cable Joint Kit (Cat. CJK150)
Frosted Lens (Cat. STEPF)
Glare Guard (Cat. GG)
Hex Cell Louvre (Cat. HCL)
300mm (12") Spike (Cat. /300)

Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

Technical Information

Standards

AS/NZS 61046
IP56/IP66 UL 1838

LED

Cree MTG-2 Plug and Play, field replaceable LED board.

Lumen Output: 510 at 1050mA
Lumens Per watt: 85 at 6watts
CRI Warm White (3000k): 85+
Colour Temp: 3,000 and 4,000K

Power Supply

Series (External) Driver

Constant current driver
Output: 6vdc at 1050mA maximum


Integral 12 Volt Driver

Hunza™ Plug and Play Driver
Input: 12vac, 7 watt total
Output: 6vdc nominal, 350 / 700 / 1005mA


Transformer

Hunza™ Wall Mount Transformer for use with integral 12 volt driver


Reflector Beam Angles




15° Angle
3000 K



25° Angle
3000 K



38° Angle
3000 K



60° Angle
3000 K