
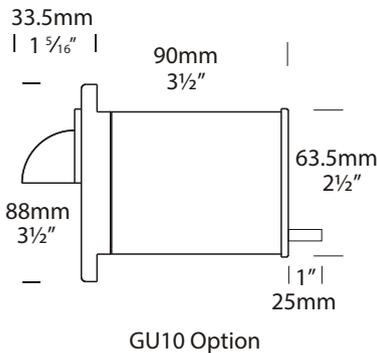
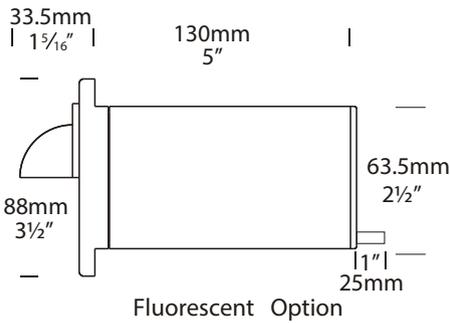


Step Lite Eyelid

Cat. No. SLE

Cat. No. SLEFL

Cat. No. SLEGU

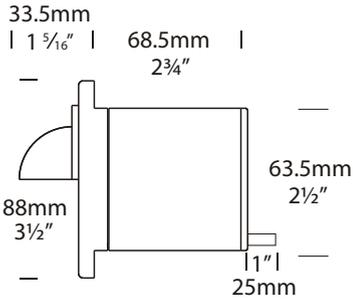

The Step Lite Eyelid is designed with a 88mm (3 1/2") flange and recessed body for flush mounting into masonry, stone or wood, providing illumination of steps and low level features such as exterior paved areas. The Eyelid feature eliminates all upward light, providing an excellent glare-free illuminating effect. When a canister is used there are no mounting holes in the flange.

A 110/240 volt fluorescent option is available which offers excellent light output, low energy usage and very low heat generation, this changes the luminaire to an IP66 rating.

A GU10 version of this luminaire is also available for line voltage lamps. However, a longer luminaire body is needed to accommodate the longer lamp.

Ordering Information

Luminaire Type

SLE - Step Lite Eyelid

Material/Finish

BK - Black
 BZ - Bronze
 GN - Green
 STAR - Silver Star
 WH - White
 WB - Birch
 DG - Dark Grey
 OG - Olive Green
 RG - Beige
 PR - Primrose
 COP - Copper

Accessories

CJK150 - Cable Joint Kit
 LENSSTEPF - Frosted Lens
 FL - Fluorescent Option
 HCL - Hex Cell Louvre Adaptor
 Canss - 316 Stainless Steel Canister
 Flucan - Fluorescent Canister
 Scan - Step Lite Canister
 GU - GU10 Option

For LED options, refer to page 10.4 (dedicated LED), 10.4.3 (6 watt), 10.4.4 (3 watt) or <http://hunza.co.nz/l.html>

Ordering Example: SLEFL COP - Step Lite Eyelid in Copper with Fluorescent Option.

SLEGU BK - Step Lite Eyelid GU10 in Black

HCL STAR - Hex Cell Louvre in Silver Star
 (Accessories ordered separately)

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
 130 Felton Mathew Ave
 Glen Innes
 Auckland 1072
 New Zealand

Ph: 64-9-528 9471
 Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
 Manufactured in New Zealand.
 © 2011 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2½") rod, flange 90mm (3½") solid aluminium rod with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper: 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

Flange 90mm (3½") solid copper rod.

Mounting

Designed to fit through a 66mm (2 5/8") hole and be fixed into position by two screws in the flange or a Step Lite canister (see accessories) can be used which maintains the aesthetic look of the flange by eliminating the two screw holes in the flange.

Features

Lens:
3mm (1/8") thick clear tempered shatter resistant glass.

Lifetime Warranty .

Gaskets:
Silicone, iron impregnated 220°C (428°F).

Lamp Holders:
GU5.3 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Fluorescent:
E27 PET 210°C (410°F) base mount.
E26 available in the USA.

Accessories:
Cable Joint Kit (Cat. CJK150)
Not approved for USA /Canada.
Fluorescent Option 8watt 240 volt (Cat. FL) IP66.
Frosted Lens (Cat. LENSSTEPF).
Hex Cell Louvre Adaptor (Cat. HCL).
Step Canister (Cat. Slcan).
Fluorescent Canister, PVC (Cat. Flucan).
316 S stainless Canister for use in lime stone etc. (Cat. Canss).
GU10 Option (Cat. GU).

Standards

EN60598

IP66/IP68



UL1838

Luminaire Weight

12 volt
Alum .465kg (1lb)
Cop 1.340kg (2lb 15oz)

Fluorescent IP66
Alum .780kg (1lb 11oz)
Cop 2.275kg (5lb)

Power Supply

HUNZA™ Inground or Wall Mount
Transformer: not included.

USA and Canada :
HUNZA™ Wall Mount Transformer:
not included.



Luminaire: supplied with

Halogen
MR16 GU5.3 20 watt lamp max.
Fluorescent
E27 - 110/240 volt self ballasted lamp.
GU10 - GU10 25 or 35 watt lamp max.

LED - Refer to previous page.

USA and Canada:
MR16 GU5.3 20 watt lamp max.
GU10 Halogen - Lamp not supplied
LED - Refer to previous page.

Step Lite Eyelid MR16 BAB 20 watt lamp - Lens height 400 mm (15¾")

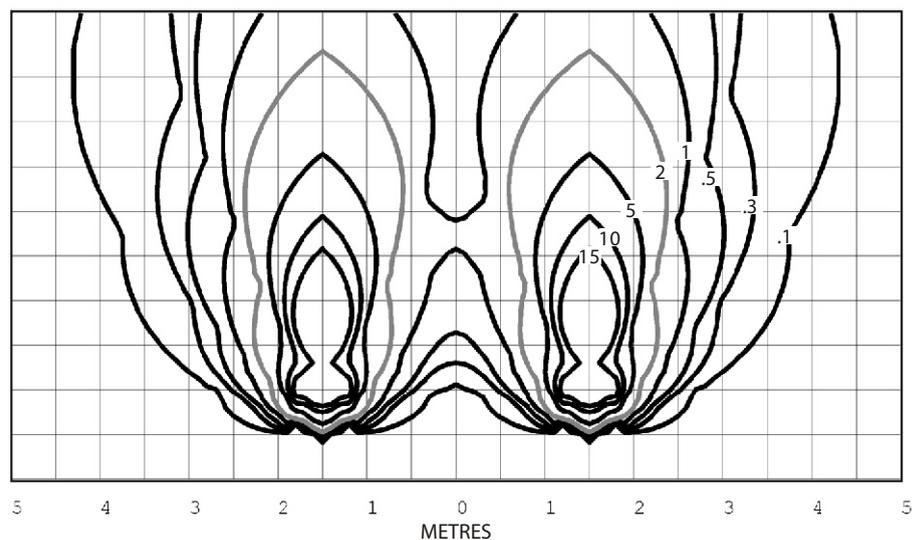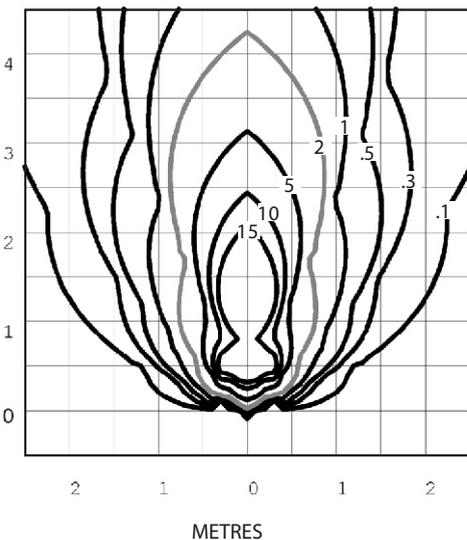

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4