



Step Lite Eyelid PURE LED

Cat. No. SLE/L/S



PURE LED
Pure Performance

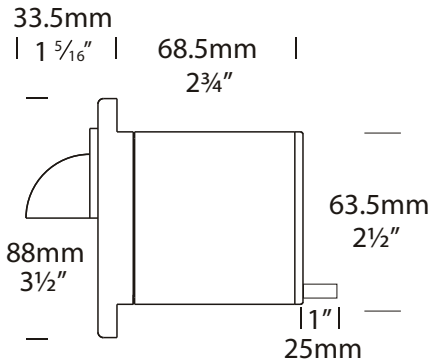

The Step Lite Eyelid Pure LED is designed with a 88mm (3 1/2") flange and recessed body for flush mounting into masonry, stone or wood, providing illumination of steps and low level features such as exterior paved areas. The Eyelid feature eliminates all upward light, providing an excellent glare-free illuminating effect. When a canister is used there are no mounting holes in the flange.

The Hunza PURE LED system uses the latest Cree MTG-2 LED chips for maximum performance and long life. Power supply options include a choice of integral 12 volt driver or an external remote driver. The PURE LED system incorporates an innovative Plug- and-Play system for easy replacement or upgrade of either the LED engine or integral driver.

* At 700mA this fitting is the equivalent of a 35w halogen fitting.

* At 1050mA this fitting is the equivalent of a 50w halogen fitting.

Ordering Information

Luminaire	Driver mA	Colour Temp	Accessories	Material/Finish
SLE/S	S - Series D7 - 12v 700mA D10 - 12v 1050mA	3 - 3000K 4 - 4000K	CJK150 - Cable Joint Kit STEPF - Frosted Lens HCL - Hex cell Louvre SLCAN - Step Lite Canister CANSS - Step Lite Canister Stainless Steel DKCAN - Deck Canister	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose SS - Stainless Steel COP - Copper

Ordering Example: SLE/L S 3 HCL BK

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2014 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, flange 90mm (3½") solid aluminium rod with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper: 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod. Flange 90mm (3½") solid copper rod.

316 Stainless Steel: 9mm (11/32"). Enc Cap - solid 316 stainless steel 63.5mm (2½") rod. Flange 90mm (3½") solid 316 stainless steel rod.

Luminaire Weight

Alum .465kg (1lb)
Cop 1.340kg (2lb 15oz)

Luminaire Features

Lens:

3mm (1/8") extra clear low iron flush fit shatter resistant glass. Lifetime Warranty.

Gasket:

Silicone, iron impregnated 220°C (428°F)

Accessories

Cable Joint Kit (Cat. CJK150)
Frosted Lens (Cat. LENSSTEPF)
Hex Cell Louvre (Cat. HCL)
Step Canister (Cat. SLCAN)
316 Stainless Canister for use in lime stone etc. (Cat. CAN)

Mounting

Designed to fit through a 66mm (2 5/8") hole and be fixed into position by two screws in the flange or a Step Lite canister (see accessories) can be used which maintains the aesthetic look of the flange by eliminating the two screw holes in the flange.

Technical Information

Standards

AS/NZS 61046
IP56/IP66 UL 1838

LED

Cree MTG-2 Plug and Play, field replaceable LED board.
Lumen Output: 519 at 1050mA
Lumens Per watt: 85 at 6w
CRI Warm White (3000k): 85+
Colour Temp: 3,000 and 4,000K

Power Supply

Series (External) Driver

Constant current driver
Output: 6vdc at 1050mA maximum

Integral 12 Volt Driver

Hunza™ Plug and Play Driver
Input: 12vac, 7 watt total
Output: 6vdc nominal, 350 / 700 / 1050mA

Transformer

Hunza™ Wall Mount Transformer for use with integral 12 volt driver