



Step Lite PURE LED

Cat. No. SL/L



PURE LED
Pure Performance

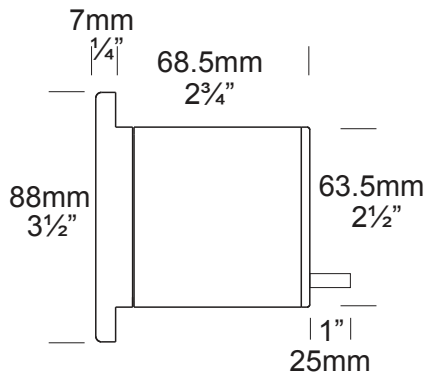

The Step Lite PURE LED is designed with an 88mm (3 1/2") flange for flush mounting into masonry, stone or wood. This luminaire is ideal for illumination of steps and ground level horizontal lighting, for example, across driveways or exterior paved areas. When a canister is used there are no mounting holes in the flange.

The Hunza PURE LED system uses the latest Cree MTG-2 LED chips for maximum performance and long life. Power supply options include a choice of integral 12 volt driver or an external remote driver. The PURE LED system incorporates an innovative Plug- and-Play system for easy replacement or upgrade of either the LED engine or integral driver. Four beam angles and a choice of a Warm or Cool White colour temperatures are available.

* At 700mA this fitting is the equivalent of a 35w halogen fitting.

* At 1050mA this fitting is the equivalent of a 50w halogen fitting.

Ordering Information

Luminaire	Driver mA	Beam Angle	Colour Temp	Accessories	Material/Finish
SL/L	S - Series D7 - 12v 700mA D10 - 12v 1050mA	15 - 15° TIR Lens 25 - 25° TIR Lens 38 - 38° TIR Lens 60 - 60° TIR Lens	2 - 2700K 3 - 3000K 4 - 4000K	CJK150 - Cable Joint Kit LENSSTEPF - Frosted HCL - Hex Cell Louvre Scan - Aluminium Canister Canss - 316 Stainless Canister	BK- Black BZ- Bronze GN- Green STAR- Silver Star WH- White WB- Birch DG- Dark Grey OG- Olive Green RG- Beige PR- Primrose COP- Copper SS- 316 Stainless

Ordering Example: SLS/L/S S 15 3 GG BK

HUNZA™
PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
St Johns
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2015 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, flange 90mm (3½") solid aluminium rod with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper: 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod. Flange 90mm (3½") solid copper rod.

316 Stainless Steel: 9mm (11/32"). Enc Cap - solid 316 stainless steel 63.5mm (2½") rod. Flange 90mm (3½") solid 316 stainless steel rod.

Luminaire Weight

Alum .465kg (1lb)
Cop 1.340kg (2lb 15oz)
SS 1.055kg (2lb 5oz)

Luminaire Features

Lens:

3mm (1/8") extra clear low iron flush fit shatter resistant glass. Lifetime Warranty.

Gasket:

Silicone, iron impregnated 220°C (428°F)

Accessories

Cable Joint Kit (Cat. CJK150)
Frosted Lens (Cat. LENSSTEPF)
Hex Cell Louvre (Cat. HCL)
Step Canister (Cat. SLCAN)
316 Stainless Canister for use in lime stone etc. (Cat. CAN)

Mounting

Designed to fit through a 66mm (2 5/8") hole and be fixed into position by two screws in the flange or a Step Lite canister (see accessories) can be used which maintains the aesthetic look of the flange by eliminating the two screw holes in the flange.

Technical Information

Standards

AS/NZS 61046
IP56/IP66 UL 1838

LED

Cree MTG-2 Plug and Play, field replaceable LED board.

Lumen Output: 600 at 1050mA
Lumens Per watt: 100 at 6 watts
CRI Warm White (3000k): 85+
Colour Temp: 2700K, 3000K and 4000K

Power Supply

Series (External) Driver

Constant current driver
Output: 6vdc at 1050mA maximum


Integral 12 Volt Driver

Hunza™ Plug and Play Driver
Input: 12vac, 7 watt total
Output: 6vdc nominal, 350 / 700 / 1050mA


Transformer

Hunza™ Wall Mount Transformer for use with integral 12 volt driver


Reflector Beam Angles




15° Angle
3000 K



25° Angle
3000 K



38° Angle
3000 K



60° Angle
3000 K