


# Twig Lite

Cat. No. TG

Cat. No. TG/R

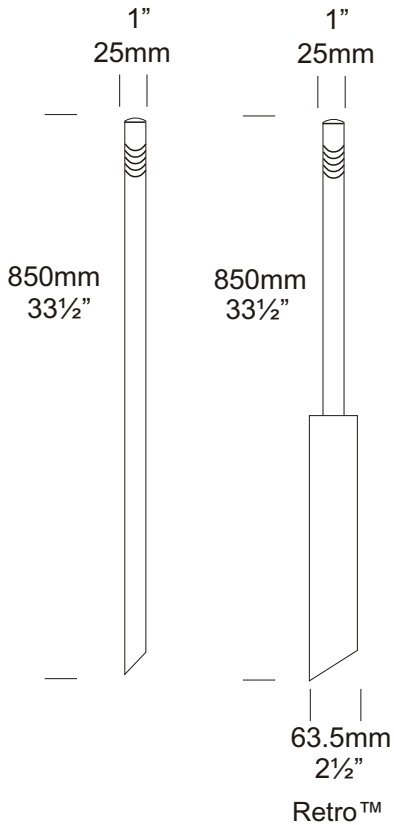

The Twig Lite has a subtle appearance, which allows it to blend into taller foliage. The luminaire has a frosted glass lens to reduce glare and is operated with a 5, 10 or 20 watt G4 bi-pin halogen lamp.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer. The transformer has an IP56 rating.

## Ordering Information

Luminaire Type

Material

Accessories

TG - Twig Lite

Copper only

CJK150 - Cable Joint Kit  
 SSP/G - Hunza™ Super Spike  
 /R - Retro™ Transformer  
 110/240-12 volt  
 For an alternative LED  
 option start at page 10.4



Ordering Example TG - Twig Lite in Copper

SSP/G - Hunza™ Super Spike  
 (Accessories ordered separately)

**HUNZA**™ PURE  
 OUTDOOR  
 LIGHTING

**HUNZA FACTORY**  
 130 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471  
 Fax: 64-9-528 9361  
[hunza@hunza.co.nz](mailto:hunza@hunza.co.nz)  
[www.hunza.co.nz](http://www.hunza.co.nz)

**INTERNATIONAL CONTACTS:**  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)  
 Specifications may change without notice.  
 Manufactured in New Zealand.  
 © 2009 Hunza Holdings Ltd.

Ver 1.4

## Luminaire Construction

CNC machined from copper only:

Pole - copper 25.4mm (1") x 850mm (33½") tube.

End cap - solid copper 25.4mm (1") rod.

Retro™:

Pole - copper 25.4mm (1") x 410mm (16") tube.

Transformer Pole 63.5mm (2½") x 440mm (17½").

## Mounting

Pole 850mm (33½") directly mounted into the earth or for extra stability in sand or loose ground use a Hunza™ Super Spike. Retro™ set in concrete.

## Features

Lens:

22mm (¾") frosted glass tube.

Gaskets:

Nytral 150° (302°f)

Lamp Holder:

G4 - 350°C (662°f) ceramic multi contact lamp holder with 250°C (480°f) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada.

Hunza™ Super Spike - (Cat. SSP/G). Not for Retro™.

Retro™ transformer 110/240-12 volt (Cat. /R) IP56.

## Standards

IP44  UL1838

Luminaire Weight

12 volt .800kg (1lb 12oz)

Retro™ 1.98kg (4lb 5oz)

## Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

## RETRO™

HUNZA™ 110/240-12 volt ac silicone encapsulated electronic transformer built into the pole, IP56. Dimmable with a suitable dimmer.

## USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with

G4 Bi-Pin 5, 10, 20 watt lamp max.

Retro™ G4 Bi-Pin 10, 20 watt max.



**LED** - Refer sheet no. 10.4

## USA and Canada:



G4 Bi-Pin 5, 10 watt lamp max.

**LED** - Refer sheet no. 10.4

Twig Lite G4 10 watt Bi-Pin lamp - Lens height 700mm (27½")

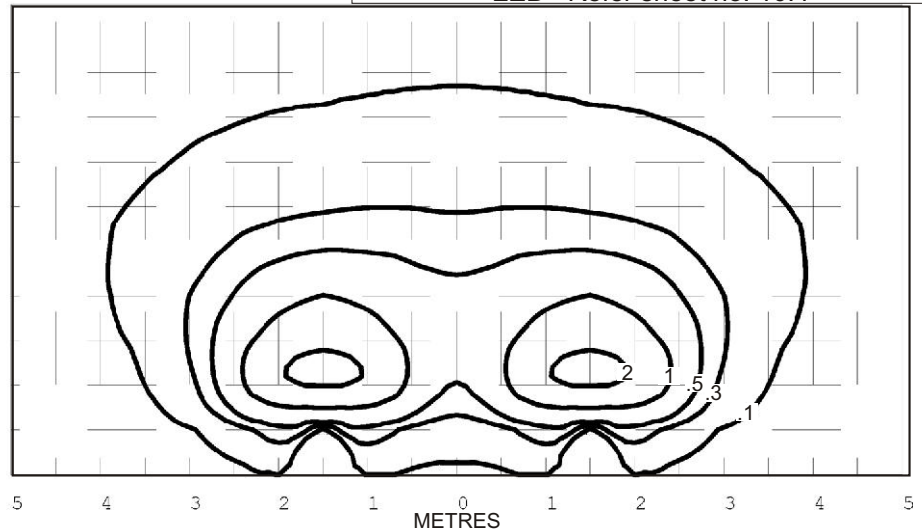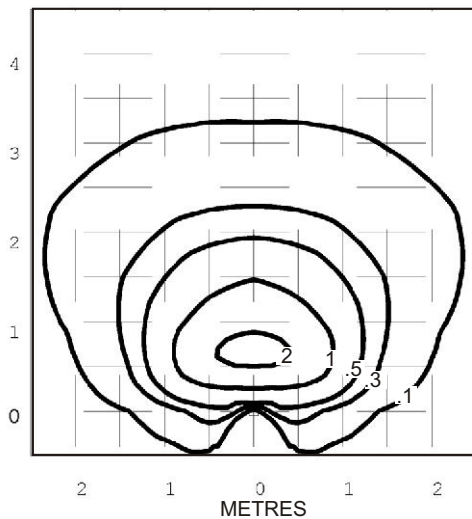

Twig Lite G4 20 watt Bi-Pin lamp - Lens height 700mm (27½")

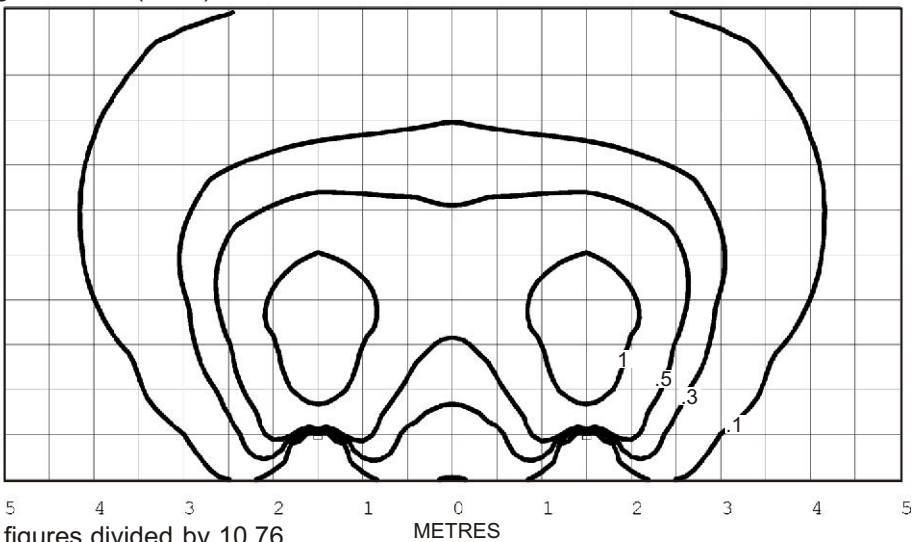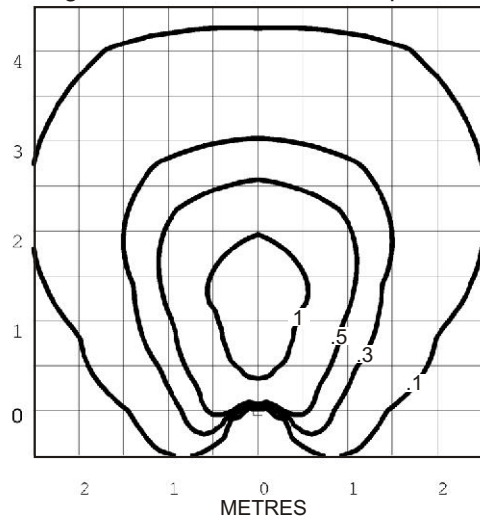

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76

**HUNZA™** PURE  
OUTDOOR  
LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

**INTERNATIONAL CONTACTS:**  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.

© 2009 Hunza Holdings Ltd.

Ver 1.4