
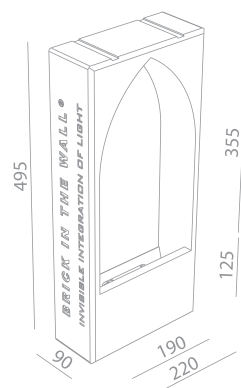
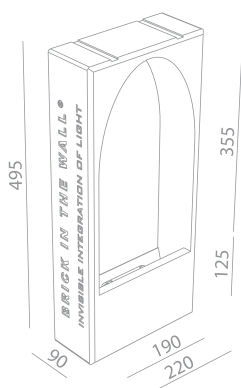


# TECHNICAL DATA SHEET

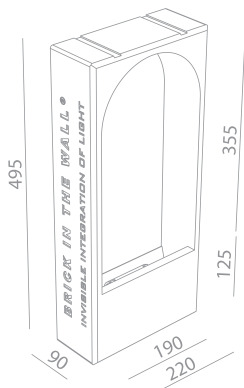

## MOOR 1 LARGE LED 800LM

REF N° 102 71 500 phase DIM CRI 80 2200°K  
 REF N° 102 71 000 phase DIM CRI 90 2700°K  
 REF N° 102 71 100 phase DIM CRI 90 3000°K

230V/50Hz - 9,3W - incl. line voltage driver  
 800lm@85°C - 950lm@25°C -  $\diamond$  - IP20  
 parallel wiring  $\nabla$   $\downarrow$ 0.2m  $\equiv$   $\text{E}$   $\text{CE}$  - 850°C  $\text{P}$   
 2 SDCM - 2 Step MacAdam

## MOOR 2 LARGE LED 800LM

REF N° 102 72 500 phase DIM CRI 80 2200°K  
 REF N° 102 72 000 phase DIM CRI 90 2700°K  
 REF N° 102 72 100 phase DIM CRI 90 3000°K

230V/50Hz - 9,3W - incl. line voltage driver  
 800lm@85°C - 950lm@25°C -  $\diamond$  - IP20  
 parallel wiring  $\nabla$   $\downarrow$ 0.2m  $\equiv$   $\text{E}$   $\text{CE}$  - 850°C  $\text{P}$   
 2 SDCM - 2 Step MacAdam

## MOOR 3 LARGE LED 800LM

REF N° 102 73 500 phase DIM CRI 80 2200°K  
 REF N° 102 73 000 phase DIM CRI 90 2700°K  
 REF N° 102 73 100 phase DIM CRI 90 3000°K

230V/50Hz - 9,3W - incl. line voltage driver  
 800lm@85°C - 950lm@25°C -  $\diamond$  - IP20  
 parallel wiring  $\nabla$   $\downarrow$ 0.2m  $\equiv$   $\text{E}$   $\text{CE}$  - 850°C  $\text{P}$   
 2 SDCM - 2 Step MacAdam

## MOOR 1 LARGE FLUO

REF N° 102 01 026

TC-DEL 26W - G24q-3 - 230V/50Hz -  $\diamond$  incl.  
 EVG -  $\nabla$   $\downarrow$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 2 LARGE FLUO

REF N° 102 02 026

TC-DEL 26W - G24q-3 - 230V/50Hz -  $\diamond$  incl.  
 EVG -  $\nabla$   $\downarrow$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 3 LARGE FLUO

REF N° 102 03 026

TC-DEL 26W - G24q-3 - 230V/50Hz -  $\diamond$  incl.  
 EVG -  $\nabla$   $\downarrow$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 1 LARGE HAL

REF N° 102 01 060

QT-DE - Max 60W - R7s - 230V/50Hz -  $\diamond$   
 dim -  $\nabla$   $\downarrow$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 2 LARGE HAL

REF N° 102 02 060

QT-DE - Max 60W - R7s - 230V/50Hz -  $\diamond$   
 dim -  $\nabla$   $\downarrow$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 3 LARGE HAL

REF N° 102 03 060



QT-DE - Max 60W - R7s - 230V/50Hz -  $\diamond$   
 dim -  $\nabla$   $\downarrow$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

Ready for installation in solid walls. Optional plasterkit for installation into gypsum walls

### PLASTERKIT MOOR LARGE 1/2/3

REF N° 702 01 000 For mounting into gypsum walls.  $\square$  225x500 mm. Housing: perforated aluminium

# TECHNICAL DATA SHEET

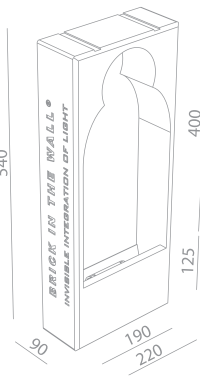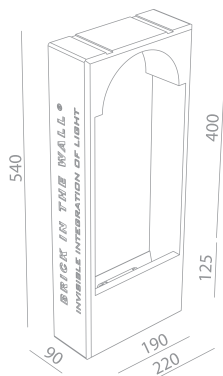

## MOOR 4 LARGE LED 800LM

**REF N° 102 74 500** phase DIM CRI 80 2200°K  
**REF N° 102 74 000** phase DIM CRI 90 2700°K  
**REF N° 102 74 100** phase DIM CRI 90 3000°K

230V/50Hz - 9,3W - incl. line voltage driver  
 800lm@85°C - 950lm@25°C -  $\diamond$  - IP20  
 parallel wiring  $\nabla$   $\perp$  0.2m  $\equiv$   $\text{E}$   $\text{CE}$  - 850°C  $\text{P}$   
 2 SDCM - 2 Step MacAdam

## MOOR 5 LARGE LED 800LM

**REF N° 102 75 500** phase DIM CRI 80 2200°K  
**REF N° 102 75 000** phase DIM CRI 90 2700°K  
**REF N° 102 75 100** phase DIM CRI 90 3000°K

230V/50Hz - 9,3W - incl. line voltage driver  
 800lm@85°C - 950lm@25°C -  $\diamond$  - IP20  
 parallel wiring  $\nabla$   $\perp$  0.2m  $\equiv$   $\text{E}$   $\text{CE}$  - 850°C  $\text{P}$   
 2 SDCM - 2 Step MacAdam

## MOOR 4 LARGE FLUO

**REF N° 102 04 026**

TC-DEL 26W - G24q-3 - 230V/50Hz -  $\diamond$  incl.  
 EVG -  $\nabla$   $\perp$  0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 5 LARGE FLUO

**REF N° 102 05 026**

TC-DEL 26W - G24q-3 - 230V/50Hz -  $\diamond$  incl.  
 EVG -  $\nabla$   $\perp$  0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 4 LARGE HAL

**REF N° 102 04 060**

QT-DE - Max 60W - R7s - 230V/50Hz -  $\diamond$   
 dim -  $\nabla$   $\perp$  0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 5 LARGE HAL

**REF N° 102 05 060**




QT-DE - Max 60W - R7s - 230V/50Hz -  $\diamond$   
 dim -  $\nabla$   $\perp$  0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

Ready for installation in solid walls. Optional plasterkit for installation into gypsum walls

### PLASTERKIT MOOR LARGE 4/5

**REF N° 702 02 000** For mounting into gypsum walls.  $\text{P}$  225x545 mm. Housing: perforated aluminium

# TECHNICAL DATA SHEET

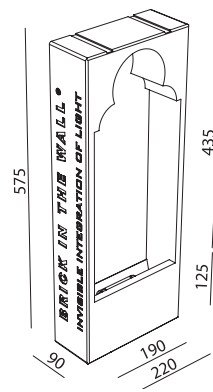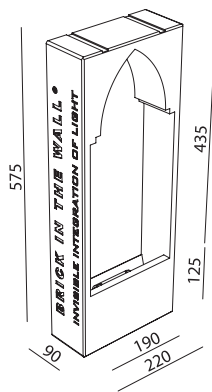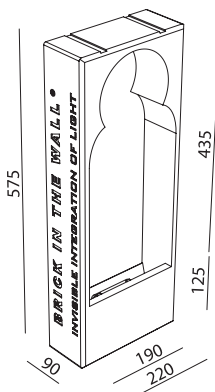

## MOOR 6 LARGE LED 800LM

REF N° 102 76 500 phase DIM CRI 80 2200°K  
 REF N° 102 76 000 phase DIM CRI 90 2700°K  
 REF N° 102 76 100 phase DIM CRI 90 3000°K

230V/50Hz - 9,3W - incl. line voltage driver  
 800lm@85°C - 950lm@25°C -  $\diamond$  - IP20  
 parallel wiring  $\nabla$   $\perp$ 0.2m  $\equiv$   $\text{E}$   $\text{CE}$  - 850°C  $\text{P}$   
 2 SDCM - 2 Step MacAdam

## MOOR 7 LARGE LED 800LM

REF N° 102 77 500 phase DIM CRI 80 2200°K  
 REF N° 102 77 000 phase DIM CRI 90 2700°K  
 REF N° 102 77 100 phase DIM CRI 90 3000°K

230V/50Hz - 9,3W - incl. line voltage driver  
 800lm@85°C - 950lm@25°C -  $\diamond$  - IP20  
 parallel wiring  $\nabla$   $\perp$ 0.2m  $\equiv$   $\text{E}$   $\text{CE}$  - 850°C  $\text{P}$   
 2 SDCM - 2 Step MacAdam

## MOOR 8 LARGE LED 800LM

REF N° 102 78 500 phase DIM CRI 80 2200°K  
 REF N° 102 78 000 phase DIM CRI 90 2700°K  
 REF N° 102 78 100 phase DIM CRI 90 3000°K

230V/50Hz - 9,3W - incl. line voltage driver  
 800lm@85°C - 950lm@25°C -  $\diamond$  - IP20  
 parallel wiring  $\nabla$   $\perp$ 0.2m  $\equiv$   $\text{E}$   $\text{CE}$  - 850°C  $\text{P}$   
 2 SDCM - 2 Step MacAdam

## MOOR 6 LARGE FLUO

REF N° 102 06 026

TC-DEL 26W - G24q-3 - 230V/50Hz -  $\diamond$  incl.  
 EVG -  $\nabla$   $\perp$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 7 LARGE FLUO

REF N° 102 07 026

TC-DEL 26W - G24q-3 - 230V/50Hz -  $\diamond$  incl.  
 EVG -  $\nabla$   $\perp$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 8 LARGE FLUO

REF N° 102 08 026

TC-DEL 26W - G24q-3 - 230V/50Hz -  $\diamond$  incl.  
 EVG -  $\nabla$   $\perp$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 6 LARGE HAL

REF N° 102 06 060

QT-DE - Max 60W - R7s - 230V/50Hz -  $\diamond$   
 dim -  $\nabla$   $\perp$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 7 LARGE HAL

REF N° 102 07 060

QT-DE - Max 60W - R7s - 230V/50Hz -  $\diamond$   
 dim -  $\nabla$   $\perp$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

## MOOR 8 LARGE HAL

REF N° 102 08 060

QT-DE - Max 60W - R7s - 230V/50Hz -  $\diamond$   
 dim -  $\nabla$   $\perp$ 0.5m  $\equiv$   $\text{E}$   $\text{CE}$  - IP20 - 850°C -  $\text{P}$

Ready for installation in solid walls. Optional plasterkit for installation into gypsum walls

### PLASTERKIT MOOR LARGE 6/7/8

REF N° 702 03 000 For mounting into gypsum walls.  $\square$  225x580 mm. Housing: perforated aluminium