

# ULULÌ suspension

Matteo Ugolini design


year 2013

## TECHNICAL SHEET - SE648PG-EXT

### STRUCTURE "A"

|          |                     |   |
|----------|---------------------|---|
| material | fiberglass/<br>lace |  |
| colour   | grey                |   |

### ELECTRICAL CABLE "C"

|          |          |   |
|----------|----------|---|
| material | neoprene |  |
| colour   | green    |   |

### SUSPENSION CABLE "F"

|          |       |  |
|----------|-------|--|
| material | steel |  |
|----------|-------|--|

### ELECTRICAL SYSTEM

|              |               |  |
|--------------|---------------|--|
| socket       | E27           |  |
| source       | max 1x70w     |  |
| energy class | from E to A++ |  |

### PACKAGING


|                 |          |  |
|-----------------|----------|--|
| nr. of collis   | 1        |  |
| net weight/kg   | 3,1      |  |
| gross weight/kg | 5,3      |  |
| packaging/cm    | 50x50x70 |  |


### EMISSION OF LIGHT

unidirectional



### CERTIFICATION

|         |   |  |
|---------|---|--|
| IEC     | 60598-1:2008  |  |
| EN      | 60598-1:2008 + A11:2009   |  |
|         |  |  |
| ip rate | IP65  |  |
| bulb    | class A equipped  |  |

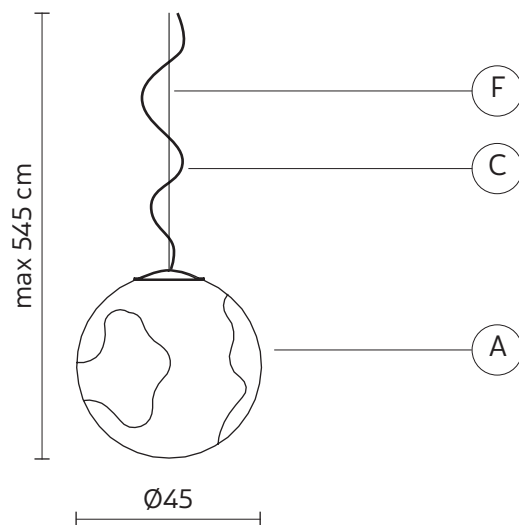

### COLLECTION

available also as floor lamp (indoor and outdoor)

