


FATBOY 2

design: Roberto Mantovani



Supply current


Alimentazione
 Courant d'alimentation
 Stromversorgung
 Corriente de alimentación
350-500 mA (V_f 2,9V)

Power


Potenza
 Puissance
 Bestuekung
 Potencia
1-2 W

Series wiring

Cablaggio in serie
 Câblage en série
 Verkabelung in Serie
 Cableado en serie



Photometric diagrams

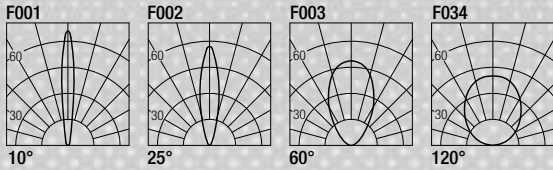

CCT/CRI/Flux

	350mA	500mA
2700K	89 lm	128 lm
3000K	93 lm	133 lm
4200K	103 lm	154 lm
6000K	114 lm	165 lm



Code Construction

Costruzione del codice - Construction du code produit
 Bau der Produkt-Code - Construcción del código de producto

FB1 X X X X

Finishing

Finitura
 Finitions
 Oberflächenfinish
 Acabados

G	N	K	Z
Grey	Black	COR-TEN	INOX AISI 316L
Grigio	Nero		Steel
Gris	Noir		Acciaio
Grau	Schwarz		Acier
	Negro		Stahl
			Acero

Color Temperature

0	1	2	3	6	7	8
2700K	3000K	4200K	6000K	Blue	Green	Red
Température couleur				Blu	Verde	Rosso
Temperaturabhängige Farbe				Bleu	Vert	Rouge
Temperatura de color				Blau	Grün	Rot
				Azul		Rojo

Beam angle

0	1	2	9
10°	25°	60°	120°
Apertura di fascio			
Angle de faisceau			
Strahlwinkel			
Ángulo del haz			

Shape


1	2
Round	Square
Tondo	Quadro
Ronde	Carré
Runde	Quadrat
Redondo	Cuadrado

Optionals

Accessori - Accessoires
 Zubehör - Accesorios

CSFB01

Recessing box
 Controcassa
 Boîtier d'encastrement
 Eingießgehäuse
 Caja de empotrar



Drivers

Alimentatori - Alimentateurs
 Netzteile - Alimentadores

350 mA		500 mA	
on/off	dimmable	on/off	dimmable
AL1034 (1..11) 30mm IP20	AL4000 (1..12) 72mm IP20 PUSH 1..10V	AL1074 (1..7) 30mm IP20	AL4010 (1..12) 72mm IP20 PUSH 1..10V
AL1035 (1..11) 40mm IP20	AL4051 (1..12) 72mm IP20 DALI	AL1077 (1..6) 40mm IP20	AL4151 (1..12) 72mm IP20 DALI
AL1037 (1..16) 55mm IP20 S.P.	AL4053 (1..12) 60mm IP20 IGBT-TRIAC	AL1084 (1..11) 55mm IP20 S.P.	AL4153 (1..12) 60mm IP20 IGBT-TRIAC
AL9011 (1..12) 60mm IP67		AL9051 (1..10) 60mm IP67	