



Aloha 524




Alimentazione
Supply current
Courant d'alimentation
Stromversorgung
Corriente de alimentación
24VDC

Potenza
Power
Puissance
Bestuekung
Potencia
6W


Cablaggio: **in parallelo**
Wiring: **parallel**
Câblage: **parallèle**
Verkabelung: **parallel**
Cableado: **paralelo**

Temperatura colore / Flusso luminoso
Color Temperature / Luminous flux
Température couleur / Flux lumineux
Farbtemperatur / Leuchtenlichtstrom
Temperatura de color / Flujo luminoso

HW 2700K 384 lm
WW 3000K 400 lm
NW 4200K 462 lm
CW 6000K 495 lm

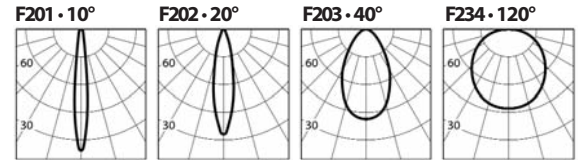

Dimensioni
Dimensions
Größe
Dimensiones

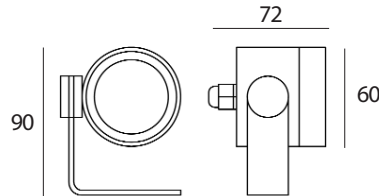

Esempio • Sample • Exemple • Beispiel • Ejemplo

XP521F

Alluminio • WW • 40°
Aluminum
Aluminium
Aluminio

Costruzione del codice
Code construction
Construction du code produit
Bau der Produkt-Code
Construcción del código de producto



XP5 X X X

Finitura
Finishing
Finitions
Oberflächenfinish
Acabados

- 2** Alluminio • Aluminum
Aluminium • Aluminio
- 5** Nero • Black • Noir
Schwarz • Negro
- 6** Bronzo • Bronze
Bronce

Temperatura colore
Color Temperature
Température couleur
Temperaturabhängige Farbe
Temperatura de color

- 0** HW
- 1** WW
- 2** NW
- 3** CW
- 6** Blu • Blue • Bleu
Blau • Azul
- 7** Verde • Green • Vert
Grün
- 8** Rosso • Red • Rouge
Rot • Rojo

Apertura di fascio
Beam angle
Angle de faisceau
Strahlwinkel
Ángulo del haz

- N** 10°
- S** 20°
- F** 40°
- W** 120°