


MADE IN ITALY

Scheda tecnica - Datasheet



LLD



## POINT

Proiettore orientabile IP67, ideale per l'illuminazione di statue, alberi, portici e Ingressi.

Corpo in alluminio anticorodal anodizzato  
Staffa in acciaio inox satinato  
Vetro temperato trasparente

Adjustable spotlight IP67, ideal for the lighting of statues, trees, colonnades and entrances.

Anticorodal aluminium body  
Satinized steel bracket  
Tempered transparent glass



Led Luce e Dintorni s.r.l.

Via dei Laghi 76 - 36077 Altavilla Vicentina (VI)  
Tel. 0444 040857, 0444 040858 - Fax 0444 923464

[lldlight.it](http://lldlight.it) - [info@lldlight.it](mailto:info@lldlight.it)

MADE IN ITALY

Scheda tecnica - Datasheet



LLD



## TECHNICAL DATA

<b>POTENZA ASSORBITA</b> <i>Power Absorption</i>	S: 2W M: 6W L: 12W XL: 18W
<b>ALIMENTAZIONE</b> <i>Supply Voltage</i>	500mA (S, M, XL) – 1000mA (L) 24Vdc
<b>COLLEGAMENTO</b> <i>Connection</i>	Collegamento in serie (500mA-1000mA) – Series connection (500mA-1000mA) Collegamento in parallelo (24Vdc) – Parallel connection (24Vdc)
<b>DURATA MEDIA LED</b> <i>Average LED life</i>	50.000h
<b>COLORI LED DISPONIBILI</b> <i>LED colours available</i>	3000K, 4000K, RGB-W (solo Point M – Only Point M)
<b>CRI</b>	80
<b>FASCI DISPONIBILI</b> <i>Available Lens</i>	S: 15°, 30°, 60° M: 15°, 35°, 60° L: 18°, 46°, 55° XL: 18°, 30°, 55°
<b>FLUSSO LUMINOSO</b> <i>Luminous Flux</i>	S: 170lm (3000K), 180lm (4000K) M: 810lm (3000K), 820lm (4000K) L: 1250lm (3000K), 1500lm (4000K) XL: 2100lm (3000K), 2250lm (4000K)
<b>INSTALLAZIONE</b> <i>Installation</i>	A pavimento/parete/soffitto con staffa inclusa On floor/wall/ceiling with bracket included
<b>TEMPERATURA DI ESERCIZIO</b> <i>Operating Temperature</i>	-10+45°C
<b>CALPESTABILE</b> <i>Walk Over</i>	No
<b>CARRABILE</b> <i>Drive Over</i>	No
<b>GRADO DI PROTEZIONE IP</b> <i>IP rating</i>	IP67
<b>CLASSE DI CONSUMO ENERGETICO</b> <i>Energy Efficiency Class</i>	A/A+/A++
<b>CLASSE DI ISOLAMENTO</b> <i>Insulation Class</i>	Classe 3 Class 3
<b>PROTEZIONI</b> <i>Protections</i>	WP system (eccetto point M RGB-W – except Point M RGB-W)
<b>PESO</b> <i>Weight</i>	Point S: 0,13Kg Point M: 0,33Kg Point L: 0,6Kg Point XL: 1,3Kg



Led Luce e Dintorni s.r.l.

Via dei Laghi 76 – 36077 Altavilla Vicentina (VI)  
Tel. 0444 040857, 0444 040858 – Fax 0444 923464

lldlight.it – info@lldlight.it

MADE IN ITALY


Scheda tecnica - Datasheet




LLD




### DIMENSIONI – Dimensions

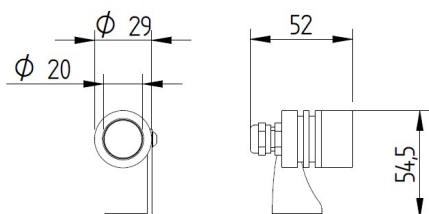


POINT S

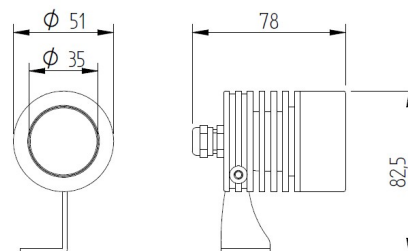

POINT M

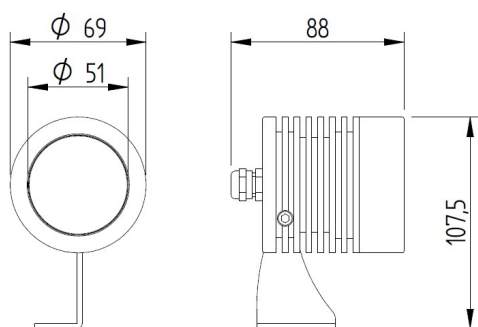


POINT L

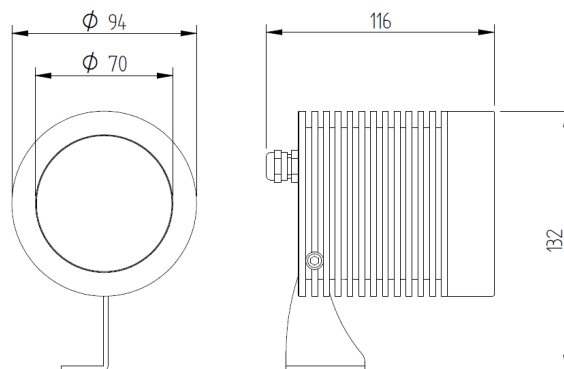

POINT XL

### ACCESSORI – Accessories

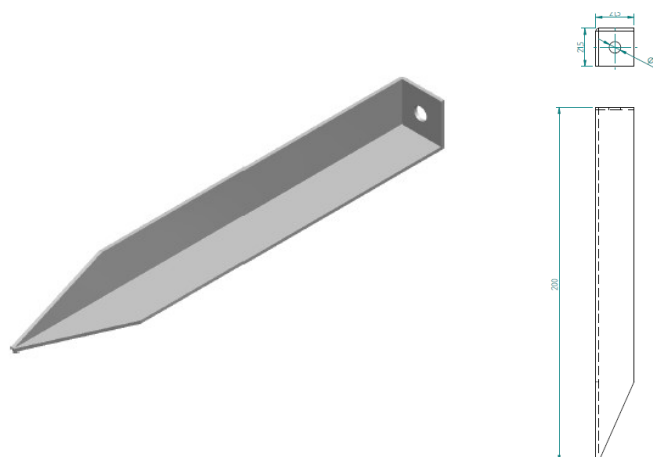

PI002



Led Luce e Dintorni s.r.l.

Via dei Laghi 76 – 36077 Altavilla Vicentina (VI)  
Tel. 0444 040857, 0444 040858 – Fax 0444 923464

lldlight.it – info@lldlight.it