


TULIP 2

design: Lapo Grassellini

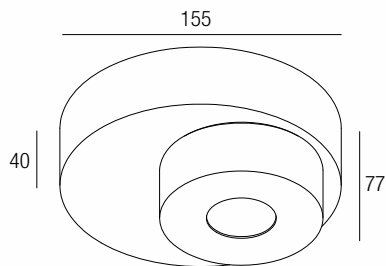

Supply current

Alimentazione
 Courant d'alimentation
 Stromversorgung
 Corriente de alimentación

230 VAC


Power

Potenza
 Pouissance
 Bestuekung
 Potencia

10 W



Photometric diagrams

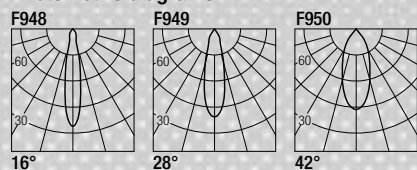

CCT/CRI/Flux

	CRI85	CRI93
2700K	730 lm	690 lm
3000K	830 lm	770 lm
4000K	860 lm	790 lm



Code Construction

Costruzione del codice - Construction du code produit
 Bau der Produkt-Code - Construcción del código de producto

TP2 X X X X

Beam angle
 Apertura di fascio
 Angle de faisceau
 Strahlwinkel
 Ángulo del haz

	S	M	W
	16°	28°	42°

CRI

	8	9
	85	93

Color Temperature
 Temperatura colore
 Température couleur
 Temperaturabhängige Farbe
 Temperatura de color

	2	3	4
	2700K	3000K	4000K

Finishing
 Finitura
 Finitions
 Oberflächenfinish

	1	2	5
	White Bianco Blanc Weiß Blanco	Grey Grigio Gris Grau	Black Nero Noir Schwarz Negro