


TULIP

design: Lapo Grassellini



Supply current

Alimentazione
 Courant d'alimentation
 Stromversorgung
 Corriente de alimentación

250 mA (V_i 37V)


Power

Potenza
 Pouissance
 Bestuekung
 Potencia

10 W



Photometric diagrams

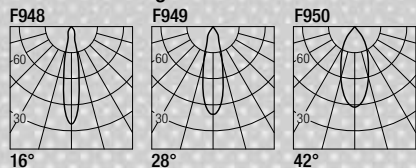

	CRI85	CRI93
2700K	730 lm	690 lm
3000K	830 lm	770 lm
4000K	860 lm	790 lm



Code Construction

Costruzione del codice - Construction du code produit
 Bau der Produkt-Code - Construcción del código de producto

TP1 X X X X

Beam angle

Apertura di fascio
 Angle de faisceau
 Strahlwinkel
 Ángulo del haz

S	M	W
16°	28°	42°

CRI

8	9
85	93

Color Temperature

Temperatura colore
 Température couleur
 Temperaturabhängige Farbe
 Temperatura de color

2	3	4
2700K	3000K	4000K

Finishing

1	2	5
White	Grey	Black
Bianco	Grigio	Nero
Blanc	Gris	Noir
Weiß	Grau	Schwarz
Blanco		Negro

Drivers

Alimentatori - Alimentateurs
 Netzteile - Alimentadores

