


ZERINO

design: Roberto Mantovani



Supply current

Alimentazione
 Courant d'alimentation
 Stromversorgung
 Corriente de alimentación

250 mA (V, 2,9V)


Power

Potenza
 Pouissance
 Bestuekung
 Potencia

0,75 W

Series wiring


Cablaggio in serie
 Câblage en série
 Verkabelung in Serie
 Cableado en serie

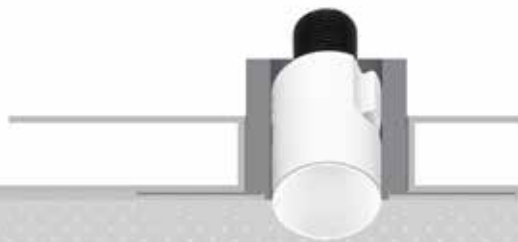

CCT/CRI/Flux

2700K	250mA	71 lm
3000K		75 lm
4200K		86 lm
6000K		91 lm

Photometric diagrams



Code Construction

Costruzione del codice - Construction du code produit
 Bau der Produkt-Code - Construcción del código de producto

ZK1 X X X

Color

Temperature

Temperatura colore
 Température couleur
 Temperaturabhängige Farbe
 Temperatura de color

0	1	2	3	6	7	8
2700K	3000K	4200K	6000K	Blue	Green	Red
				Blu	Verde	Rosso
				Bleu	Vert	Rouge
				Blau	Grün	Rot
				Azul		Rojo

Beam angle

Apertura di fascio
 Angle de faisceau
 Strahlwinkel
 Ángulo del haz

1	2
20°	40°

Finishing


1	5
White	Black
Bianco	Nero
Blanc	Noir
Weiß	Schwarz
Blanco	Negro

Optionals

Accessori - Accessoires
 Zubehör - Accesorios

Plasterboard recessing frame

Flangia per cartongesso
 Boîtier d'encastrement pour plaques de plâtre
 Gehäuses Trockenbau
 Cajetín para placas de yeso



ZQC00K

White
 Bianco
 Blanc
 Weiß
 Blanco

ZQC00KB

Black
 Nero
 Noir
 Schwarz
 Negro

Drivers

Alimentatori - Alimentateurs
 Netzteile - Alimentadores

