


ZETAN 5

design: Roberto Mantovani



Supply current

Alimentazione
Courant d'alimentation
Stromversorgung
Corriente de alimentación

140 mA (V_i 37V)

Power

Potenza
Puissance
Bestuekung
Potencia


5 W



CCT/CRI/Flux

	CRI85	CRI93
2700K	450 lm	425 lm
3000K	510 lm	470 lm
4000K	530 lm	490 lm

Photometric diagrams

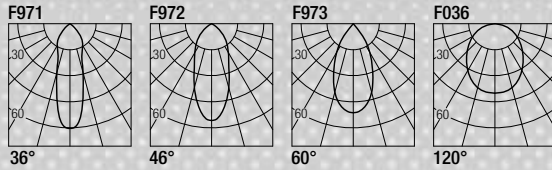

Code Construction

Costruzione del codice - Construction du code produit
Bau der Produkt-Code - Construcción del código de producto

ZN5 X X X X

Beam angle
Apertura di fascio
Angle de faisceau
Strahlwinkel
Ángulo del haz

	S	M	W	X
	36°	46°	60°	120°

Finishing

	B	N
Finitura	White	Black
Finitions	Bianco	Nero
Oberflächenfinish	Blanc	Noir
Acabados	Weiß	Schwarz
	Blanco	Negro

CRI

	8	9
	85	93

Color Temperature
Temperatura colore
Température couleur
Temperaturabhängige Farbe
Temperatura de color


	2	3	4
	2700K	3000K	4000K

Optionals

Accessori - Accessoires
Zubehör - Accesorios

Plasterboard recessing frame

Flangia per cartongesso
Boîtier d'encastrement pour plaques de plâtre
Gehäuses Trockenbau
Cajetín para placas de yeso



ZTC05U ZTC05UB

White	Black
Bianco	Nero
Blanc	Noir
Weiß	Schwarz
Blanco	Negro

L0D5

Low luminace louvre

Filtro antiabbagliamento
Filtre basse luminace
Geringe Leuchtdichte-Filter
Filtro de baja luminancia



Nota: il filtro deve essere ordinato congiuntamente all'apparecchio - **Note:** the filter must be ordered together with the lighting fixture - **Note:** le filtre doit être commandé en même temps que l'appareil - **Anmerkung:** muss der Filter zusammen mit Leuchtkörper bestellt werden
Nota: el filtro debe pedirse junto con la luminaria

Drivers

Alimentatori - Alimentateurs
Netzteile - Alimentadores

