


Technical Data Sheet

Last data update


3/15/2016

9010
novantadieci®

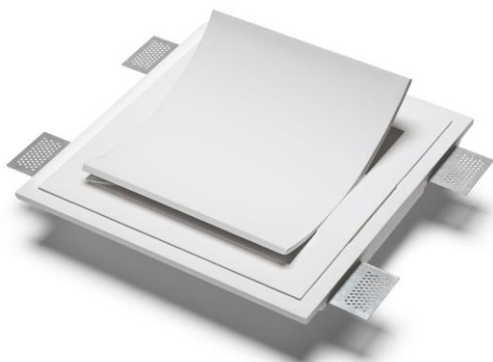

Req. space behind the plasterboard

80mm




hole on the plasterboard

320x320mm



External measures

315x315mm



Measures of the wall lamp

220x205mm



Height without electrical part

80mm



Protrusion

75mm



General notes

SONORE

M001C-4033

Sonore recessed wall lamp / CRISTALY

Surface finish : CRISTALY

LED 16.5W / 700mA / 2750lm / 4000°K / CRI85

Model

Code	M001C
Product family	SONORE
Type	Sonore recessed wall lamp

Material/Surface finish

Code	004
Material	CRISTALY
Surface finish	CRISTALY

Electrical part

Code	4033
Type	LED
Power	16.5W
Current	700mA
Light Output	2750lm
Colour Temperature	4000°K
CRI	85

Dati sistema Sonore

N° Driver	2
Impedenza	8 Ohm
Potenza nominale	40 Wrms
Potenza di picco	80 Wmax
Sensibilità	85 dB/oct
Risposta in Frequenza	200-20000 Hz
Input	da centralina M900

General Data

Protection Index	IP20
Isolation Class	III
Cover	
Weight [Kg]	3,7
Country of production	MADE IN ITALY
Mounting instruction	025.541_9010_REV02

Installation

Multisize system	SI
Position	Wall Lamp


Packaging

Type	White american Box
Measures AxBxH	460x245x350mm
Gross Weight [Kg]	4,5086
Master carton	NO
Quantity of articles	
Measures AxBxH	

Technical Data Sheet

M001C-4033

Fotometric Data

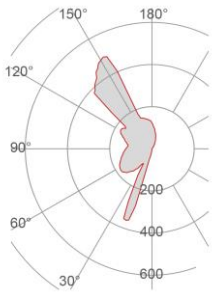


<i>Electrical part</i>	4033
<i>Power</i>	16.5W
<i>Light Output</i>	2750lm
<i>Colour Temperature</i>	4000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	49%
<i>Light Output of the lamp</i>	1347,5lm
<i>Beam Angle</i>	25°\9°
<i>Beam Inclination</i>	\


Illuminance

Accessories

Standard Power Supply




<i>Code</i>	026.255
<i>Measures</i>	88,5x41x23mm
<i>Power</i>	min11,9W max18,2W
<i>Input</i>	220-240V~W
<i>Output</i>	700mA




<i>Code</i>	026.256
<i>Measures</i>	118x42,5x24mm
<i>Power</i>	min25,2W max35,7W
<i>Input</i>	220-240V~W
<i>Output</i>	700mA


Dimmable Power Supply



<i>Code</i>	026.219
<i>Measures</i>	155x51x26mm
<i>Power</i>	19,6W
<i>Input</i>	220-240V~W
<i>Output</i>	700mA
<i>Dimmable</i>	PUSH/0-10V/DALI



<i>Code</i>	026.206
<i>Measures</i>	124x82x23mm
<i>Power</i>	60,2W
<i>Input</i>	180-295V~W
<i>Output</i>	700mA
<i>Dimmable</i>	PUSH/DALI




<i>Code</i>	026.207
<i>Measures</i>	124x82x23mm
<i>Power</i>	60,2W
<i>Input</i>	180-295V~W
<i>Output</i>	700mA
<i>Dimmable</i>	0-10V

Other Accessories

<i>Code</i>	M900A-00
<i>Description</i>	Subwoofer with frequ
<i>Notes</i>	

<i>Code</i>	M900B-00
<i>Description</i>	Subwoofer with audio in
<i>Notes</i>	

<i>Code</i>	M900C-00
<i>Description</i>	Subwoofer with audio
<i>Notes</i>	



<i>Code</i>	099.142
<i>Description</i>	Emergency Kit
<i>Notes</i>	