



Technical Data Sheet

Last data update


7/16/2016

9010
novantadieci®

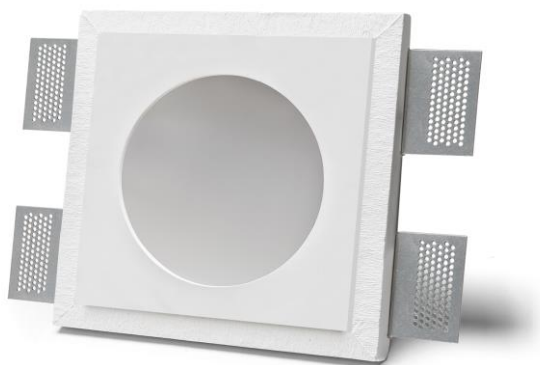


Req. space behind the plasterboard

105mm




hole on the plasterboard

205x205mm



External measures

200x200mm




Measures of the light output

Ø130mm



Height without electrical part

50mm



Height including the electrical part

100mm

Notes on measures

General notes

INCASSO A PLAFONE E PARETE

4044B-3006

Recessed Spotlight / CRISTALY

Surface finish : CRISTALY

LED 6.5W / 350mA / 850lm / 3000°K / CRI85

Model

Code	4044B
Product family	INCASSO A PLAFONE E PARETE
Type	Recessed Spotlight

Material/Surface finish

Code	004
Material	CRISTALY
Surface finish	CRISTALY

Electrical part

Code	3006
Type	LED
Power	6.5W
Current	350mA
Light Output	850lm
Colour Temperature	3000°K
CRI	85
Light Output of the lamp	663lm
Dimmable	SI
Power Supply	Power Supply in counterceiling
Connection	2 PVC cables
Cover	Etched Glass

General Data

Protection Index	IP20-IP44
Isolation Class	III
Weight [Kg]	1,8
Country of production	MADE IN ITALY
Mounting instruction	025.552_9010_REV03

Installation

Multisize system	SI
Position	Ceiling


Packaging

Type	White american Box
Measures AxBxH	320x415x140mm
Gross Weight [Kg]	2,1811
Master carton	NO
Quantity of articles	
Measures AxBxH	

Technical Data Sheet

4044B-3006

Fotometric Data




<i>Electrical part</i>	3006
<i>Power</i>	6.5W
<i>Light Output</i>	850lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	78%
<i>Light Output of the lamp</i>	663lm
<i>Beam Angle</i>	63°
<i>Beam Inclination</i>	0°

<i>Illuminance</i>	<i>1m</i>	<i>479lux</i>
	<i>2m</i>	<i>120lux</i>
	<i>3m</i>	<i>53lux</i>
	<i>4m</i>	<i>30lux</i>
	<i>5m</i>	<i>19lux</i>


Accessories

Housing Box for Brickwork




<i>Code</i>	023.447
<i>Measures</i>	200X200X120mm
<i>Measures of the hole on</i>	230X230X130mm

Standard Power Supply




<i>Code</i>	026.251
<i>Measures</i>	88,5x41x23mm
<i>Power</i>	min6W max8,8W
<i>Input</i>	220-240V~W
<i>Output</i>	350mA




<i>Code</i>	026.252
<i>Measures</i>	88,5x41x23mm
<i>Power</i>	min12,6W max18,2W
<i>Input</i>	220-240V~W
<i>Output</i>	350mA


Dimmable Power Supply



<i>Code</i>	026.219
<i>Measures</i>	155x51x26mm
<i>Power</i>	16,1W
<i>Input</i>	220-240V~W
<i>Output</i>	350mA
<i>Dimmable</i>	PUSH/0-10V/DALI



<i>Code</i>	026.185
<i>Measures</i>	124x82x23mm
<i>Power</i>	min0,7W max35W
<i>Input</i>	180-295V~W
<i>Output</i>	350mA
<i>Dimmable</i>	PUSH/DALI



<i>Code</i>	026.187
<i>Measures</i>	124x82x23mm
<i>Power</i>	min0,7W max35W
<i>Input</i>	180-295V~W
<i>Output</i>	350mA
<i>Dimmable</i>	0-10V

Technical Data Sheet

4044B-3006

9010
novantadieci®

Accessories

Other Accessories



<i>Code</i>	099.142
<i>Description</i>	Emergency Kit
<i>Notes</i>	