


Technical Data Sheet

Last data update


3/15/2016

9010
novantadieci®

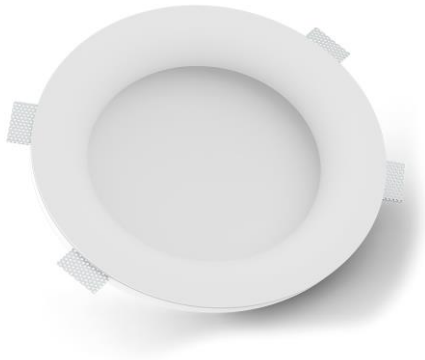

Req. space behind the plasterboard

140(200*)mm



hole on the plasterboard

ø765mm




External measures

ø760mm




Measures of the light output

ø600mm



Height without electrical part

55mm



Height including the electrical part

135mm

Notes on measures

General notes

INCASSO A PLAFONE

4118B-4003

Recessed lighting / CRISTALY

Surface finish : CRISTALY

LED 55W / 24Vdc / 6900lm / 4000°K / CRI85

Model

Code	4118B
Product family	INCASSO A PLAFONE
Type	Recessed lighting

Material/Surface finish

Code	004
Material	CRISTALY
Surface finish	CRISTALY

Electrical part

Code	4003
Type	LED
Power	55W
Tension	24Vdc
Light Output	6900lm
Colour Temperature	4000°K
CRI	85

Light Output of the lamp	2760lm
Dimmable	SI

Power Supply	Power Supply in counterceiling
Connection	Screw Terminal
Cover	

General Data

Protection Index	IP20
Isolation Class	III
Weight [Kg]	13
Country of production	MADE IN ITALY
Mounting instruction	025.498_9010_REV03

Installation

Multisize system	NO
Position	Ceiling


Packaging

Type	White american Box
Measures AxBxH	850x850x300mm
Gross Weight [Kg]	17,443
Master carton	NO
Quantity of articles	
Measures AxBxH	

Technical Data Sheet

4118B-4003

Fotometric Data

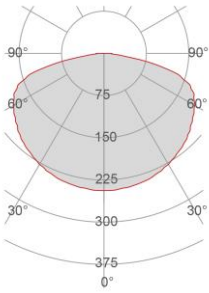


<i>Electrical part</i>	4003_55
<i>Power</i>	55W
<i>Light Output</i>	6900lm
<i>Colour Temperature</i>	4000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	40%
<i>Light Output of the lamp</i>	2760lm
<i>Beam Angle</i>	150°
<i>Beam Inclination</i>	0°


<i>Illuminance</i>	1m	673lux
	2m	168lux
	3m	75lux
	4m	42lux
	5m	27lux

Accessories


Standard Power Supply



<i>Code</i>	026.260
<i>Measures</i>	157x54x36mm
<i>Power</i>	60W
<i>Input</i>	220-240V~W
<i>Output</i>	24Vdc




<i>Code</i>	026.261
<i>Measures</i>	219x63x35.5mm
<i>Power</i>	150W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc




<i>Code</i>	026.262
<i>Measures</i>	244x71x35.5mm
<i>Power</i>	240W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc


Dimmable Power Supply



<i>Code</i>	026.209
<i>Measures</i>	125x82x29mm
<i>Power</i>	60W
<i>Input</i>	220-240 V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/1-10V




<i>Code</i>	026.190+026.261
<i>Measures</i>	156x52x24mm
<i>Power</i>	150W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/0-10V/DALI



<i>Code</i>	026.190+026.262
<i>Measures</i>	156x52x24mm
<i>Power</i>	240W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/0-10V/DALI

Other Accessories



<i>Code</i>	099.142
<i>Description</i>	Emergency Kit
<i>Notes</i>	