


Technical Data Sheet

Last data update


3/24/2016

9010
novantadieci®

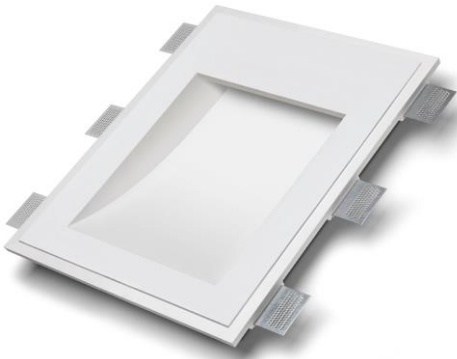


Req. space behind the plasterboard

80mm




hole on the plasterboard

305x465mm



External measures

300x460mm



Measures of the light output

210x300mm



Height without electrical part

80mm



Height including the electrical part

80mm

Notes on measures

General notes

INCASSO DA PARETE

2416C-4031

Recessed Wall lamp / CRISTALY

Surface finish : CRISTALY

LED 16.5W / 700mA / 2750lm / 4000°K / CRI85

Model

Code	2416C
Product family	INCASSO DA PARETE
Type	Recessed Wall lamp

Material/Surface finish

Code	004
Material	CRISTALY
Surface finish	CRISTALY

Electrical part

Code	4031
Type	LED
Power	16.5W
Current	700mA
Light Output	2750lm
Colour Temperature	4000°K
CRI	85
Light Output of the lamp	2145lm
Dimmable	SI
Power Supply	Power Supply in counterceiling
Connection	2 PVC cables
Cover	Transparent Silicon Paint

General Data

Protection Index	IP20
Isolation Class	III
Weight [Kg]	4,9
Country of production	MADE IN ITALY
Mounting instruction	025.551_9010_REV02

Installation

Multisize system	SI
Position	Wall


Packaging

Type	White american Box
Measures AxBxH	530x400x175mm
Gross Weight [Kg]	5,6606
Master carton	NO
Quantity of articles	
Measures AxBxH	

Technical Data Sheet

2416C-4031

Fotometric Data

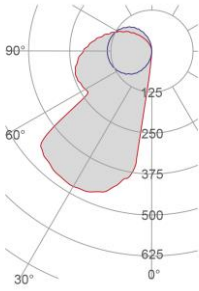


<i>Electrical part</i>	4031
<i>Power</i>	16.5W
<i>Light Output</i>	2750lm
<i>Colour Temperature</i>	4000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	78%
<i>Light Output of the lamp</i>	2145lm
<i>Beam Angle</i>	48°
<i>Beam Inclination</i>	32°

Illuminance


Accessories

Housing Box for Brickwork




<i>Code</i>	023.4008
<i>Measures</i>	305X465X85mm
<i>Measures of the hole on</i>	335X495X95mm

Standard Power Supply




<i>Code</i>	026.255
<i>Measures</i>	88,5x41x23mm
<i>Power</i>	min11,9W max18,2W
<i>Input</i>	220-240V~W
<i>Output</i>	700mA




<i>Code</i>	026.256
<i>Measures</i>	118x42,5x24mm
<i>Power</i>	min25,2W max35,7W
<i>Input</i>	220-240V~W
<i>Output</i>	700mA


Dimmable Power Supply



<i>Code</i>	026.219
<i>Measures</i>	155x51x26mm
<i>Power</i>	19,6W
<i>Input</i>	220-240V~W
<i>Output</i>	700mA
<i>Dimmable</i>	PUSH/0-10V/DALI



<i>Code</i>	026.206
<i>Measures</i>	124x82x23mm
<i>Power</i>	60,2W
<i>Input</i>	180-295V~W
<i>Output</i>	700mA
<i>Dimmable</i>	PUSH/DALI



<i>Code</i>	026.207
<i>Measures</i>	124x82x23mm
<i>Power</i>	60,2W
<i>Input</i>	180-295V~W
<i>Output</i>	700mA
<i>Dimmable</i>	0-10V


Technical Data Sheet

2416C-4031

9010
novantadieci®

Accessories

Other Accessories



<i>Code</i>	099.142
<i>Description</i>	Emergency Kit
<i>Notes</i>	