


Technical Data Sheet

Last data update


7/16/2016

9010
novantadieci®

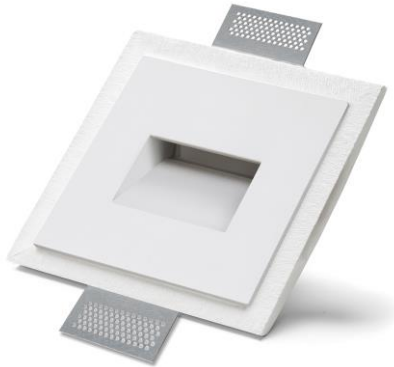


Req. space behind the plasterboard

50mm




hole on the plasterboard

140x140mm



External measures

135x135mm



Measures of the light output

55x40mm



Height without electrical part

40mm



Height including the electrical part

40mm

Notes on measures

General notes

PASSO

4154B-2704

Recessed Spotlight / CRISTALY

Surface finish : CRISTALY

LED 1.1W / 24Vdc / 95lm / 2700°K / CRI85

Model

| | |
|----------------|--------------------|
| Code | 4154B |
| Product family | PASSO |
| Type | Recessed Spotlight |

Material/Surface finish

| | |
|----------------|----------|
| Code | 004 |
| Material | CRISTALY |
| Surface finish | CRISTALY |

Electrical part

| | |
|--------------------------|---------------------------|
| Code | 2704 |
| Type | LED |
| Power | 1.1W |
| Tension | 24Vdc |
| Light Output | 95lm |
| Colour Temperature | 2700°K |
| CRI | 85 |
| Light Output of the lamp | 78,85lm |
| Dimmable | SI |
| Power Supply | by Remote Power Supply |
| Connection | 2 PVC cables |
| Cover | Transparent Polycarbonate |

General Data

| | |
|-----------------------|--------------------|
| Protection Index | IP20 |
| Isolation Class | III |
| Weight [Kg] | 0,65 |
| Country of production | MADE IN ITALY |
| Mounting instruction | 025.553_9010_REV02 |

Installation

| | |
|------------------|-----------------------|
| Multisize system | SI |
| Position | Wall/Ceiling lighting |


Packaging

| | |
|----------------------|-------------------|
| Type | White die-cut Box |
| Measures AxBxH | 165x165x116mm |
| Gross Weight [Kg] | 0,7147 |
| Master carton | NO |
| Quantity of articles | |
| Measures AxBxH | |

Technical Data Sheet

4154B-2704

Fotometric Data

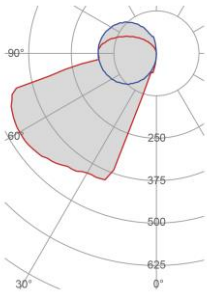


| | |
|---------------------------------|----------|
| <i>Electrical part</i> | 2704_1,1 |
| <i>Power</i> | 1.1W |
| <i>Light Output</i> | 95lm |
| <i>Colour Temperature</i> | 2700°K |
| <i>CRI</i> | 85 |
| | |
| <i>Lamp Light Output</i> | 83% |
| <i>Light Output of the lamp</i> | 78,85lm |
| <i>Beam Angle</i> | 63° |
| <i>Beam Inclination</i> | 50° |

| | | |
|--------------------|------|--------|
| <i>Illuminance</i> | 0.3m | 407lux |
| | 0.5m | 146lux |
| | 1m | 37lux |


Accessories

Housing Box for Brickwork




Code 023.478
Measures 140X140X75mm
Measures of the hole on 170X170X85mm

Standard Power Supply



Code 026.258
Measures 130x42x23mm
Power 12W
Input 220-240V~W
Output 24Vdc




Code 026.259
Measures 167x45x30mm
Power 36W
Input 220-240V~W
Output 24Vdc




Code 026.260
Measures 157x54x36mm
Power 60W
Input 220-240V~W
Output 24Vdc

Dimmable Power Supply



Code 026.219
Measures 155x51x26mm
Power 21,6W
Input 220-240V~W
Output 24Vdc
Dimmable PUSH/0-10V/DALI



Code 026.209
Measures 125x82x29mm
Power 60W
Input 220-240 V~W
Output 24Vdc
Dimmable PUSH/1-10V


Technical Data Sheet

4154B-2704

9010
novantadieci®

Accessories

Other Accessories



| | |
|--------------------|---------------|
| <i>Code</i> | 099.142 |
| <i>Description</i> | Emergency Kit |
| <i>Notes</i> | |